1.0

4.5
5.0
5.6
6.3

2.8

2.5

3.2

2.2

3.6

1.1

4.0

2.0

1.8

1.25

1.4

1.6

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

AD A075528

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS
BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER

4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
A DESIGN GUIDE FOR NAVAL SHIP PROPULSION PLANTS	THESIS
	6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
MITCHELL, WILLIAM R. Robert/Mitchell	

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
MASS. INST. OF TECHNOLOGY	Master's thesis

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
CODE 031	APR 78
NAVAL POSTGRADUATE SCHOOL MONTEREY, CALIFORNIA, 93940	13. NUMBER OF PAGES 174

14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	15. SECURITY CLASS. (of this report)
	UNCLASS
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

LEVEL

16. DISTRIBUTION STATEMENT (of this Report)

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

174

D D C
RECEIVED
OCT 26 1979
E

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

DESIGN GUIDE; NAVAL SHIP PROPULSION PLANT; PROPULSION PLANT

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

SEE REVERSE

251 450

DD FORM 1473 EDITION OF 1 NOV 68 IS OBSOLETE
1 JAN 73
(Page 1) S/N 0102-014-6601 |

UNCLASS

79 10 19 066

A DESIGN GUIDE FOR
NAVAL SHIP PROPULSION PLANTS
by
WILLIAM ROBERT MICHELL

Submitted to the Department of Ocean Engineering on

April 27, 1978, in partial fulfillment of the requirements

for the degrees of Ocean Engineer and Master of Science in

Naval Architecture and Marine Engineer.

ABSTRACT

A design guide for Naval Ship propulsion plants is
developed and a sample problem is presented to demonstrate
its usefulness and validity. Although the methodology
discussed is not limited in scope, the plants addressed
(and for which supporting data is included) are the con-
ventional state-of-the-art plants in use today: Nuclear,
1200 PSI steam, Gas Turbine, Diesel and Combined Plants.
The design approach is preceded by an introduction to
the various propulsion plant functional areas. This dis-
cussion centers on the part these functional areas play
in the overall design process and on how different plant
types have both desireable and undesireable characteristics.
The design approach coupled with the appendices is
intended to enable a feasibility study to be made solely
from the information contained in this thesis and a reason-
able amount of input information. A sample problem using
only the design approach and information in the thesis is
presented to test this premise.

Thesis Supervisor: Franklin P. Alvarez

Title: Associate Professor of Ocean Engineering

A DESIGN GUIDE FOR
NAVAL SHIP PROPULSION PLANTS

by

WILLIAM ROBERT MICHELL

B.S., Eng. Phys., University of Colorado
(1971)

SUBMITTED IN PARTIAL FULFILLMENT
OF THE REQUIREMENTS FOR THE
DEGREE OF

OCEAN ENGINEER

and

MASTER OF SCIENCE IN NAVAL
ARCHITECTURE AND MARINE ENGINEER

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

(DATE: APRIL, 1978)

Signature of Author.... *William R Michell* ....
Department of Ocean Engineering, April 27, 1978

Certified by...... *Franklin L Alvarez* ....
Thesis Supervisor

Accepted by.....................................
Chairman, Department Committee

A DESIGN GUIDE FOR
NAVAL SHIP PROPULSION PLANTS
by
WILLIAM ROBERT MICHELL

Submitted to the Department of Ocean Engineering on

April 27, 1978, in partial fulfillment of the requirements

for the degrees of Ocean Engineer and Master of Science in

Naval Architecture and Marine Engineer.

ABSTRACT

A design guide for Naval Ship propulsion plants is
developed and a sample problem is presented to demonstrate
its usefulness and validity. Although the methodology
discussed is not limited in scope, the plants addressed
(and for which supporting data is included) are the con-
ventional state-of-the-art plants in use today: Nuclear,
1200 PSI steam, Gas Turbine, Diesel and Combined Plants.

The design approach is preceeded by an introduction to
the various propulsion plant functional areas. This dis-
cussion centers on the part these functional areas play
in the overall design process and on how different plant
types have both desireable and undesireable characteristics.

The design approach coupled with the appendices is
intended to enable a feasibility study to be made solely
from the information contained in this thesis and a reason-
able amount of input information. A sample problem using
only the design approach and information in the thesis is
presented to test this premise.

Thesis Supervisor: Franklin F. Alvarez

Title: Associate Professor of Ocean Engineering

ACKNOWLEDGEMENTS

The author wishes to acknowledge the significant contributions made to the content and scope of this thesis by Cdr. Frank F. Alvarez and also to express his sincere thanks to his wife, Alice, for her help in typing the final draft.

TABLE OF CONTENTS

LIST OF FIGURES

10

LIST OF SYMBOLS

B	Beam
C_p	Prismatic Coeffecient
C_x	Mid Ship Coeffecient
CODAG	Combined Diesel and Gas Turbine
COGAG	Combined Gas Turbine and Gas Turbine
COGAS	Combined Gas Turbine and Steam
COGOG	Combined Gas Turbine or Gas Turbine
COSAG	Combined Steam and Gas Turbine
CRP	Controllable Reversible Pitch
d	Gear Diameter
EAR	Expanded Area Ratio
EHP	Effective Horsepower
EHP_{APP}	Effective Horsepower (with appendages)
EHP_{BH}	Effective Horsepower (bare-hull)
EHP_x	Effective Horsepower (series x)
EOOW	Engineering Officer of the Watch
FOM	Figure of Merit
GT	Gas Turbine
$HP_{SSTG'S}$	Horsepower of Ship's Service Turbine Generator
J	Advance Ratio
K_t	Thrust Coeffecient
KW	Kilowatt

KW_I	Installed Kilowatts
L	Ship's Length
LCC	Life Cycle Cost
MDCS	Maintenance Data Collection System
MDT	Mean Downtime
MTBF	Mean Time Between Failure
MTBM	Mean Time Between Maintenance
MTTR	Mean Time To Repair
ND	Naval Distillate
NSFO	Navy Special Fuel Oil
P/D	Propeller Pitch to Diameter Ratio
PC	Propulsive Coeffecient
PSI	Pounds per Square Inch
q_t	Dynamic Pressure
R	Resistance
R_{APP}	Resistance With Appendages
RMA	Reliability, Maintainability and Availability
RPM	Revolutions Per Minute
R_T	Towed Resistance
R(t)	Reliability (as a function of time)
SFC	Specific Fuel Consumption
SHP	Shaft Horsepower
SHP_I	Installed Shaft Horsepower
T	Draft
T	Thrust
t	Thrust Deduction Factor

V	Ship's Speed
V_a	Speed of Advance
V_{end}	Endurance Speed
V_{sus}	Sustained Speed
W	Weight
w	Wake Fraction
W_f	Fuel Weight
W_{200}	Weight Group 200
Δ	Displacement
η_H	Hull Effeciency
η_o	Open Water Propeller Effeciency
η_R	Relative Rotative Effeciency
ρ	Density of Salt Water
σ	Local Cavitation Number
λ	$\dfrac{1}{\text{MTBF}}$
μ	$\dfrac{1}{\text{MTTR}}$

INTRODUCTION

Naval ships are designed for payload considerations, not propulsion plants; yet, when considering such factors as weight, volume, manning and cost the propulsion plant normally has the most significant impact on the ship, and thus upon payload. Typical ranges of influence in these areas are (1):

DESIGN CHARACTERISTIC	PERCENT OF TOTAL SHIP
WEIGHT (including fuel)	30%-40%
VOLUME (including fuel)	20%-30%
COST: acquisition	10%-25%
life cycle	20%-30%
MANNING (engineering)	20%-25%

In addition to the above characteristics there is considerable impact on Logistic Support. Propulsion plant maintenance represents a large percentage of the work load during major overhauls and at the intermediate support level. Regardless of how you view ship design, it would be hard to find a functional design area with more impact than propulsion.

Figure 1 shows how propulsion fits into the overall design process (1).

Beyond the obvious propulsion design objectives of optimizing cost and performance are still more specific goals.

1 Numbers in parenthesis refer to References

SHIP SYSTEM

CONTAINMENT	MISSION SUPPORT	MOBILITY	SHIP SUPPORT	HUMAN SUPPORT
hull structure	armament	* PROPULSION	pollution control	habitability
hull form	command & control	maneuvering	fluid & gas sys	hotel services
mass properties	exterior comm	navigation	ECS	
ship arrgmts	surveillance	anchoring mooring & towing	materials handling	
	counter measures		interior comm	
	fire control		electric plant	

FIGURE 1

15

The relative importance of these goals will depend primarily on the requirements, constraints and philosophies generated in the early stages of conceptual design.

DESIRED PROPULSION SYSTEM DESIGN GOALS (1)

HIGH	LOW
power	volume
availability	weight
reliability	fuel consumption
	cost
	maintenance
	manning
	noise
	risk

Even the best propulsion designer would find it impossible to optimize all the above characteristics in his design; this is not even a rational objective. What the designer does attempt to do is tailor the design to best satisfy the established requirements for a particular ship. Arriving at a 'best' propulsion plant in this manner will depend on the soundness of the design methodology.

This thesis presents a design methodology which enables the propulsion plant designer to select a propulsion plant given the design requirements, constraints and philosophy. It is limited to the conceptual design phase, and therefore the end results may not be the 'best candidate' but the 'best candidates'. However, since propulsion plant design

is an iterative process the methodology need only be re-
applied, with increasing levels of detail, to arrive at a
single plant.

Section 1 is an introduction and/or review of the various
functional areas that comprise the propulsion system. Each
area is discussed with respect to its contribution to the
system as a whole. Also, within each area, the different
components available for use are addressed in some detail.
Their advantages, disadvantages and impact on subsequent
functional areas are presented in this section.

Section 2 introduces a design methodology, which can be
used in selecting a 'best' propulsion plant for a given
ship: From among those analyzed. The approach outlined
permits the designer to determine the adequacy of various
components available in each functional area:

> ENERGY PRODUCTION
> ENERGY CONVERSION
> POWER GENERATION
> POWER TRANSMISSION

Explaining the best way of integrating the different
components into a feasible plant and sizing the finished
product is a major objective of this section.

Section 3 is an example propulsion plant design. It
employs the methodology presented in Section 2; and is

supported by information contained in the thesis. The
example starts with basic inputs, not unlike the informa-
tion available in a real design situation. The end result
of the example is a propulsion plant capable of meeting all
the desired requirements; and one that is a best fit, with
respect to the design inputs.

The Appendicies go beyond the normal contribution of
just supplemental information. They are, in fact, the key
to making this thesis a self-contained conceptual propulsion
plant design workbook. An in-depth discussion, and accom-
panying example, of each major design step can be found in
the appendicies. There is also a complete set of weight and
volume graphs covering almost every major propulsion plant
component. This is similar to information found in most
good synthesis design programs, but in a more useable format.
Also included is performance data on specific propulsion
plant machinery.

1. PROPULSION PLANT FUNCTIONAL AREAS

1.1 INTRODUCTION Propulsion plant design is a process that combines energy converters, prime movers, transmissions and propulsors in a variety of ways to obtain a number of candidate plants. The overall system performance, size and weight of these synthesized models will ultimately determine which plant is to be selected. And since system characteristics are a consequence of the individual components, the advantages, disadvantages and operating peculiarities of these components will be discussed first. The discussion assumes a basic familiarity, on the part of the reader, with the fundamental operating theory of each subsystem element. Table 1.1 lists propulsion components according to their functional area.

1.2 ENERGY SOURCES The two basic types of fuel commonly stocked at bunkering stations for marine use are the heavy residuals and the more refined distillates. When Navy Special Fuel Oil (NSFO) was the accepted fuel for most Navy ships (steam plants), the economics of burning distillates could have had an influence on propulsion plant selection. Refining costs make distillate grades more expensive than NSFO. Specifically, plants capable of burning the cheap,

PROPULSION PLANT FUNCTIONAL AREAS

ENERGY SOURCES

1. Marine Diesel
2. JP-5
3. NSFO
4. Nuclear Fuel
5. Naval Distillate (ND)
6. Bunker-C

ENERGY CONVERSION DEVICES

1. Oil Fired Steam Generator (Boiler)
2. Diesel Engines (Internal Combustion)
3. Gas Turbine (Internal Combustion)
4. Nuclear Reactor

POWER GENERATORS

1. Steam Turbines
2. Gas Turbines
3. Diesel Engine

POWER TRANSMISSIONS

1. Speed Reduction: Reduction Gears
2. Power Transmission: Shafting and Bearings
3. Thrust Production: Propellers 1. fixed pitch
                                    2. controllable pitch
                                    3. jet pump

4. Electrical

CONTROL

1. Manual
2. Semi-Automatic
3. Automatic

Table 1.1

heavy residuals would have a lower life-cycle cost (LCC).
But this factor no longer influences propulsion plant
selection.

In an effort to reduce maintenance and enhance the relia-
bility/availability of 1200 psi boilers, the Navy converted
all of its steam plants to Navy Distillate (ND) in the 1970's.
The results to date suggest the tradeoff was indeed cost
effective. Since the deisels used in Navy ships burn either
marine diesel or JP-5, ND was eventually dropped completely.
The Navy now uses only marine diesel and JP-5: a good move
considering the increase in gas turbine plants. Gas turbines
are more sensitive to fuel impurities than are boilers,
and would have required the distillate fuel regardless of
what the steam plants were using.

Although cost differentials between grades of fuel oil
will no longer have a significant effect on Navy propulsion
plant selection, nuclear fuels vs fossil fuels will still
impact. Nuclear proponents argue that the reduced LCC of
their fuel, coupled with the increasing prices of convention-
al fuels, weighs in their favor. The opponents counter with
increased initial costs, manpower training costs and the
political (and social) issues that continually shroud
nuclear power. But the emphasis on these arguements vary
from year to year, making the energy source costs an unpre-
dictable impact on propulsion plant selection.

1.3 ENERGY CONVERSION/POWER GENERATION Since energy
conversion devices and power generators are either integral
parts (gas turbines and diesels) or almost always considered
as one (boilers and steam turbines), they are discussed as
systems rather than individual components.

1.3.1 GAS TURBINES The gas turbine engine combines energy
conversion and power generation into a single unit. The two
basic sections are a gas generator and a gas turbine. In-
take air is compressed and burned in the generator and then
expanded through the turbine. Figure 1.1 shows a simple GT
with the internal, as well as functional, relationships. The
reason for compressing the air prior to combustion, is that
gases at atmospheric pressures do not provide enough energy
to produce useful torques upon expansion.

The GT requires six to ten times the amount of air of
a comparably rated reciprocal engine. This requirement,
when translated into intake and exhausting plenums, decreases
the power density (SHP/ft^3) considerably. In fact, GT
plants impact heavily on topside arrangements for this same
reason. The GT is also sensitive to the purity and amount
of turbulance of combustion air, which makes intake
engineering critical.

As much as 73% of the energy produced in a simple GT can
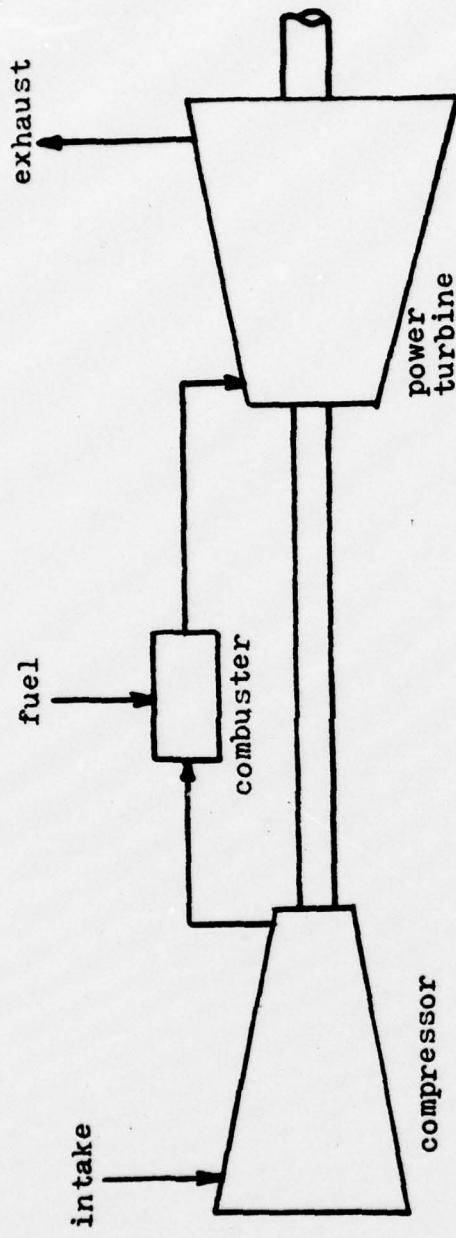
FIGURE 1.1 SIMPLE GAS TURBINE

23

be lost in the exhaust; therefore, GT's are often used in conjunction with some energy recovering device (i.e. waste heat boiler). Furthermore, the GT exhibits poor off-power specific fuel consumption (SFC). Other disadvantages of the GT propulsion plant are: Personnel hazards from airborne noise, SFC sensitivity to air temperatures and unidirectional operation.

The unidirectional operation necessitates the use of some reversing device in power transmission. Whether it is in the form of clutches, reversing reduction gears or reversible pitch propellers, the impact is both technically difficult and expensive. To date the Navy has only used clutches and reversible pitch propellers, but research continues in the other areas.

There are several significant advantages of GT plants which have resulted in their increased use in Naval Combatants. Probably the most important of these is their low specific weight (lbs/SHP) and compactness of the prime mover. These characteristics result in minimal installation efforts and ease of removal as entire units. Quick response, fast start ups and ease of automation are three other GT traits desireable for Navy use.

Because Naval application of GT's has been limited to first and second generation aircraft derivitive models,

their usage has been chiefly in light and medium displacement ships. Table 1.2 lists some gas turbines currently available for marine use.

MODEL	POWER RATING(hp)	MODEL	POWER RATING(hp)
GE LM2500	20,000	FT12A-3	2,500
GE LM1500	12,500	FT12A-6	3,150
GE LM 500	4,560	FT9	
GE LM 100	1,000	501K	3,780
TGP/GTPF 990	5,000	T3001	3,000
FT4A-2	24,200	TF12A	1,000
FT4A-12	26,950	TF14B	1,250
FT4A-14	31,150	TF25A	2,000
FT4C-2	35,500	TF35	2,500

TABLE 1.2 U.S. MADE, LIQUID
FUELED MARINE GT'S

1.3.2 STEAM BOILERS AND TURBINES There is no existing propulsion system in Naval use today with service experience approaching that of the steam-generator (boiler) steam turbine combination. Figure 1.2 is a schematic diagram of a steam plant similar to those found on Navy ships today. These years of steam plant experience have resulted in high system availability, inherent component reliability, readily available parts and experienced manufacturers. It's biggest advantages though are in areas such as cycle flexibility, ability to burn low grade residual fuels, the ease of low speed and reversing operation, and its low temperature thermo-dynamic cycle.

25
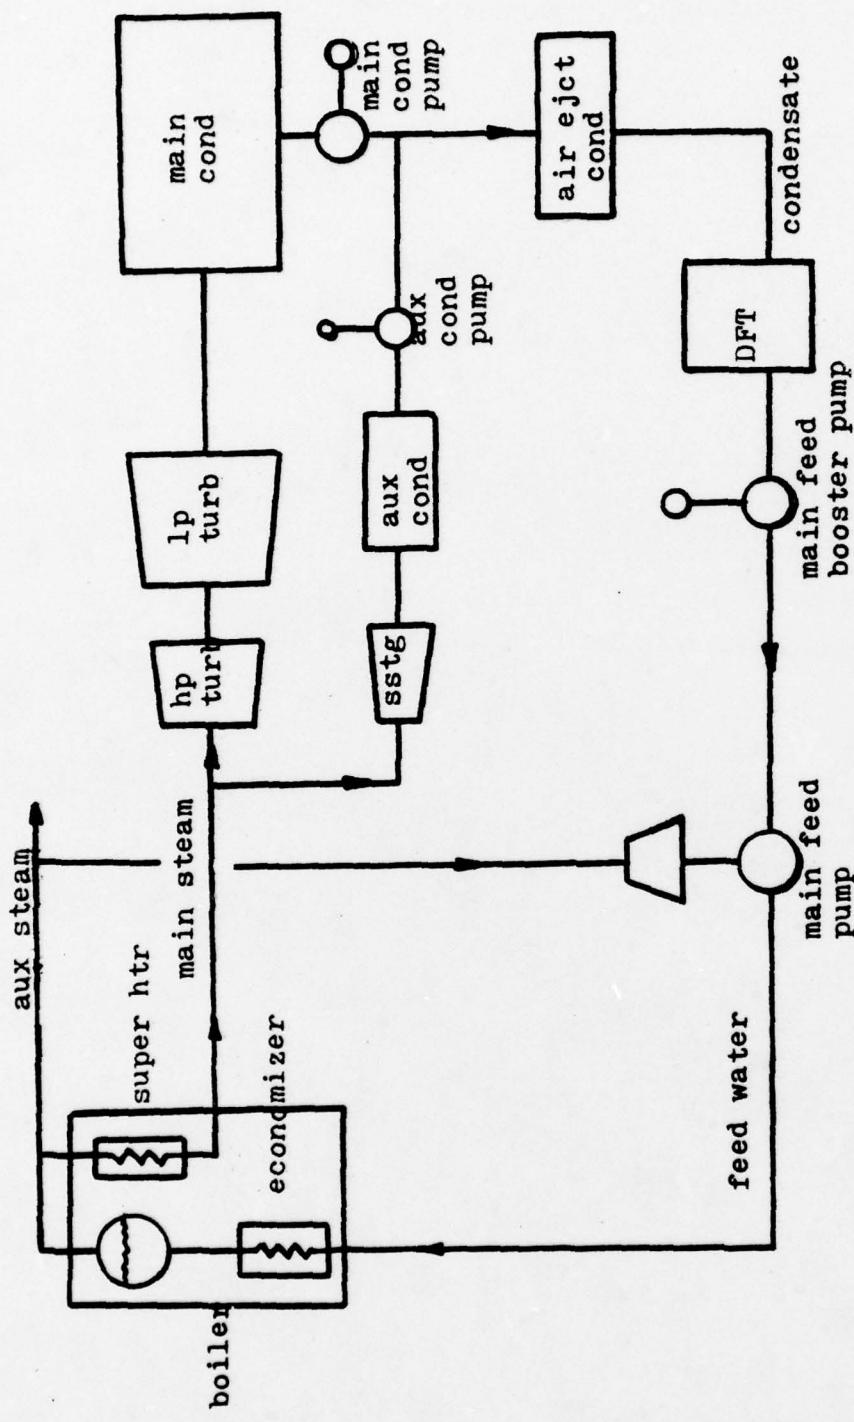
FIGURE 1.2 STEAM PLANT SCHEMATIC

26

Like all propulsion systems steam also has its draw-
backs. Unfortunately, for steam, those less desireable
attributes are in areas of major concern in today's Navy:
Low power density and high manning requirements. Slow start-
ups and a large number of supporting subsystems are addition-
al disadvantages of the steam plant.

In the 1950's steam plants went to higher pressures
(1200 psi) in an attempt to increase SHP without an appre-
ciable increase in machinery size. Lately, because of
increased maintainance in 1200 psi plants, there is talk of
reducing pressures to near 800 psi.

Because of the lack of high powered GT's and the weight
of high powered diesels, steam plants (along with nuclear
power) are considered superior in high SHP applications:
Greater than 80,000 HP.

1.3.3 <u>DIESEL ENGINES</u> When the entire marine industry
(commercial, recreational and Naval) is taken into considera-
tion, the diesel engine is the most widely used prime mover.
This popularity is, in part, linked to the fact that there
are several classes of diesels allowing it to cover the
complete spectrum of power ranges:

CLASS	RPM	POWER RANGE	APPLICATION
High Speed	1800-3000	Up to 500 SHP	Generator Drive Small Boats
Medium High Speed	720-1200	500-3600 SHP	Ferrys Tugs
Medium Speed	400-500	5000-12000SHP	Used singly or in tandum for powers up to 24 K.
Slow Speed	110-130	4000 HP per cylinder	Normally found in ships requiring 20K - 40K SHP

The most attractive features of the diesel engine plants
from a commercial standpoint are its low SFC and ability to
burn low grade fuels without an appreciable increase in
maintenance. But for Naval application, low manning, ease
of automation, fast start-ups and quick response are its
more important characteristics.

The reason diesel engines have not found better accep-
tance in Naval combatants is their low power to weight
ratio. Large commercial ships and Naval auxiliaries (with
their slow speed requirements and high displacements) can live
with this, but it has all but eliminated diesels in high
speed combatants. Other disadvantages are their high self-
generated noise levels, poor slow speed operations and the
necessity to clutch or use a CRP for reversing operations.

28

1.3.4 <u>NUCLEAR POWER</u> No propulsion plant has generated as
much political and social controversy as nuclear power. The
potential radiation hazard associated with nuclear plants
have kept them in the public lime light, but nuclear power's
record over the past twenty years should convince the most
skeptic opponent of its safety. Politically (with respect
to its use in Naval ships) the controversy centers around
nuclear power's initial cost, which is extremely high. This,
of course, is offset by the reduced LCC, so say nuclear pro-
ponents. Beyond these issues lay even more fundamental
advantages and disadvantages, from a design viewpoint.

Nuclear power is used in conjunction with steam tur-
bines but unlike boilers can offer almost instant response to
changes in steam demand. Nuclear power also requires no air
and generates no exhaust, thus eliminating the need for up-
takes. This fact accounts for a low power density and delights
combat systems designers, who are always searching for more
freedom in topside arrangement.

Undoubtedly the best feature of nuclear power propul-
sion for military use is its unlimited range.

The two main disadvantages of nuclear power are a result
of the radiation produced during operation; first it is a
potential health hazard and secondly the shielding necessary
to reduce its effects result in a low power to weight ratio.

1.4 <u>COMBINED CYCLE PLANTS</u> In an attempt to capitalize on the advantages offered by various power generating systems, combinations of prime movers are often utilized in propulsion plant design. An example of this would be the CODAG plant (<u>CO</u>mbined <u>D</u>iesel <u>A</u>nd <u>G</u>as Turbine). In this arrangement a small medium-high speed diesel is used for normal cruising or endurance speeds giving good SFC's and reducing endurance fuel weights; while a gas turbine is installed to assist in providing for high speed operations. Another example might be a COGOG plant (<u>CO</u>mbined <u>G</u>as Turbine <u>O</u>r <u>G</u>as Turbine), where a large and small GT are coupled to the same shaft; the smaller turbine providing power up through the cruising ranges and the larger turbine handling high power requirements.

Whenever combinations such as these are used, particular attention must be paid to the interfacing problems. While enhancing the separate advantages and possibly can - celling the less desireable effects of each system, the designer must be on guard for additional disadvantages arising from their combined use: Such as clutching problems associated with GT's and diesels mechanically linked to the same reduction gears.

The single biggest reason for using combined cycle plants is increased plant efficiency. High speed requirements of Naval combatants dictate high installed SHP, even

though these speeds are called upon less than 10% of the time.
This results in the propulsion plants operating at less
efficient off-design power levels most of the time. The
objective in improving plant efficiency is not the savings
in fuel dollars, but the savings in fuel weight. Reduction
in endurance fuel weight, due to improved 'overall SFC's',
can be transformed into payload: A very desireable tradeoff
in Navy combatants.

Combined cycle plants also provide a means of increasing
the horsepower output of a prime mover above its base rating.
This approach can be seen in a COGAS plant (COmbined Gas
Turbine And Steam). In this setup the GT exhaust is directed
into a waste heat boiler, thus producing steam. The steam
then drives a steam turbine that in turn assists the GT.
This particular combination could result in a GT rated at
25,000 hp actually being the primary energy source for a
35,000 hp propulsion plant.

1.5 POWER TRANSMISSIONS Although electrical power trans-
mission can be found in marine use (most common is submarines),
it is not employed in Naval surface ship propulsion at this
time. And for this reason it is not addressed in this thesis.
It should be pointed out, however, that present reasearch
in super conducting machinery may make electric propulsion
a viable alternative in the future.

1.5.1 <u>REDUCTION GEARS</u> Except for low-speed diesels and
electric drives, all prime movers are coupled to propulsors
through reduction gears. This allows both prime mover and
propulsor to operate at their most effecient RPM. Figure
1.3 shows the most common types of marine reduction gears.

Because weight and size are always a factor in propul-
sion design, the double reduction, double input, locked
train reducer is standard for most high power marine require-
ments. The locked train arrangement splits the torque input
between two gears, reducing the size of the first reduction
gears: The two smaller gears have less weight than one
.larger one. This weight reduction offsets the added parts
and the need for torsionally flexible connections between
first reduction gears and second reduction pinions.

Planetary gears offer the least weight and smallest
envelope for a particular set of conditions. Even with this
advantage over standard gears, the Navy has not yet moved in
the direction of epicyclic reduction gears. The technical
difficulties such as ring gear flexibility, planet gear
load-sharing capabilities, planet gear lubrication, severe
tolerances and bearing design have had much to do with the
Navy's reluctance to use them.

Like all system components, reduction gear design is
left to the experts, but it is necessary for the propulsion
plant designer to be able to size them. Appendix III shows

32
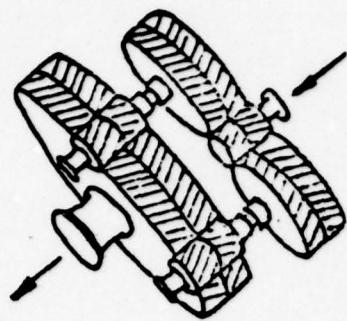
DOUBLE-REDUCTION
SINGLE-INPUT
LOCKED-TRAIN
REDUCER
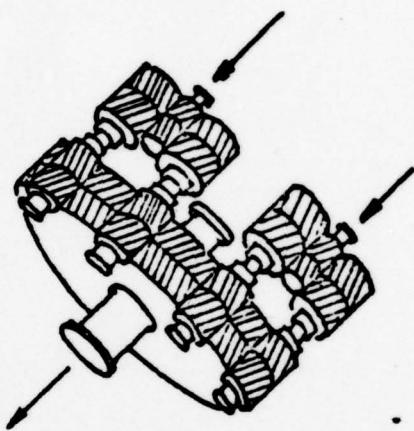
DOUBLE-REDUCTION
DOUBLE-INPUT
LOCKED-TRAIN
REDUCER
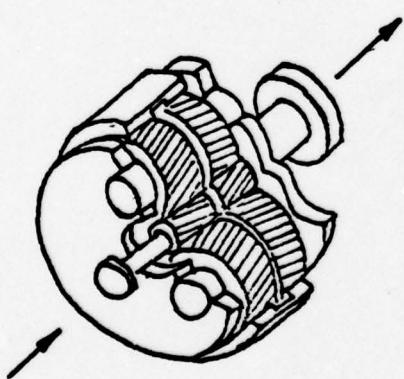
SINGLE-REDUCTION
PLANETARY
REDUCER

FIGURE 1.3

33

how this is accomplished.

1.5.2 <u>SHAFTING</u> The shafting (including shaft bearings) has three primary functions.

1. Transmit power from prime mover to propulsor
2. Support propulsor
3. Transmit thrust from propulsor to ship's hull.

The design requirement in determining shafting material and dimensions is, quite simply, to meet the above objectives with a minimum impact on weight.

Shafting should be able to handle expected torques, bending moments and thrusts with optimum dimensions and bearing spacings. Of these loads, torsion and bending normally have the greatest impact. The tosional load has the following relationship to SHP and RPM:

$$\text{Torsional Load} \propto \frac{\text{SHP}}{\text{RPM}}$$

The Navy usually increases the expected torsional load by factor of 20% as a margin of safety. The most significant bending load is due to the propeller:

$$M_p = W_p L_p$$

M_p - moment due to propeller

W_p - propeller weight (in salt water)

L_p - length between propeller center of gravity and the reaction point of the last shaft bearing

Another shafting tradeoff is hollow vs solid: CRP's need
hollow shafts for hydraulic lines. The smaller the shaft dia-
meter (solid shaft) the smaller the strut bearings; which red-
uces appendage drag. The hollow shaft, on the other hand, red-
uces shaft weight. The degree of weight reduction depends on
the ratio of the inside and outside diameters. The shear stress
in a hollow shaft is related to the inside and outside diameters
in the following manner:

$$S \propto \frac{1}{D_o^4 - D_i^4}$$

So D_i/D_o also becomes a tradeoff factor. Decreasing this ratio
reduces the shaft weight but also reduces the shear stress
margin. All of the factors mentioned here are addressed in the
shafting design process. References 14 and 15 contain this and
additional information for the shaft design. However, for the
scope of this thesis only shafting weight is of significance and
this information is found in Appendix IV.

1.5.3 PROPELLERS Propeller effeciency is the most dominent
factor in determining the propulsive coeffecient. It is
therefore necessary to make a preliminary propeller selection
in order to determine the required SHP. Selection depends on
the number of shafts and the type of plant: Gas turbines and
some diesel plants require reversible pitch propellers. Sel-
criteria varies but the following axioms usually hold:

1. Maximum effeciency at endurance speeds.
2. Minimum cavitation at maximum sustained speeds.

35

In general higher efficiencies are associated with large diameters and low RPM's. The diameter of course is limited by the ship's draft and hull clearance: Normally hull clearance should be about 25% of the propeller diameter(1). For a given diameter the designer can construct an efficiency vs RPM curve. Selecting an RPM from this curve is not always easy. For instance, using an RPM slightly higher than the one corresponding to the maximum efficiency may have a positive impact on machinery weight. This is especially evident in diesels where there is a significant weight difference between low speed, medium speed, medium-high speed and high speed units. For steam turbines, gas turbines and diesels, an increase in RPM serves to reduce the size of the reduction gears.

Where Controllable Reversible Pitch propellers (CRP) are needed, the expanded area ratio (EAR) is important. This is because if EAR is greater than about .78, the blades will not have enough clearance to pass by each other when reversing. CRP's are also restricted to 40,000 SHP (presently) because of mechanical difficulties. The advantages of a CRP are:

    1. The ships speed can be changed while
       running the prime mover at its most
       efficient RPM.
    2. Instant reversing.

If, instead of a diameter, an RPM is specified then the propeller analysis concerns itself with finding an optimum diameter. Appendix II shows the entire propeller selection process.

1.6 CONTROL Fully automatic, remote controlled plants are state-of-the-art. Although this thesis does not address the control aspect of propulsion design, beyond indicating the ease with which a plant-type can be automated, its importance does deserve comment.

Automation is relatively inexpensive with respect to weight and volume but does have some minor technical drawbacks. One arguement, which will take time to evaluate, is the maintainability. This will depend not only on the inherent reliability of the components but on the skill level of the engineering department personnel.

Probably the biggest advantage of automation is its affect on manning reductions. This also helps designers working on habitability problems.

1.7 CONCLUSION As can be seen in this section, there are a wide variety of possible propulsion systems a designer can utilize. Each system or combination of systems has its own unique characteristics, which make it the 'best' choice,

depending on the design requirements, constraints and philosophy employed. The final determination of which plant optimizes a design is normally accomplished through a quantitative selection analysis: See Section 2.10.

Appendix I contains a functional schematic of several popular power generation systems, along with their advantages and disadvantages. This information is intended to provide a basic shopping list for possible propulsion plants. It should aide in determining obvious non-candidates and furthermore suggest which systems are the most likely to meet the design requirements.

2. CONCEPTUAL DESIGN PROCESS

2.1 <u>INTRODUCTION</u> The objective of the conceptual design
stage (for propulsion plants) is the determination of a
feasible and somewhat optimum propulsion plant. Because
it is the type of plant, not specific components, that is
of major importance, the designer must concern himself
primarily with the functional relationships within the
plant. These functional areas can be classified as follows:

1. Energy Conversion
2. Power Generation
3. Power Transmission
4. Propulsion

Within each functional area there exists several
candidates, the characteristics of which will be inputed
into a selection analysis. From this will emerge a 'best'
candidate (or candidates).

The entire propulsion plant design process is similar
to the initial study except that the level of detail increases
in successive stages. Functional relationships are replaced
by specific relationships, emperical data is replaced by
component data and interfacing plays a more dominant role.

2.2 <u>FUNCTIONAL RELATIONSHIPS</u> Defining characteristics
within, and relationships between, the different functional
areas is the first step in conceptual design. This pro-
vides an overview of the possible combinations that exist,
and also quickly demonstrates infeasible combinations.
Figure 2.1 shows some interrelationships of different func-
tional area components. It should be evident from this
figure that certain component combinations are not practical.
For example, a steam turbine would never be used with a
clutch where as a diesel may or may not use one.

Awareness of the functional relationships insures that
the designer knows the subsequent interfacing consequences
of a particular component selection.

2.3 <u>PRIME MOVERS</u> If any propulsion plant component could
be considered the focal point, it would be the prime mover.
It is the prime mover that usually determines which propul-
sor and drive train to use; and it also determines which
energy conversion means is to be utilized. Because of their
importance it is normal to classify propulsion plants
according to their prime movers (except for nuclear power).
This can be seen in more detail in Appendix I.

Another reason prime movers are usually the primary
concern in propulsion plant design is that they are a con-
trolling factor for weight and volume. They either directly

40
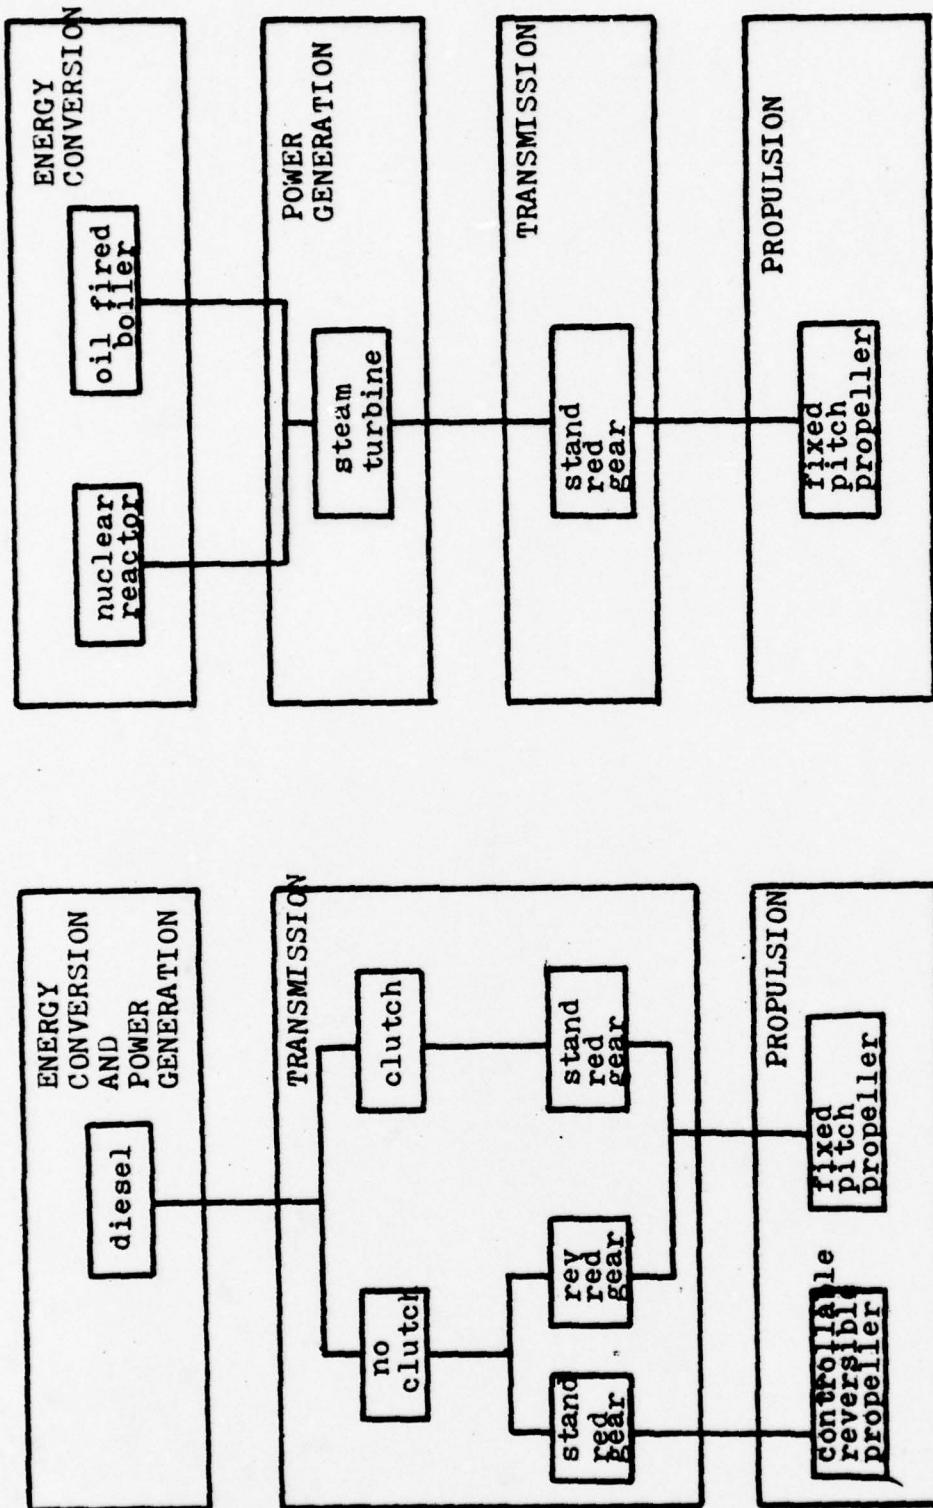
FIGURE 2.1 FEASIBLE PROPULSION PLANT FUNCTIONAL COMBINATIONS

41

or indirectly dictate plant size.

2.4 DESIGN INPUTS Like all designs the starting point for
a propulsion plant design begins with the inputs.[1] Some
quantities are fixed (endurance speed, maximum sustained
speed, etc.), some are just estimates (full load displace-
ment) and others are undefined. It is up to the designer to
integrate the quantitative and qualitative aspects of the
inputs to insure that the final product is the one that best
suits them.

The design requirements, design constraints and design
philosophy are the chief source of the design inputs. Such
things as mission, maximum displacement, maximum sustained
speed, endurance speed, etc. are usually defined in these
sources. Quite often a propulsion plant design philosophy
does not exist 'per-se', and therefore must be interpreted
from the overall ship design philosophy. For instance a
desire to minimize displacement is obviously interpreted
as a restriction on propulsion plant weight.

The first goal of the propulsion designer is to turn the
design inputs into a shaft horse-power requirement. He
can then determine the best method for supplying that
horse-power.

---

1. Cost is always an important constraint/requirement in
    any design, but it will not be discussed here.

42

2.5 PRE-DESIGN SELECTION Very often the design philosophy,

design requirements or design constraints will not permit the

use of a specific plant type; for instance its useless

to consider state-of-the-art nuclear propulsion for a light

weight-high speed frigate because of the weights involved.

Therefore, before applying the design methodology to indi-

vidual plant types, it pays to subject their gross character-

istics to a 'go-no-go' study. This saves time by eliminating

any obvious non-candidate plants from an in depth quantita-

tive analysis. There may by other plants eliminated later

on in the design process for other unforseen reasons, but

at least they must be included at the beginning of the analy-

sis phase.

2.6 INSTALLED SHAFT HORSEPOWER Determining installed

shaft horsepower (SHP_I) is a four step operation:

    1. Find the horse power required to propel
       the bare hull through the water: EHP_{BH}.

    2. Adjust EHP_{BH} to allow for appendage
       resistance: EHP_{APP}.

    3. Calculate the shaft horsepower necessary
       to overcome all losses and provide the
       required EHP_{APP}: SHP.

    4. Increase the SHP by some design factor
       to allow for design unknowns: SHP_I.

2.6.1 <u>EFFECTIVE HORSEPOWER (BARE HULL)</u> What is EHP_{BH} and
how is it calculated? Basically EHP_{BH} is the power the ship
must deliver to the water in order to propel itself: The
ship in this instance refers to the basic hull form free from
any appendages associated with steering, propulsors, weapons,
etc. The magnitude of the resistive forces that must be
overcome by EHP_{BH} (friction forces, wave-making forces, etc.)
vary at different speeds; making a speed vs resistance
graph a good yardstick for the range of EHP_{BH} required. For
the ranges of $V/\sqrt{L}$ that Naval combatants are designed for,
wave making resistance dominates; this factor drives the
hull form to one of increased length and fineness. And since
horsepower varies at greater than the cube of the speed this
has a large impact on the size of the propulsion plant.

Model testing or 'series analysis' are two methods
used to estimate ship resistance. Although model testing
is more exact, it is expensive and not always practical in
the early stages of design. Because of the established
relationships between hull form and resistance, the series
approach is based on previous parent-model tests; and, in
early stages of design, it offers the advantages of speed and
flexibility. Reference (2) outlines both methods in a
step by step example.

If the series approach is used the resultant horsepower

44

is usually refered to as EHP_x (where x refers to the type series used) and is converted to EHP_{BH} using a worm curve. This is an emperical curve that accounts for the difference between the parent hull forms and most destroyer hull forms.

2.6.2 EFFECTIVE HORSEPOWER (WITH APPENDAGES)

Going from EHP_{BH} to EHP_{APP} would be easy if a model were available, but as stated previously this is quite often not the case. Hull projections such as struts, rudders, bilge keels, cathodic protection devices and other common appendages can easily be accounted for through emperical design curves, because their affects are predictable on similar hull forms. Figure 2.2 is an appendage curve applicable to most cruiser/ destroyer hulls (3). It is actually a ratio of resistances, but EHP and resistance are directly proportional.

Although they constitute the greatest deviation from the baseline hull form, sonar domes have little effect on propulsion plant selection. This is because they are normally designed such that they contribute little or no resistance (wave making) at maximum sustained speed; and this, of course, is the same speed that determines propulsion plant size. This is not to imply that the dome does not impact plant size, it can have a pronounced affect on the amount of endurance fuel because of the increase in required horse-
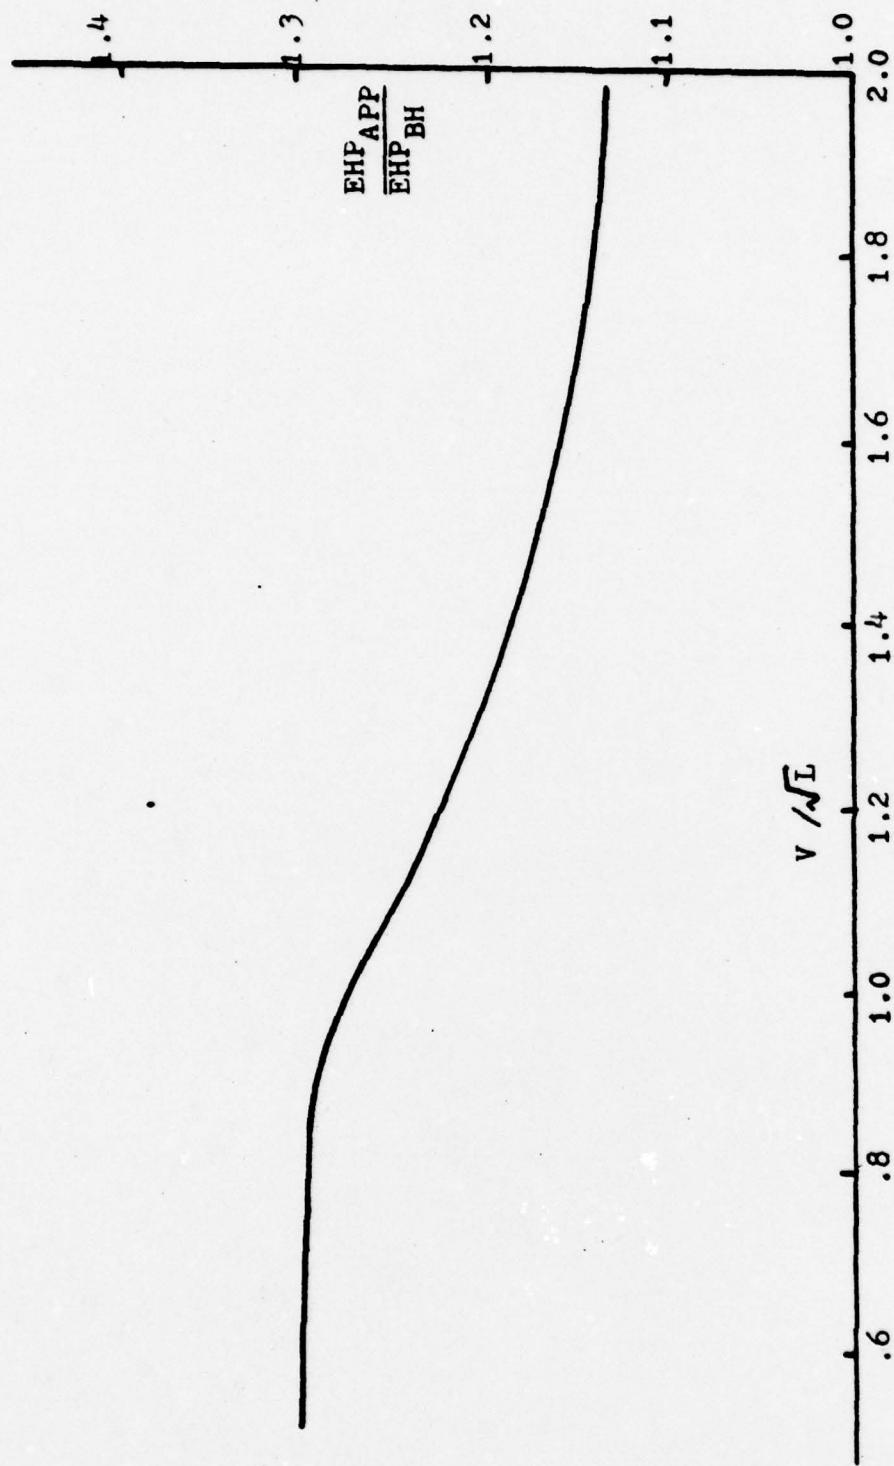
FIGURE 2.2 CRUISER/DESTROYER APPENDAGE CURVE

power at these speeds. The increase will depend on the size relationship between the dome and hull. Obviously the contribution of a sonar dome to the ship's sectional area curve would be much less on a 600 foot cruiser than a 400 foot destroyer; but as a guideline (on the high impact side) Figure 2.3 shows the study of sonar dome affects on the horsepower of a 350 foot destroyer.

2.6.3 <u>SHAFT HORSEPOWER (SHP)</u> After EHP_{APP} is established the designer must determine the propulsive coeffecient (PC): This factor accounts for the losses in going from EHP_{APP} to SHP. Calculating PC begins with the propeller analysis. The importance of the propeller selection is obvious when you consider that it represents 95% of the loss in power going from the prime mover to the water. For most cruisers and destroyers PC varies from 0.60 to 0.70, while the propeller effeciences go from 0.65 to 0.72.

Once the propeller has been found, the other factors affecting PC must be determined. The formula for PC is:

$$PC = \eta_0 \cdot \eta_H \cdot \eta_R$$

η_0 = Open water propeller effeciency

η_H = Hull effeciency

η_R = Relative Rotative effeciency

47
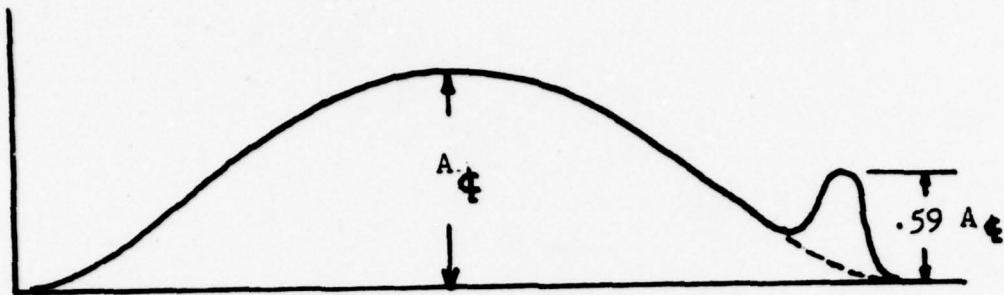
SECTIONAL AREA CURVE
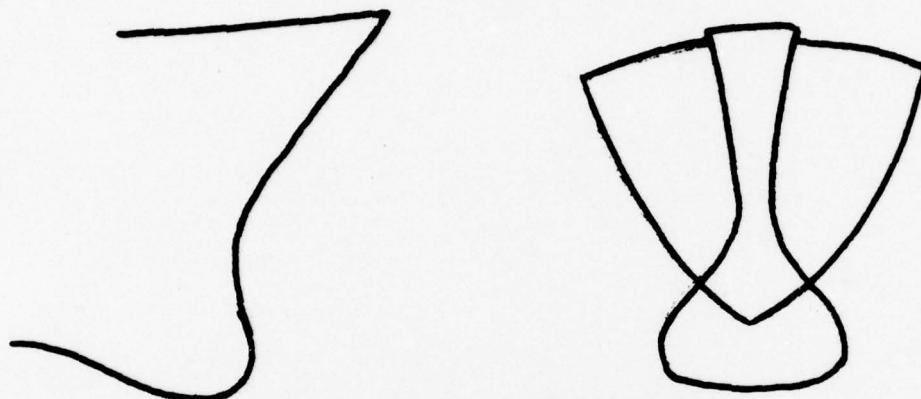
SMALL 350' DESTROYER

WITHOUT SONAR		WITH SONAR	
Δ	2300 tons	Δ	2458 tons
WETTED SURFACE AREA	22,800 ft^3	WETTED SURFACE AREA	24,190 ft^3

V_{kts}	PERCENT CHANGE IN EHP WITH SONAR DOME
12	102%
16	49.6%
20	27.4%
24	4.2%
28	0.0%

FIGURE 2.3   SONAR DOME AFFECTS ON EHP

η_R seldom varies over two percent (0.98 - 1.02) and can therefore be set equal to one for propulsion plant design purposes. η_H, on the other hand, must be addressed in more detail.

$$\eta_H = \frac{1-t}{1-w}$$

$$w = \frac{V-Va}{V} \text{ ; wake fraction}$$

$$t = 1 - \frac{R_T}{T}; \text{ thrust deduction factor}$$

Wake fraction and thrust deduction factors account for the differences in resistance arising from the ship-propeller interactions. Naval destroyers have wake fraction values between -0.02 and +0.02 for ship with struts and between 0.04 and 0.08 for ships with bossings. The value of t, to a first approximation, may be assumed to be equal to w (2).

The Navy design convention in determining horsepower is that when on sea trials a ship must make its sustained speed using only 80% of the installed horsepower. Most designers like to include an extra 5% for a design margin; this means that a good guideline for SHP_I is:

$$SHP_I = 1.25 \ SHP$$

49

2.7 <u>POSSIBLE PROPULSION PLANTS</u> Once SHP_I is established, the plant-types to be analyzed can be selected. Again the design requirements, constraints and philosophy can be measured against the plant characteristics to determine the best plants to investigate. Appendix I serves as a propulsion plant shopping list; it shows the functional relationships and gives some of the advantages and disadvantages.

In actual propulsion plant designs, several variations within a single plant-type will be investigated. For instance, a COGAG plant can have many different combinations of GT's, with different initial costs, availabilities, SFC's, maintenance requirements, etc. One of the variations within each plant type is the most efficient (or design) RPM of the prime mover. In as much as most reduction gears are of standard size, or at least limited in range, these prime mover RPM's will not always match the previously calculated propeller RPM. This of course may necessitate another propeller analysis, with an RPM constraint.

By the end of this phase of the design there will be several plant types ready to be sized. Figure 2.4 illustrates the steps that have been described so far.

2.8 <u>PERFORMANCE AND SIZING</u> Each of the plants selected to analyze must be sized and their performance evaluated. In

DESIGN PHILOSOPHY ⎫
DESIGN REQUIREMENTS ⎬
DESIGN CONSTRAINTS ⎭

.Go-no-Go
 study
.V sus
.V end
.Hull Type
.Tradeoff
 criteria
.etc

EHP/ RESIS

.Prop
 dia
.No. shafts
.etc

PROPELLER CALCULATIONS

.PC
.SHP
.Prop
 RPM
.etc

SELECTION OF PLANTS TO SIZE
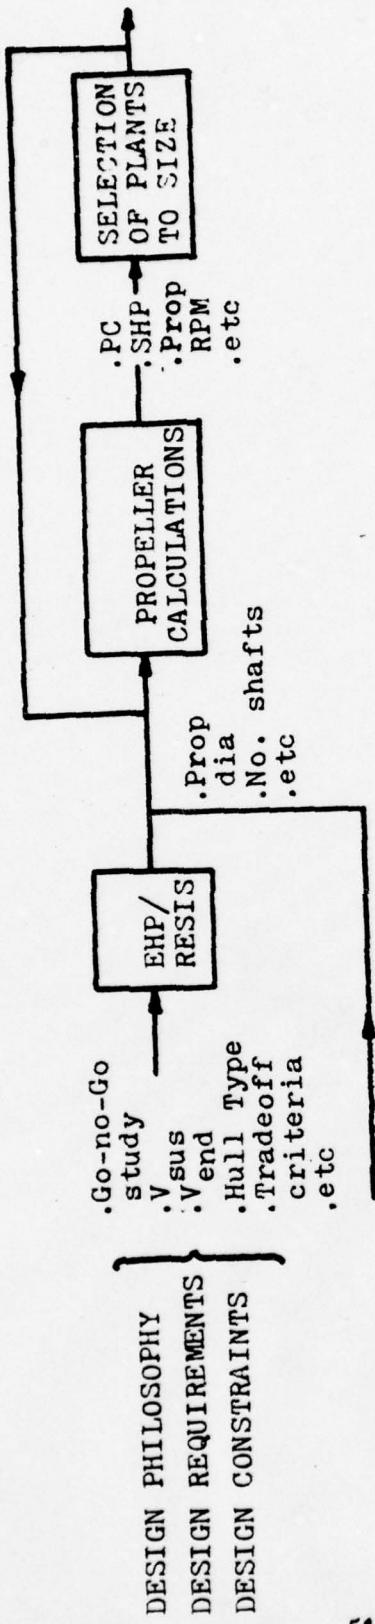
FIGURE 2.4

this context, sizing pertains to weight and volume and performance usually refers to efficiency.

The weight and volume in the first iteration comes from manufacturer's specifications and emperical data. It normally is restricted to a few weight groups, but since these are high impact areas the relative worth of the results is significant. During the sizing of a specific plant it may become evident that it is too big (based on known constraints and requirements); in this case further study is unwarrented. In fact, at any one point in the design process a component or plant type could be dropped from further consideration based on new information. But the designer must be careful not to eliminate a feasible plant (or a piece of gear) because of poor qualities in only one area. In fact weight and volume should be integrated into an overall ship design feedback system to insure the options for trading off propulsion plant requirements with payload, displacement, volume, etc. are available (and vice versa): See Figure 2.5. Appendix IV contains enough sizing information to gain a very good feel for the weight and volume of the standard plant types.

Performance analyses usually consist of calculating SFC vs Power, reliability/availability and other miscellaneous factors that measure system performance. The SFC data, coupled with projected operating profiles, is used
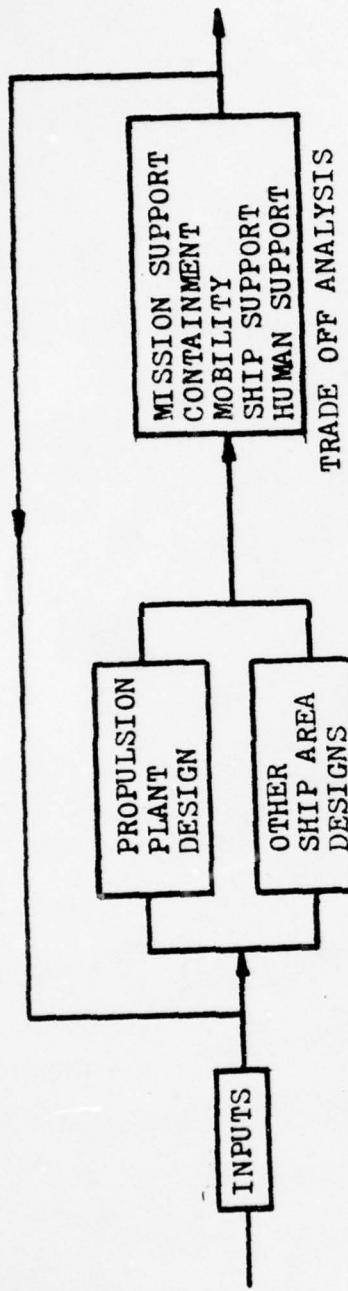
FIGURE 2.5 DESIGN FEEDBACK LOOP

INPUTS

PROPULSION PLANT DESIGN

OTHER SHIP AREA DESIGNS

MISSION SUPPORT
CONTAINMENT
MOBILITY
SHIP SUPPORT
HUMAN SUPPORT

TRADE OFF ANALYSIS

53

to determine the weight and volume that must be allotted for fuel. The reliability/availability values are dependent on the functional relationships, and redundancies of the various components. Therefore, performance analyses are closely linked to machinery arrangements.

2.8.1 <u>PLANT EFFICIENCY</u> One very important factor in a performance evaluation is plant efficiency. Matching prime mover efficiencies to required SHP, waste-heat recovery systems and auxiliary interfacing are the three prime areas in any efficiency analysis.

As a matter of fact, combined plants are an outgrowth of attempts to optimize SFC at both endurance and maximum sustained speeds. Although Section 1.4 and Appendix I discuss the most popular combined plants, almost anything is feasible. The designer has a real opportunity for innovation in this area.

Overall plant efficiency can also be increased by careful integration of propulsion and auxiliary plants. The best way to demonstrate these options is through a schematic. Figure 2.6 shows two different ways to supply several auxiliary loads in a diesel propulsion plant. Each method has its advantages and disadvantages, excluding efficiency, which have to be considered. How to increase
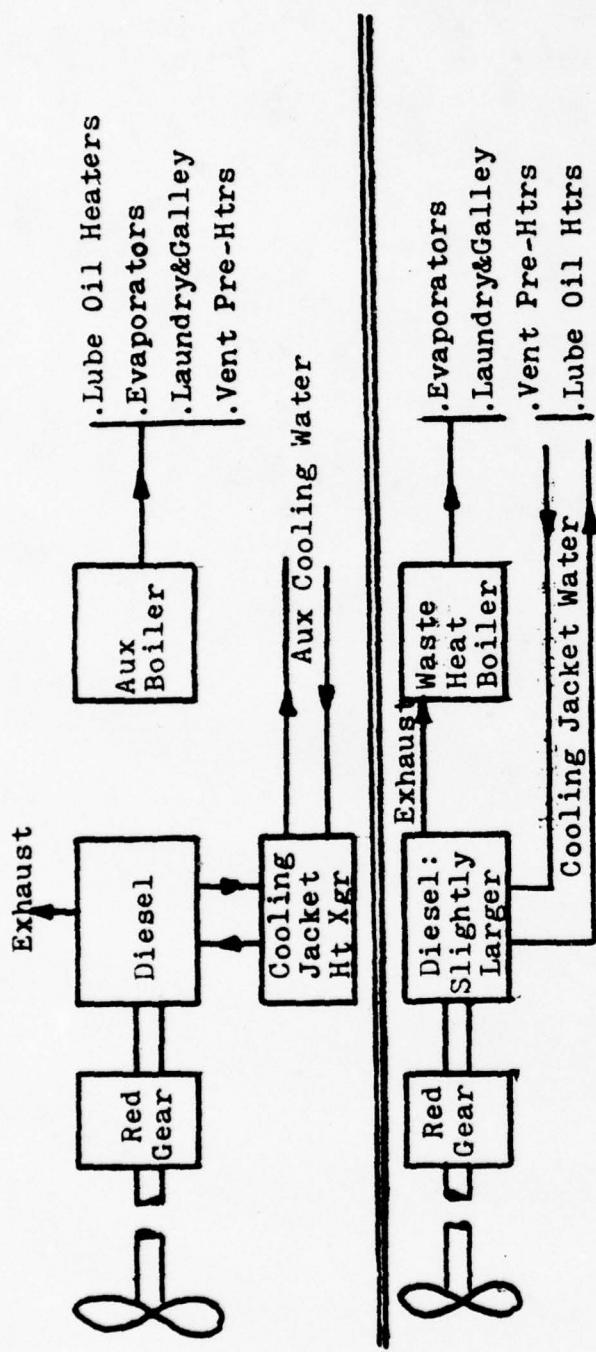
FIGURE 2.6 TWO METHODS OF SUPPLYING AUXILIARY LOADS

55

efficiency through interfacing will be a consequence (in most instances) of the plant selected, rather than a driving force in the selection process; for this reason it will not be addressed further in this thesis.

2.9 <u>SUPPORTING STUDIES</u> Supporting studies in such areas as manning, technical risk, maintenance, control, noise signature, support, etc. are crucial to the candidate selection process. These studies take place in a series-parallel fashion. They are intradependent (in a limited way) and therefore require continual information exchange. Results from these studies are the basis for assigning Figures of Merit (FOM) to the different candidate plants.

As with other areas of propulsion plant design, supporting studies receive from, and contribute to, the overall ship design feedback system. Some of the supporting studies cannot be realistically assessed until the design progresses to actual component selection; this is especially true in manning and maintenance. But these areas can be estimated well enough to permit a plant selection analysis to be made with confidence. One study that is important, in that it is usually a constraining item, is Reliability and Availiability.

2.9.1 __RMA__ A very important aspect of propulsion design is Reliability, Maintainability and Availability (RMA). As in most other areas, RMA characteristics are the basis for tradeoff studies. For example, the increased availability resulting from added component redundancy might be weighed against its cost in dollars, time, maintenance requirements, weight and volume.

Before discussing RMA in any detail, it is necessary to define the terms most often used. Quite often these terms are used interchangeably or out of context, which is confusing as well as wrong. The following definitions have been taken from reference 4.

RELIABILITY, OPERATIONAL: Operational reliability is the reliability demonstrated by an equipment under actual field use. It is the probability that a system will give a specified performance for a given period of time, when used in the manner and for the purpose intended.

MAINTAINABILITY: A characteristic of design and installation which is expressed as the probability that an item will be retained in, or restored to, a specific condition within a given time period, when the maintenance is performed in accordance with prescribed procedures and resources.

AVAILABILITY, INHERENT: The probability that a system, or equipment, when used under stated conditions without consideration for any scheduled or preventative maintenance in an ideal support environment, will operate satisfactorily at any given time: It excludes ready time, preventive maintenance downtime, supply downtime and waiting or administrative downtime.

AVAILABILITY, OPERATIONAL: The probability that
a system or equipment, when used under stated
conditions and in an actual supply environment,
will operate satisfactorily at any given time.

Reliability engineering refers to quantifying reliabil-
ity. The Navy's major input to reliability engineering is
the Maintenance Data Collection System (MDCS). This system,
along with others, helps determine the inputs to a quanti-
tative analysis of RMA by supplying statistical data used
in calculating MTBF, MTTR, MTBM and MDT.

     MTBF - mean time between failure.
     MTTR - mean time to repair.
     MTBM - mean time between maintenance: MTBM = MTBF
            when PMS downtime is considered zero.
     MDT - mean downtime: Includes supply and admin-
            istrative downtime.

System reliability requirements are determined by the
customer prior to design, or negotiated during designer-
customer dialogue in the early stages of design. Either way
the end result is a set of RMA specifications covering
various operating conditions. These specs. will be used
by the designer to help determine optimum system and sub-
system models. An RMA analysis is presented in Appendix VII.

2.10 CANDIDATE PLANT SELECTION ANALYSIS The difficulty
in selecting an optimum propulsion plant, from among the

58

candidate systems, is one of the most critical steps in the design plan. There are many types of selection analyses to choose from when attempting to define an optimum plant. All of these processes are fundamentally the same, regardless of their individual variances. Basically they consist of quantifying the desired propulsion plant characteristics and comparing each plant to these standards. A qualitative evaluation scheme then scores each candidate plant in those areas of primary concern to the owner/designer.

Probably the simplest and most widely used selection method is referred to as a Figure of Merit (FOM) analysis; Outlined in detail in Appendix VI. The FOM approach consists of quantifying the relative importance of desired system characteristics and then assigning a plant rating in each of these areas:

SAMPLE CHARACTERISTIC	FOM	PLANT RATING'S		
		PLANT 1	PLANT 2	PLANT 3
Weight	1.0	1.0*	.90	.94
Volume	.95	.93	1.0*	.80
Cost	.88	.75	1.0*	.98
Tech.Risk	.87	1.0*	.94	.82
Req.Manning	.80	1.0*	.84	.98

* Note that the 'best' plant (s) in a specific catagory is (are) rated 1.0 and the other's are rated relative to the best.

The system with the highest accumulative score, achieved
by multiplying the FOM'S assigned to each characteristic times
the respective plant ratings, can be considered an optimum
choice from among the feasible candidates.

The chief arguement of this approach is the enormous
amount of bias and prejudice that could surface when rating
the characteristics and assigning the FOM's. This is a
legitimate criticism but then it is also one that can be
countered (to a degree) with a few simple guidelines.
Below are listed some ways to reduce the bias.

1. Clearly define the design philosophy, require-
   ments and constraints as they apply to the
   propulsion plant. This should help to elimin-
   ate ambiguities in quantifying the importance
   of system characteristics.

2. Draw from as many different sources as possi-
   ble when assessing FOM's.

3. Assign FOM's early in the design process, before
   prejudices are formed.

2.11 AUXILIARY PLANTS The influence of the auxiliary and
electrical plants on propulsion plant selection is not a
controlling factor, but it can be significant when consider-
ing ship service electrical power generation. Quite obvi-
ously a plant selection strongly influences the choice of
electric power generation. In a steam plant (nuclear or
conventional) it is advantageous to use steam turbines in

60

the electric plant, for several reasons.

1. Economics: Increasing the size of the boiler
   to accomodate a few thousand extra horsepower
   is not that costly (compared to installing an
   entirely new system, such as a GT or diesel).
   Also the required supporting systems already
   exist.

2. Manning: Because propulsion and electric
   power are provided by the same type of mach-
   inery there is no need for additional ratings
   to perform maintenance and watchstanding
   requirements.

Some of the same arguements that suggest steam plants
utilize steam turbines for electric power, apply to gas
turbine and diesel plants. For combined plants (GT's and
diesels) there are tradeoffs to consider; among them are
such things as the lower SFC's of the diesels and weight
and maintenance advantages of the GT's.

For a feasibility study, the auxiliary plant, beyond
ship's service electric power, need not be considered in
propulsion plant design under normal circumstances.

Most synthesis models used in sizing machinery boxes
(such as those in references 5 and 6) take into
account these close relationships between the propulsion
plant and the electric plant. This is reflected in their
emperical formulas relating the installed KW to machinery
box volume.

61

For the above reasons the design methodology outlined in this section uses the installed KW in determining volume for different types of propulsion plants. Figure IV-14 gives KW_I estimates for various displacements, and provides the respective machinery box volume relationships.

2.12 <u>CONCLUSION</u> The propulsion plant design methodology presented in this section is an orderly progression from initial inputs to final outputs. It easily lends itself to a spiral design process, requireing only refined data and greater detail for each iteration. The initial inputs and guidelines evolve from the "overall ship" design requirements, including the design philosophy and constraints. The final outputs are a feasible propulsion plant including arrangements, weights, volumes, operating curves and operational reliabilities.

The entire design process can be viewed as one that addresses three basic questions.

1. How much horsepower is required?

2. Which plants deliver the required horsepower and what are their characteristics? (Weight, Volume, etc.)

3. Of those plants that fulfill the requirements, which one is the optimum?

Determining the horsepower requirements is a straight forward calculation based on initial estimates of displacement and hull form paramaters. Model testing and 'series-analysis' are the two methods used to obtain the required power. The power arrived at through these methods is that necessary to propel the bare hull through the water and thus must be ammended several times prior to arriving at the required installed shaft horsepower.

Once the installed shaft horsepower has been established, selecting the optimum propulsion plant begins. There are usually several alternative plants that can fulfill the requirements, each posessing desireable qualities. The main objective then is two fold: Determine those plants that are reasonable candidates and then conduct a tradeoff analysis of the candidate plants to select the optimum one. The tradeoff analysis is basically a weighted comparison of the different plant's characteristics, and therefore requires sizing and performance information on the candidate plants.

This section outlines the procedure for answering the three design questions. This together with the appendices and example design (Section 3) should enable the reader to conduct his propulsion plant design study. Figure 2.7 shows the entire process.

DESIGN PHILOSOPHY
DESIGN REQUIREMENTS
DESIGN CONSTRAINTS

.Go-no-Go
 study
.V sus
.V end
.Hull Type
.Tradeoff
 criteria
.etc

EHP/
RESIS

.Prop
 dia
.No. shafts
.etc

PROPELLER
CALCULATIONS

.PC
.SHP
.Prop
 RPM
.etc

SELECTION
OF PLANTS
TO SIZE

SIZE
CANDIDATE
PLANTS

.Specific Weight
.Specific Volume
.Initial Aux
 Interfacing
 Considerations
.SFC vs Power
.Manning
.etc

SUPPORTING
STUDIES

.FOM's

SELECTION
ANALYSIS

.BEST
 PLANT

FIGURE 2.7 PROPULSION DESIGN FLOW CHART

64

3. SAMPLE PLANT SELECTION

3.1 <u>INTRODUCTION</u> This section presents a sample propulsion plant feasibility study using the methodology outlined in Section 2; as well as component data from, and methods shown in, the appendicies.

Beginning with a list of typical inputs, the end result is the selection of a 'best' plant from among those chosen to analyze. Comments on the procedure and reasoning behind the analysis, along with references to formulas and data used, are found throughout the example.

3.2 <u>INPUTS</u> The propulsion plant design inputs are drawn from various sources, as stated in Section 2.4. It is assumed that the hull form has been selected and model tests have been conducted. The results of these tests will provide values for barehull resistance, wake fraction, thrust deduction coefficient and propeller diameter limits.

The propulsion philosophy is simply an interpretation of how the overall ship design philosophy will affect propulsion. This is only the first iteration of a feasibility study and does not have all the inputs that might normally be required to complete the propulsion design. There is, however, enough information to permit the designer to choose, and size, the various plants thought to be competative.

INPUTS TO SAMPLE PROBLEM

INPUT	SOURCE

1. V_{sus} .... 30kts   design requirement

2. V_{end} .... 20kts   design requirement

3. Endurance range .... 6000nm   design requirement

4. System reliability, of .95   design constraint
   that at least 50% power is
   available during a 30 day
   operation

5. Approximate size: design requirement,
   Δ .... 7000tons   design constraint,
   L .... 525ft   model tests
   B 55ft
   T 19ft
   C_p .... .60
   C_x .... .80

5. Philosophy: minimize onboard   design requirements,
   maintenance, time to get   design constraints
   underway, technical risk,   and design philos-
   production time and manning   ophy

7. Resistance at V_{sus} 277,257lbs   model tests

8. Resistance at V_{end} 41,795lbs   model tests

9. 1-w .... .98   Assumed values: see
        Section 2.6.3

10. 1-t .... .96

11. Max prop dia. .... 16ft   Hull form

66

3.3 <u>PROPELLER SELECTION</u> The propeller selection analysis
will assume the sample problem requires two shafts. This is
not a bad assumption for a 7000 ton ship required to make
30kts on a 16ft diameter propeller, but more importantly it
adds variety to the prime mover selection process. This
should add more insight into design reasoning.

The propeller calculations that follow are exactly like
those in Appendix II: Using Troost curves from Appendix V.
Since the propeller analysis requires the resistance with
appendages included, the bare hull resistances must be in-
creased by the ratio EHP_{APP}/EHP_{BH} : Section 2.6.2

<u>RESISTANCES WITH APPENDAGES</u>

$(EHP_{APP}/EHP_{BH})_{30kts} = 1.215$: Figure 2.2

$(EHP_{APP}/EHP_{BH})_{20kts} = 1.3$: Figure 2.2

$(R_{APP})_{30} = 1.215(R_{BH})_{30} = 1.215(277,257)$

$(R_{APP})_{30} = 336,867$ lbs

$(R_{APP})_{20} = 1.3(R_{BH})_{20} = 1.3(41,795)$

$(R_{APP})_{20} = 54,334$ lbs

PROPELLER CALCULATION INPUTS

Resistance at V_{sus} (R) .... 336,867 lbs

Resistance at V_{end} (R) .... 54,334 lbs

Propeller diameter (D) .... 16 ft

V_{sus} .... 30 kts

V_{end} .... 20 kts

No. of shafts (N) 2

1-w .... .98

1-t .... .96

PROPELLER CALCULATIONS

$$\frac{K_t}{J^2}_{30} = \frac{R}{N \cdot D^2 \cdot V^2 \cdot \rho \cdot (1-w)^2 \cdot (1-t)} \quad \text{: Equation IIa}$$

$$\frac{K_t}{J^2}_{30} = \frac{336,867}{2 \cdot (16)^2 (30 \times 1.69)^2 (1.99) \cdot (.98)^2 (.96)}$$

$$\frac{K_t}{J^2}_{30} = 0.140$$

$$\frac{K_t}{J^2}_{20} = \frac{R}{N \cdot d^2 \cdot V^2 \cdot \rho \cdot (1-w)^2 \cdot (1-t)}$$

$$\frac{K_t}{J^2}_{20} = \frac{54,334}{2 \cdot (16)^2 (20 \times 1.69)^2 (1.99) \cdot (.98)^2 (.96)}$$

$$\frac{K_t}{J^2}_{20} = 0.051$$

TABLES OF CONSTANT $\dfrac{K}{J^2}$ VALUES

30 kts		20 kts	
K_t	J	K_t	J
.022	0.4	:008	0.4
.035	0.5	.013	0.5
.050	0.6	.018	0.6
.069	0.7	.025	0.7
.090	0.8	.033	0.8
.113	0.9	.041	0.9
.140	1.0	.051	1.0
.169	1.1	.062	1.1
.202	1.2	.073	1.2
.236	1.3	.086	1.3

The next step in the propeller analysis consists of plotting the above relationships on various propeller curves (see Figure II-1) and constructing a table like Table II-2. Table 3.1 is the table for this problem: values of P/D, J, K_t, and η_0 were taken from the plots of K_t/J^2 on the propeller curves and n, A_p, T, q_t, P_o-P_v and % cavitation came from the formulas and graph on Figure II-2.

Based on the propeller selection criteria discussed in Section 2.5.3 (high efficiency and minimum cavitation), Table 3.1 suggests propellers B5-75 and B5-90 are the best choices. The B5-75 will be used with prime movers requiring reversible pitch propellers (the expanded area ratio must be less than about .78 to permit blade reversal), and B5-90 will be used with reversible prime movers.

3.4 UNDERLINE DETERMINE SHP_I Once the propeller efficiencies are

PROP	V	P/D	J	K_t	η_o	n	A_p	$\dfrac{T}{A_p}$	q_t	$\dfrac{T}{A_p q_t}$	$P_o - P_v$	$\dfrac{P_o - P_v}{q_t}$	%cav
B4-55	30	1.40	1.13	.179	.75	165	82.43	14.76	82.39	.18	21.65	.26	15
B4-55	20	1.50	1.38	.097	.76	90	80.42	3.66	27.01	.14	21.65	.80	0
B4-70	30	1.40	1.12	.176	.74	166	104.55	11.64	83.18	.14	21.65	.26	9.5
B4-70	20	1.50	1.40	.100	.76	89	102.54	2.87	26.58	.11	21.65	.81	0
B4-85	30	1.40	1.12	.170	.73	166	126.67	9.61	83.18	.12	21.65	.26	6
B4-85	20	1.55	1.42	.140	.75	87	122.65	2.40	25.74	.09	21.65	.84	0
B4-100	30	1.40	1.11	.170	.71	168	150.80	8.07	84.79	.10	21.65	.26	1.5
B4-100	20	1.60	1.41	.205	.72	88	140.74	2.09	26.16	.08	21.65	.83	0
B5-60	30	1.50	1.24	.210	.75	150	86.46	14.07	71.05	.20	21.65	.30	15
B5-60	20	1.55	1.45	.260	.76	86	86.46	3.40	25.32	.13	21.65	.86	0
B5-75	30	1.45	1.14	.200	.74	163	110.58	11.00	80.82	.14	21.65	.27	8.5
B5-75	20	1.62	1.56	.230	.77	109	104.55	2.82	36.08	.08	21.65	.60	0
B5-90	30	1.45	1.16	.185	.73	161	132.70	9.17	79.26	.12	21.65	.27	4.5
B5-90	20	1.60	1.48	.120	.75	84	126.67	2.32	24.50	.09	21.65	.88	0
B5-105	30	1.58	1.25	.220	.71	149	148.78	8.18	70.33	.12	21.65	.31	4
B5-105	20	1.60	1.50	.110	.73	83	148.78	1.98	24.10	.08	21.65	.90	0
B6-65	30	1.53	1.25	.220	.74	149	94.50	12.88	70.33	.18	21.65	.31	11
B6-65	20	1.60	1.49	.120	.70	83	92.49	3.18	24.10	.13	21.65	.90	0
B6-80	30	1.48	1.20	.200	.74	155	116.61	10.43	74.71	.14	21.65	.29	7.5
B6-80	20	1.66	1.55	.140	.72	80	110.58	2.66	22.93	.12	21.65	.94	0
B6-95	30	1.57	1.27	.230	.73	147	134.71	9.03	68.91	.13	21.65	.31	5
B6-95	20	1.68	1.58	.240	.73	79	130.69	2.25	22.55	.10	21.65	.96	0

TABLE 3.1   PROPELLER CALCULATION RESULTS

* * * *

known, the propulsive coefficient (PC), SHP and SHP_I can be determined.

PROPULSIVE COEFFICIENT

$PC = \eta_o \cdot \eta_{\dot{\jmath}} \eta_{\kappa}$: Section 2.6.3, Table 3.1

$PC(CRP) = (.74)(.98)(1) = .724$

$PC(FP) = (.73)(.98)(1) = .715$

SHAFT HORSEPOWER

$$(SHP) = \frac{(R)(V_{kts})}{(PC)(326)}$$:Appendix II.3, step 1

$$(SHP)_{30} = \frac{(336,867)(30)}{(.724)(326)}$$: CRP

$$(SHP)_{30} = 42,818$$: CRP

$$(SHP)_{30} = \frac{(336,867)(30)}{(.715)(326)}$$: FP

$$(SHP)_{30} = 43,357$$: FP

$$(SHP)_{20} = \frac{(54,334)(20)}{(.77)(326)}$$: CRP

$$(SHP)_{20} = 4,329$$: CRP

$$(SHP)_{20} = \frac{(54,334)(20)}{(.75)(326)}$$: FP

$$(SHP)_{20} = 4,444$$: FP

71

SHAFT HORSEPOWER INSTALLED

$$SHP_I = 1.25 \ SHP \qquad : Section \ 2.6.3$$

$$SHP_I = 1.25(42,818) \qquad : CRP$$

$$SHP_I = 53,522 \qquad : CRP$$

$$SHP_I = 1.25(43,357) \qquad : FP$$

$$SHP_I = 54,196 \qquad : FP$$

For this example assume the required installed horse-power is 54,000 HP.

3.5 SELECTION OF PLANTS TO STUDY The selection of plant types thought to be feasible, given the design inputs and SHP_I , is the next step of the design problem. See Section 2.7. For this problem the following plant types were chosen to analyze.

        1200 PSI   STEAM
        NUCLEAR POWER
        COGOG
        CODOG

The reason behind selecting the above plants is quite simply that none of them is an obvious non-candidate. This approach of studying all those plants that seem feasible minimizes the chances of inadvertantly eliminating a 'best' choice. If there is a poor choice included, the design process should uncover it. Another way to select plants to

72

study, which does not apply in this instance, is based on meeting some specific requirement(s). For instance, if the inputs heavily favor (or severly penalize) a specific plant characteristic, then a plant can be selected (or eliminated) strictly on its advantages (or disadvantages) in that area alone.

Only Diesel,COSAG and COGAS plants (of those listed in Appendix I) are not considered. Elimination of the Diesel plant is based on weight and noise.The other two plants are not really state-of-the-art and would probably not meet the design philosophy of minimizing production time.

3.6 <u>PLANT SIZING</u> The plants selected to study must be sized. This section shows how to find the high impact weights, volumes and component dimensions.

As pointed out in Section 2.11, the electrical and auxiliary plants do not impact the feasibility of a propulsion plant except in the case of steam. For the NUCLEAR and 1200 PSI plants, it is assumed that electric power is supplied by steam turbines. The NUCLEAR plant group 200 weight (W_{200}) in Figure IV-1 indirectly accounts for this fact, since it is based on displacement. The 1200 PSI steam plant will have to have the ship's service generator's horsepower added to the SHP_I when determining W_{200}.

Determination of endurance fuel weight for the steam
plants will be calculated using the specific fuel consumption
(SFC) values for steam turbines (Figure V-1), while the com-
bined plants will use SFC's of the appropriate size diesels.

3.6.1 <u>NUCLEAR PLANT</u> The steam turbine weights in Figure IV-4
do not include the reduction gear, so for the first step in
sizing this plant is to size it. The bull gear diameter will
also be calculated since it is the controlling dimension for
reduction gear volume, and is critical in machinery arrange-
ments.

<u>REDUCTION GEAR SIZING</u>

Assume each shaft has a single input turbine
connected to a conventional double reduction
locked-train reduction gear.

INPUT		SOURCE
Turbine RPM	7800	Typical steam propulsion turbine RPM
K-factors: 1st red	140	Appendix III.1
2nd red	110	Appendix III.1
Propeller speed	161RPM	Table 3.1
SHP$_I$ (per-shaft)	27,000HP	Section 3.4

(1) <u>REDUCTION RATIOS</u>

$$R_2 = \left(\frac{N_{in}}{N_{prop}}\right)^{\frac{1}{2}} + 3 \qquad \text{: Appendix III.4}$$

$$R_2 = \left(\frac{7800}{161}\right)^{\frac{1}{2}} + 3 = 9.96$$

74

$$R_1 = \frac{N_{in}}{N_{out}}$$

$$R_1 = \frac{7800}{(161)(9.96)} = 4.86$$

(2) **GEAR WEIGHT**

$$W_1 = \frac{(12.95)(SHP_{in})(R_1+1)^3}{(N_{in})(2R_1)(k_1)} \qquad : \text{Equation IIIe}$$

$$W_1 = \frac{(12.95)(27,00)(5.86)^3}{(7800)(2)(4.86)(140)}$$

$$W_1 = 6.63 \text{ tons}$$

$$W_2 = \frac{(12.95)(SHP_{in})(R_2+1)^3}{(N_{in})(R_2)(K_2)}$$

$$W_2 = \frac{(12.95)(13,500)(10.96)^3}{(7800/4.86)(9,96)(110)}$$

$$W_2 = 130.9 \text{ tons}$$

(3) **TOTAL WEIGHT OF TWO REDUCTION GEARS**

$$W_{red\ gr} = 2W_2 + 4W_1 = 2(130.9) + 4(6.63)$$

$$W_{red\ gr} = 288.32 \text{ tons}$$

75

(4)   **BULL GEAR (2nd reduction gear) DIAMETER**

$$d_2^3 = \frac{126,050(SHP_{in})(R+1)}{N_{in}(2.25)(R)(K)} \qquad \text{; equation IIId}$$

$$d_2 = \left[\frac{126,050(13,500)(10.96)}{(7800/4.86)(2.25)(9.96)(110)}\right]^{\frac{1}{3}}$$

$$d_2 = 16.72 \text{ in}$$

$$D_2 = R_2 \, d_2 = (16.72)(9.96) = 166.53$$

$$D_2 = 13.88 \text{ ft}$$

FIND GROUP 2 WEIGHTS FROM APPENDIX IV

COMPONENT	WEIGHT	SOURCE
Reduction gears	288.32	Above calculation
Primary plant	1500.00	Figure IV-1
Turbine	139.29	Figure IV-4
Propellers	26.40	Figure IV-7
Shaft	98.00	Figure IV-6
Bearings	18.66	Figure IV-7
Support sys	156.00	Figure IV-9
Cond&A.E.	52.50	Figure IV-5
TOTAL	2279.17 tons	

DETERMINE PROPULSION PLANT VOLUME

FUNCTIONAL AREA	VOLUME	SOURCE
Machinery box	194,115	Figure IV-14
TOTAL	194,115 ft^3	

76

MANNING (WATCHSTANDERS)

WATCHSTATION	NO.	SOURCE
EOOW	1	Manning documents
Electric plant operator	2	
Reactor plant operator	2	
Auxiliary electrician	2	
Leading machinest	2	
Upper levelman	2	
Lower levelman	2	
Throttleman	2	
Reactor controls	2	
Reactor support	2	
Radiation technician	1	
TOTAL	20	

NUCLEAR PLANT SUMMARY

Weight	2279.17 tons
Volume	141,279 ft^3
Manning	20

3.6.2 <u>1200 PSI STEAM PLANT</u> Since the graph of 1200 PSI turbine weight in Figure IV-4 includes reduction gears, no reduction weight calculation is required. As stated in Section 3.6 the HP required for the ship's service turbine generators (SSTG's) is needed to determine W_{200} for this plant.

$$HP_{SSTG's} = \left[\frac{1 \text{ HP}}{.745 \text{ KW}}\right]\left[\frac{KW_I}{\text{Cycle Eff.}}\right]$$

Typical steam cycle effeciency is about .33
and KW_I = 2500 KW (Figure IV-14)

$$HP_{SSTG's} = \left[\frac{1}{.745}\right]\left[\frac{2500}{.33}\right]$$

$$HP_{SSTG's} = 10,169$$

The value to use with Figure IV-1 when determing W_{200}, for the 1200 PSI plant, is $SHP = SHP_I + HP_{SSTG}$

$$SHP = 54,000+10,169 = 64,169 \text{ SHP}$$

$$W_{200} = 174 \text{ tons} \qquad :\text{Figure IV-1}$$

SIZE REDUCTION GEAR (BULL GEAR DIAMETER)

Assume the same turbine RPM as in 3.6.1, but that this is a split turbine with two inputs into a double reduction gear: each input provides 13,500 HP. This means that the horsepower of each second reduction pinion is $13,500(\frac{1}{2})$ HP = 7,250 HP.

$$d_2^3 = \frac{126,050(SHP_{in})(R+1)}{N_{in}(2.25)(R)(K)}.$$

$$d_2 = \left[\frac{(126,050)(7,250)(10.96)}{(7800/4.86)(2.25)(9.96)(110)}\right]^{\frac{1}{3}}$$

$$d_2 = 13.59 \text{ in}$$

$$D_2 = R_2 \, d_2 = (13.59)(9.96) = 135.39 \text{ in}$$

$$D_2 = 11.28 \text{ ft}$$

Comparing this bullgear to the one for the NUCLEAR plant shows the advantage of two power inputs to a double reduction gear.

FIND GROUP 2 WEIGHTS FROM APPENDIX IV

COMPONENT	WEIGHT	SOURCE
Turbine&red gr	233.84	Figure IV-4
Propellers	26.40	Figure IV-7
Shaft	98.00	Figure IV-6
Bearings	18.66	Figure IV-7
Support sys	156.00	Figure IV-9
Cond&A.E.	52.50	Figure IV-5
Boiler (W_{200})	174.00	Figure IV-1
Uptakes	14.00	Figure IV-8
Total	773.4 tons	

CALCULATE ENDURANCE FUEL WEIGHT

The specific fuel consumption of the propulsion turbines is interpreted, from Figure V-1, to be .438lbs/hp-hr and .46 for the SSTG's. Also cruise KW is assumed to be .33 KW_I.

$$W_f \text{ (endurance fuel weight)} = (SHP)_{20}(SFC)\left[\frac{Range}{V_{end}}\right]\left[\frac{1 \text{ ton}}{2240 \text{ lbs}}\right]$$
$$+ (.33)(HP_{SSTG's})(.46)\left[\frac{Range}{V_{end}}\right]\left[\frac{1 \text{ ton}}{2240 \text{ lbs}}\right]$$

$$W_f = (4,444)(.438)\left[\frac{6000}{20}\right]\left[\frac{1}{2240}\right] + (.33)(10,169)(.46)\left[\frac{6000}{20}\right]\left[\frac{1}{2240}\right]$$

$$W_f = 467.43 \text{ tons}$$

MANNING (WATCHSTANDERS)

WATCHSTATIONS	NO.	SOURCE
EOOW	1	Manning documents
ACC console operator	2	
Burnerman	2	Fireroom
Messenger	2	
Upperlevelman	2	

WATCHSTATIONS	NO.	SOURCE
Throttleman	2	
Upperlevelman	2	
Lowerlevelman	2	Engineroom
Messenger	2	
Electrician	1	
TOTAL	18	

DETERMINE PROPULSION PLANT VOLUME

FUNCTIONAL AREA	VOLUME	SOURCE
Machinery box	129,676	Figure IV-14
Uptakes	9,800	Figure IV-10
TOTAL	139,476 ft^3	

1200 PSI PLANT SUMMARY

Weight (including W_f)	1240.83 tons
Volume	139,476 ft^3
Manning	18

3.6.3 COGOG PLANT Because of their poor off-speed SFC's (Section 1.4), gas turbines of different ratings are often combined (Section 1.3.1) to enhance their overall performance. For this sample problem the combination chosen was an LM2500 and a Lycoming TF35. Their respective horsepower ratings of 20,000 and 2,500 match up well with the required sustained and endurance horsepower. The turbine characteristics are taken from Table V-1

Each LM2500 and TF35 combination will drive a controllable reversible pitch propeller through a double reduction-locked train reduction gear. The reduction gear will be sized to accept the maximum rating of the LM2500: 27,000 HP.

REDUCTION GEAR SIZING

INPUT			SOURCE
Turbine RPM		3600	Table V-1
K-factors:	1^{st} red	140	Appendix III.1
	2^{nd} red	110	Appendix III.1
Propeller speed		163RPM	Table 3.1

(1) REDUCTION RATIOS

$$R_2 = \sqrt{\frac{N_{in}}{N_{prop}}} + 3 \qquad \text{; Appendix III.4}$$

$$R_2 = \sqrt{\frac{3600}{163}} + 3 = 7.7$$

$$R_1 = \frac{N_{in}}{N_{out}}$$

$$R_1 = \frac{3600}{(163)(7.7)} = 2.87$$

(2) GEAR WEIGHT

$$W_1 = \frac{(12.95)(SHP_{in})(R_1+1)^3}{(N_{in})(2R_1)(K_1)} \qquad \text{; Equation IIIe}$$

$$W_1 = \frac{(12.95)(27,000)(3.87)^3}{(3600)(5.74)(140)}$$

$$W_1 = 7.01 \text{ tons}$$

81

$$W_2 = \frac{(12.95)(SHP_{in})(R_2+1)^3}{(N_{in})(R_2)(K_2)}$$

$$W_2 = \frac{(12.95)(13,500)(8.7)^3}{(3600/2.87)(7.7)(110)}$$

$$W_2 = 108.36 \text{ tons}$$

(3) TOTAL WEIGHT OF TWO REDUCTION GEARS

$$W_{red\ gr} = 2W_2 + 4W_1 = 2(108.36) + 4(7.01)$$

$$W_{red\ gr} = 244.76$$

(4) BULL GEAR DIAMETER

$$d_2^3 = \frac{126,050(SHP_{IN})(R_2+1)}{N_{in}(2.25)(R_2)(K)} \qquad : \text{ Equation IIId}$$

$$d_2 = \left[\frac{(126,050)(7,250)(8.7)}{(3600/2.87)(2.25)(7.7)(110)}\right]^{\frac{1}{3}}$$

$$d_2 = 14.89 \text{ in}$$

$$D_2 = d_2 R_2 = (14.89)(7.7) = 114.63 \text{ in}$$

$$D_2 = 9.55 \text{ ft}$$

82

FIND GROUP 2 WEIGHTS FROM APPENDIX IV

COMPONENT	WEIGHT	SOURCE
Reduction gears	244.76	Above calculation
Turbines	11.33	Table V-1
Propellers	36.68	Figure IV-7
Shaft	196.00	Figure IV-6
Bearings	34.90	Figure IV-7
Uptakes	20.80	Figure IV-8
Lube oil	13.00	Figure IV-9
TOTAL	557.47 tons	

DETERMINE PROPULSION PLANT VOLUME

FUNCTIONAL AREA	VOLUME	SOURCE
Machinery box	122,007	Figure IV-14
Uptakes	24,000	Figure IV-10
TOTAL	146,007 ft^3	

CALCULATE ENDURANCE FUEL WEIGHT

The SFC of the TF35 operating at SHP_{end} (87% normal rating) is .59 lbs/hp-hr. See Figure V-2. The electric plant requirement is assumed to be supplied by high speed diesels with SFC's of .375 (a good assumption based on Figure V-2).

$$W_f = (SHP)_{20}(SFC)\left[\frac{Range}{V_{end}}\right]\left[\frac{1\ ton}{2240\ lbs}\right]$$

$$+ (.33)(HP_{SSTG's})(.375)\left[\frac{Range}{V_{end}}\right]\left[\frac{1\ ton}{2240\ lbs}\right]$$

$$W_f = (4,329)(.59)\left[\frac{6000}{20}\right]\left[\frac{1}{2240}\right] + (.33)(10,169)(.375)\left[\frac{6000}{20}\right]\left[\frac{1}{2240}\right]$$

$$W_f = 510.61\ tons$$

MANNING (WATCHSTANDERS)

WATCHSTATIONS	NO.	SOURCE
EOOW	1	Manning documents
Propulsion console	1	
Auxiliary console	1	
Electric console	1	
TOTAL	4	

COGOG PLANT SUMMARY

Weight (including W_f)	1068.08 tons
Volume	146,007 ft^3
Manning	4

3.6.4 <u>CODOG PLANT</u> The CODOG plant differs from the COGOG plant only in the choice of prime movers for endurance, and lower, speeds. This plant uses a more fuel efficient diesel for low power requirements. If LCC were included in the selection analysis this would be an even more desireable tradeoff.

For this sample problem the CODOG plant consists of one LM2500 and one Fairbanks Morse 9 cylinder diesel(2700BHP) coupled to each shaft. Since high speed operations will be provided by the LM2500, this plant has the same reduction gear as the COGOG plant.

FIND GROUP 2 WEIGHTS FROM APPENDIX IV

COMPONENT	WEIGHT	SOURCE
Reduction gears	244.76	Section 3.6.3
Turbines	10.36	Table V-1
Diesels	62.68	Figure IV-3
Propellers	36.68	Figure IV-7
Shaft	196.00	Figure IV-6
Bearings	34.90	Figure IV-7
Uptakes	28.50	Figure IV-8
Lube oil	21.00	Figure IV-9
TOTAL	634.88 tons	

CALCULATE ENDURANCE FUEL WEIGHT

The off power SFC of the diesel is taken from Figure V-6. The value .38 lbs/hp-hr represents an 80% load ((4,329/5400). The electric power source is the same as it was for the COGOG plant.

$$W_f = (SHP)_{20}(SFC)\left[\frac{Range}{V_{end}}\right]\left[\frac{1\ ton}{2240\ lbs}\right]$$

$$+ (.33)(HP_{sstg's})(.375)\left[\frac{Range}{V_{end}}\right]\left[\frac{1\ ton}{2240\ lbs}\right]$$

$$W_f = (4,329)(.38)\left[\frac{6000}{20}\right]\left[\frac{1}{2240}\right] + (.33)(10,169)(.375)\left[\frac{6000}{20}\right]\left[\frac{1}{2240}\right]$$

$$W_f = 388.85\ tons$$

This represents a savings of 121.76 tons over the COGOG fuel weight.

MANNING (WATCHSTANDERS)

WATCHSTATIONS	NO.	SOURCE
EOOW	1	Manning documents
Propulsion console	1	
Auxiliary console	1	
Electric console	1	
TOTAL	4	

DETERMINE PROPULSION PLANT VOLUME

FUNCTIONAL AREA	VOLUME	SOURCE
Machinery box	122,007	Figure IV-14
Uptakes	24,000	Figure IV-10
TOTAL	146.007 ft^3	

CODOG PLANT SUMMARY

Weight (including W_f)	1023.75 tons
Volume	146,007 ft^3
Manning	4

3.7 **RELIABILITY** The reliability calculations are like the
sample in Appendix VII, using values of MTTR and MTBF from
Tables VII-1 and VII-2. They are arranged in subsystems
with the combined values calculated last. The design input
for reliability is interpreted as meaning : The reliability
of at least one shaft available (at maximum SHP) during a
30 day operation is 0.95

86

CALCULATE THE RELIABILITY OF TRANSMISSION AND PROPULSOR (R_1)

FIXED PITCH PROPELLER (FP)

$$R_{FP} = 1 - \lambda t = 1 - \frac{720}{200,000} = .9964 \qquad : \text{Equation VIIa}$$

$$R_{SB} = 1 - \lambda t = 1 - \frac{720}{200,000} = .9964$$

$$R_{RG} = 1 - \lambda t = 1 - \frac{720}{200,000} = .9964$$

$$R_{1FP} = R_{FP} \, R_{SB} \, R_{RG} = .9892 \qquad : \text{Equation VIIb}$$

CONTROLLABLE REVERSIBLE PITCH PROPELLER (CRP)

R_{SB} and R_{RG} are the same values as above

$$R_{CRP} = \frac{\mu + \lambda e^{-(\mu + \lambda)t}}{\mu + \lambda} \qquad : \text{Equation VIIc}$$

$$R_{CRP} = \frac{.067 + 4 \times 10^{-5} \exp(-.06704 \cdot 720)}{.06704} = .999$$

$$R_{1CRP} = R_{CRP} \, R_{SB} \, R_{RG} = .9927$$

87

CALCULATE THE RELIABILITY OF REDUCTION GEAR LUBE OIL SYSTEM (R_2)
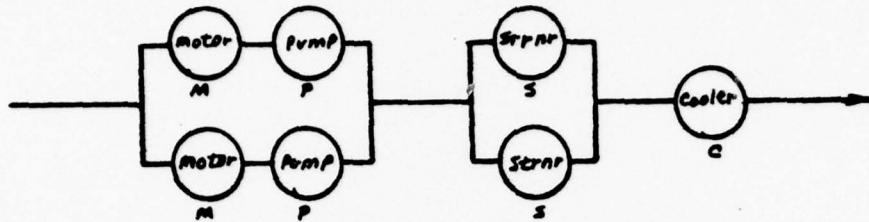
$R_M = .999$	Table VII-1
$R_P = .999$	Table VII-1
$R_S = 1.0$	Table VII-1
$R_C = 1.0$	Table VII-1

$$R_2 = (R_M R_P + R_m R_P - R_m^2 R_p^2)(2R_S - R_S^2)(R_C) \quad : \text{Section VII-2}$$

$$R_2 = 1.0$$

CALCULATE THE RELIABILITY OF THE PRIME MOVERS (R_3)

GAS TURBINE (GT)
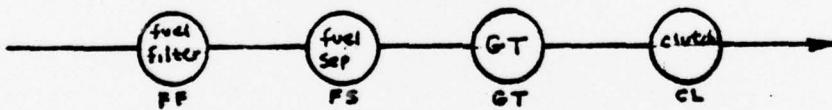
$R_{FF} = 1.0$	Table VII-1
$R_{FS} = 1.0$	Table VII-1
$R_{GT} = .994$	Table VII-1
$R_{CL} = .986$	Table VII-1

$$R_{3GT} = R_{FF} R_{FS} R_{GT} R_{CL} = .98$$

88

STEAM TURBINE (ST)
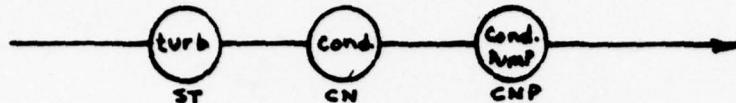
$$R_{ST} = 1.0 \quad \text{Table VII-1}$$
$$R_{CN} = 1.0 \quad \text{Table VII-1}$$
$$R_{CNP} = 1.0 \quad \text{Table VII-1}$$

$$R_{3ST} = R_{ST}\, R_{CN}\, R_{CNP} = 1.0$$

CALCULATE THE RELIABILITY OF ENERGY CONVERTERS FOR THE STEAM PROPULSION PLANTS (R_4)

NUCLEAR (N)

There is no information available on the nuclear primary plant, so it is assumed to be 0.999

$$R_{4N} = .999$$

CONVENTIONAL BOILER SYSTEM (C)
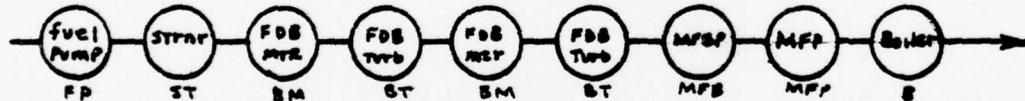
$$R_{FP} = .9956 \quad \text{Table VII-1}$$
$$R_{ST} = 1.0 \quad \text{Table VII-1}$$
$$R_{BM} = .9986 \quad \text{Table VII-1}$$
$$R_{BT} = .9976 \quad \text{Table VII-1}$$
$$R_{MFB} = .9972 \quad \text{Table VII-1}$$
$$R_{MFP} = .9944 \quad \text{Table VII-1}$$
$$R_{B} = .9988 \quad \text{Table VII-1}$$

$$R_{4C} = R_{FP}\, R_{ST}\, R_{BM}\, R_{BT}\, R_{MFB}\, R_{MFP}\, R_{B} = .982$$

89

CALCULATE PLANT RELIABILITIES (R_5)

The plant reliabilities are simply the product of their respective subsystem reliabilities.

NUCLEAR

$$R_N = R_{4N} \, R_{3ST} \, R_2 \, R_{1FP}$$

$$R_N = (.999)(1.0)(1.0)(.9892)$$

$$R_N = .998$$

1200 PSI STEAM

$$R_{1200} = R_{4C} \, R_{3ST} \, R_2 \, R_{1FP}$$

$$R_{1200} = (.982)(1.0)(1.0)(.9892)$$

$$R_{1200} = .971$$

COGOG/CODOG

Since both of these plants have the same machinery configuration at maximum power, their reliabilities will be the same

$$R_{CG/CD} = R_{3GT} \, R_2 \, R_{1CRP}$$

$$R_{CG/CD} = (.98)(1.0)(.9927)$$

$$R_{CG/CD} = .973$$

The result of the reliability analysis demonstrates
that each plant meets the reliability requirement for this
sample problem.

3.8 FIGURE OF MERIT ANALYSIS The key plant characteristics
and their FOM's should represent the areas of primary import-
ance to the customer/user. Relative ranking and value assign-
ments for this sample problem are described below: See
Appendix VI.

3.8.1 FOM ASSIGNMENTS

VOLUME: FOM = 1.0

Plots of ship density vs year commissioned (7) show the
trend towards volume limited ships. The reasons behind
this vary from changes in habitability and maintenance
philosophies to technical advances in all design areas.
In any case it is considered the most important design
characteristic in this problem.

WEIGHT: FOM = 0.95

In any ship design with a limit on full load displacement,
weight is a key factor. Because weight saved in propulsion
is weight available for payload. Also, ship acquisition
cost is proportional to full load displacement,for
similar ships. For these reasons weight is considered
next to volume in importance.

OPERABILITY/MAINTAINABILITY : FOM = 0.90

There has been an increased emphasis placed on this area
in U.S. ship design, and therefore, it must be considered
an important plant characteristic. Operability refers
to ease of operation, complexity of automation required
and the number of men needed to operate the plant.
Maintainability is a measure of the ease with which
maintenance can be performed.

91

MANNING (WATCH STANDERS): FOM = 0.85

Reduction of manning requirements is important in
today's Navy because of its impact on cost and habit-
ability. But since this study looks at only watch-
standers, the FOM assignment is not as high as would be
if total manning were considered.

RESPONSE TIME: FOM = 0.80

Response time is a measure of the ships' ability to get
underway quickly and respond to power changes. This
characteristic becomes increasingly important in an
age of sophisticated weapons.

RADIATED NOISE: FOM = 0.70

Because ASW is normally a mission area for all cruisers
and destroyers, some consideration must be given to the
noise generated by the propulsion plant.

Although there are many other plant characteristics that are
important (cost, damage, vulnerability, ILS, etc.), the ones
listed will serve as a good illustrative guide for a Figure
of Merit analysis.

3.8.2 RELATIVE PLANT RATINGS Each plant must be rated
(relative to each other) in those areas for which an FOM
value has been assigned: Appendix VI.2. For weight, volume
and manning, the rating assigned to the 'best' plant (in
these areas) is 10; and the other plants ratings represent
their relative comparisons to that 'best' plant: Appendix VI.2.

For the remaining areas (operability/maintainability,
response time, radiated noise), each plant is rated using
subjective reasoning as shown below:

VOLUME

PLANT	RATING
1200 Psi	10
Nuclear	9.9
COGOG	9.6
CODOG	9.6

WEIGHT

PLANT	RATING
CODOG	10
COGOG	9.6
1200 Psi	8.3
Nuclear	4.5

MANNING

PLANT	RATING
CODOG	10
COGOG	10
1200 Psi	2.2
Nuclear	2.0

OPERABILITY/MAINTAINABILITY

All of the plants in this problem are capable of auto-
mation. The Nuclear plant has so many paramaters to
monitor that its controls are both complicated and
numerous. On the other extreme the COGOG and CODOG
plants have fewer (and less remote) paramaters to
monitor. The nuclear and combined plants are also
at opposite ends of the spectrum with respect to
the number of support systems. The chief difference
between the COGOG and CODOG plants is the increased
maintenance requirements of the diesel. In the
complexity of the automation and number of support
systems, the 1200 Psi plant is closer to the nuclear
plant than the COGOG or CODOG. For all these reasons
the following ratings have been assigned:

PLANT	RATING
COGOG	10
CODOG	9
1200 Psi	7
Nuclear	6.5

RESPONSE TIME

Gas turbines and diesels coupled to CRP propellers
provide the combined plants with virtual instantaneous
speed changes and start-ups. Although the nuclear plant
can respond to speed changes as fast as the throttle-
man, it does take an hour or two to start-up, even
from hot conditions. Compared to the other plants,
the 1200 Psi plant is slower getting underway (at
least two hours from cold start up) and responding
to speed changes. As a result of the above reasons,
the following ratings were assigned:

PLANT	RATING
COGOG	10
CODOG	10
Nuclear	8
1200 Psi	7

RADIATED NOISE

Of the plants chosen to study the CODOG plant is most
likely to have the worst self-generated noise level.
This is because of the inherent noise level of the
diesel. The other plants should be relatively quiet,
with the nuclear plant being the best. The assigned
ratings are:

PLANT	RATING
Nuclear	10
1200 Psi	9
COGOG	8
CODOG	7

2 OF 2
AD
A075528

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A
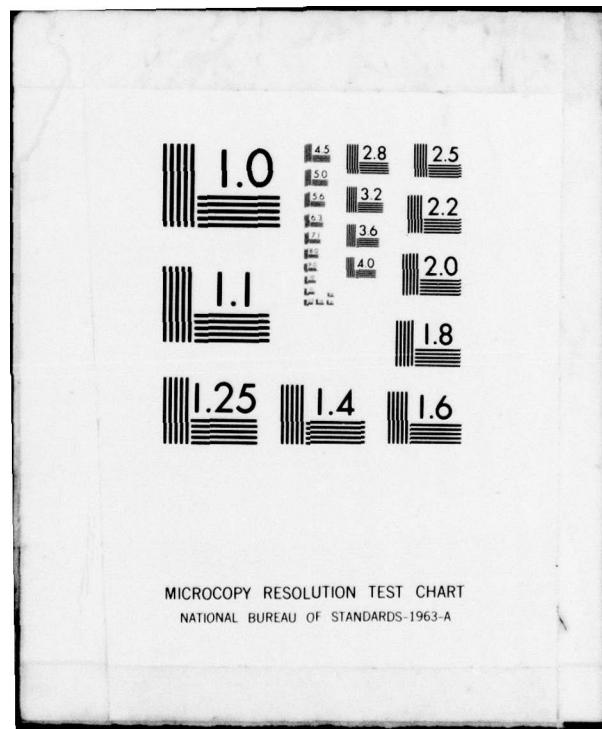
3.8.3 <u>FOM TABLE</u> Once the FOM's and plant ratings have been determined an analysis table such as Table VI-1 can be constructed. The sum of the products of FOM and ships ratings, should show which plant is the 'best'.choice for this sample problem. See Table 3.1.

3.9 <u>CONCLUSION</u> Table 3.1 shows that the COGOG plant is the one best suited for this sample problem: From among the four plants studied. Its slight advantage in operability/maintainability and radiated noise, off-set the weight savings that the more fuel effecient diesel afforded to the CODOG plant. Each of the steam plants fared low because of weight and manning. Had this been a ship with a projected full-load displacement of 3500 tons this weight margin would have been even more of a factor than it was.

This sample problem clearly outlines the initial steps in propulsion plant selection, and shows the importance of weighting (assigning FOM's) selection criteria. For instance if life cycle costs were given a high FOM, the low fuel requirement of the CODOG plant could easily have made it the 'best' choice. The sample also demonstrates that the appendicies of this thesis contain enough information to permit the first iteration of a propulsion plant feasibility study to be made, without consulting further sources.

CHARACTERISTIC	FOM	NUCLEAR		1200 PSI		COGOG		CODOG	
		RATING	PROD	RATING	PROD	RATING	PROD	RATING	PROD
VOLUME	1.00	9.9	9.9	10.0	10.0	9.6	9.6	9.6	9.6
WEIGHT	0.95	4.5	4.28	8.3	7.89	9.6	9.12	10.0	9.5
OP/MAIN	0.90	6.5	5.85	7.0	6.3	10.0	9.0	9.0	8.1
MANNING	0.85	2.0	1.7	2.2	1.87	10.0	8.5	10.0	8.5
RESPONSE	0.80	8.0	6.4	7.0	5.6	10.0	8.0	10.0	8.0
NOISE	0.70	10.0	7.0	9.0	6.3	8.0	5.6	7.0	4.9
TOTAL			35.13		37.96		49.82		48.60
OVERALL RATING			4		3		1		2

TABLE 3.1 PLANT SELECTION ANALYSIS TABLE

96

4. SUMMARY AND RECOMMENDATIONS

4.1 <u>SUMMARY</u> For almost any proposed ship design there exists more than one feasible propulsion plant. Which of these best meets the design objectives depends on the impact they make in several key areas: Such as volume, weight, manning, etc. The design approach outlined in this thesis consists of determining the required shaft horsepower and the different ways to provide it. Once this is accomplished, those plants chosen to investigate are sized and compared. Then their relative worth in the key areas mentioned above are assessed to determine which one is best suited to the initial design requirements.

Transforming design inputs into feasible plants requires an understanding of propeller design, gear design, reliability calculations and selection analysis.along with sizing information and specific machinery data. All of this information is found in the appendices. There are explicit examples of how propellers are selected, reduction gears sized and system/subsystem reliabilities calculated. All significant Group 2 weights, and their associated volumes, are presented along with information on gas turbines, steam turbines and diesels. Finally there is a sample method on propulsion plant selection analysis.

97

This thesis presents a methodology and provides support-- ing data which should enable a basic feasibility study to be made (for state-of-the art propulsion plants) without consul- ting other references.

4.2 RECOMMENDATIONS The next logical step in propulsion design, which this thesis does not address, is an increased level of detail, preliminary investigation into auxiliary operation and propulsion plant concepts for advanced marine vehicles.

The increased level of detail in the propulsion plant will permit more refined estimates of volume, weight, manning, technical feasibility maintenance requirements, etc. Such things as plant control, degree of automation and maintenance philosophy are the type of factors that will govern this process.

If propulsion plant - auxiliary plant interfacing is used to enhance plant efficiency then this too must be analyzed to refine the propulsion plant paramaters.

Accomplishing the above will require the formulation of a sound methodology and the necessary supporting informa- tion. The output of such a scheme is a necessary step in the iteration of a propulsion plant.

APPENDIX I: PROPULSION PLANT SHOPPING GUIDE

I.1 <u>INTRODUCTION</u> APPENDIX I shows the functional relation-
ships and lists the advantages and disadvantages of the stand-
ard cruiser/destroyer propulsion plants. It is intended to
provide a brief introduction/guide to the basic character-
istics of various plants. It can be useful in making the
'go-no-go' decisions referred to in Section 2. or simply
as a reminder of the impacts associated with a particular
plant selection. The advantages and disadvantages are of a
general nature and are not intended to be all inclusive. In fact
circumstances may negate the affects of any one characteristic.

I.2 <u>PROPULSION PLANTS LISTED</u> The following plants are
found in this appendix.

EXHAUST

STEAM

| FUEL | | | |
| AIR | | | |

OIL FIRED BOILER

FEED&COND

STEAM TURB

RED GEAR

ADVANTAGES

1 Extensive service experience
   a Reliability
   b Parts availability
2 Cycle flexibility
3 Ability to burn low grade fuels
4 Reversible prime mover
5 Easy low speed operations
6 Quiet: low vibration levels
7 Low maintenance requirements
8 Most PMS can be done during operation

DISADVANTAGES

1 Low power density (SHP/VOL)
2 High manning requirements
3 Slow start-ups and reaction times
4 Large number of supporting sub-systems

FIGURE I.1 OIL FIRED STEAM PLANT

100

AIR → LP COMP — FUEL — HP TURB — POWER TURB — EXHAUST — RED GEAR

GAS TURBINE
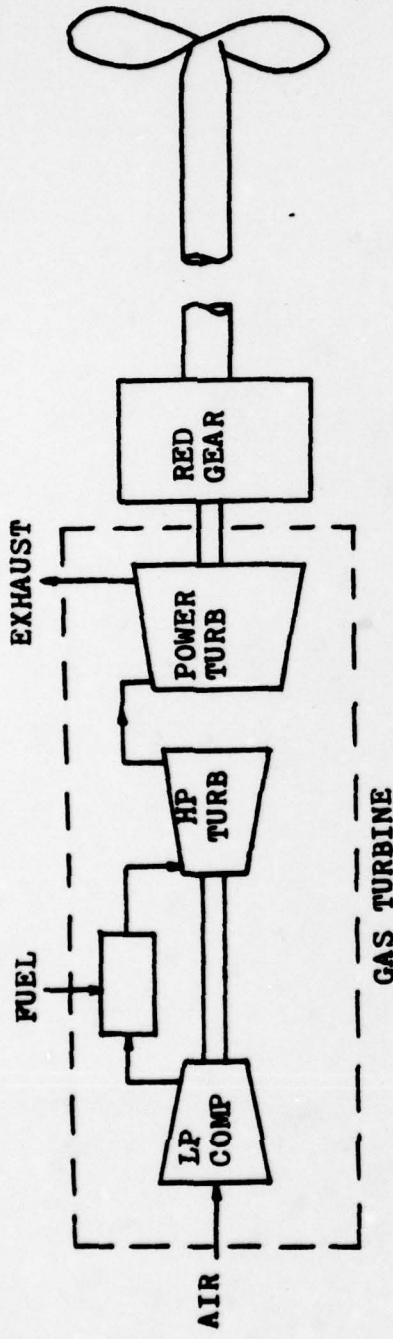
ADVANTAGES

1 High power to weight ratio
2 Compact design
  a Easy installation
  b Ease of removal as a unit
3 Quick response
4 Fast start-up
5 Ease of automation (low manning)
6 Flexible
  a easily adaptable to
     combined cycle use

DISADVANTAGES

1 Poor off-design SFC
2 Unidirectional
  a Need CRP or reversing
     gears
3 Sensitive to varying atmospheric
   conditions and fuel quality
4 High airborne noise signature
  a Requires sound isolation
5 Low power density (SHP/VOL)

FIGURE I.2 GAS TURBINE PLANT

101

EXHAUST

FUEL →
AIR →
DIESEL

RED GEAR
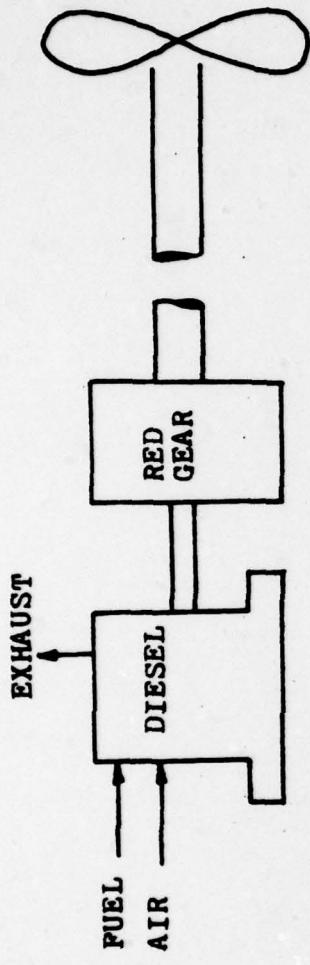
ADVANTAGES

1 Low SFC
2 Ability to burn low grade fuels
3 Low manning levels
4 Easily automated
5 Quick response
6 Fast start-ups

DISADVANTAGES

1 Low power to weight ratio
2 Poor slow speed operations
3 Unidirectional
   a Requires CRP, clutches or stop and restart
4 High noise signature
   a Degrades sonar operations
5 High maintenance requirements
6 High lube oil consumption

FIGURE I.3 DIESEL PLANT

102

NUCLEAR REACTOR | STEAM GEN | STEAM TURB | RED GEAR

PRI WATER | STEAM | FEED&COND

PRIMARY PLANT | SECONDARY PLANT
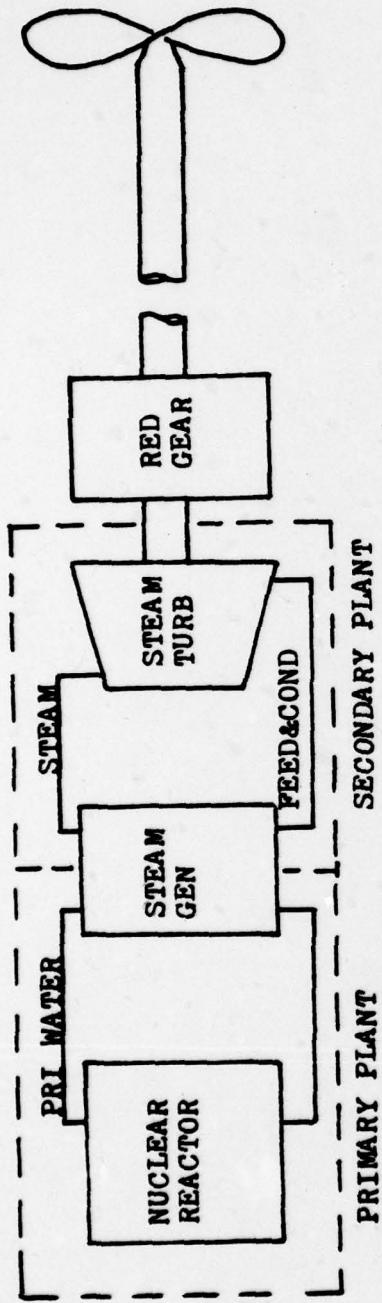
ADVANTAGES

1 Unlimited range and endurance
2 Quick response
3 Low LCC due to long core life
4 Quiet operation
5 No topside impact

DISADVANTAGES

1 Potential health hazard
2 Low power to weight ratio
3 High initial cost
4 Personnel problems
   a Hard to recruit
   b Training expensive

FIGURE I.4 NUCLEAR PLANT

103

```
        GT  GT DIESEL DIESEL

COGAG      CODAG       CODAD
  OR         OR          OR
COGOG      CODOG       CODOD
```
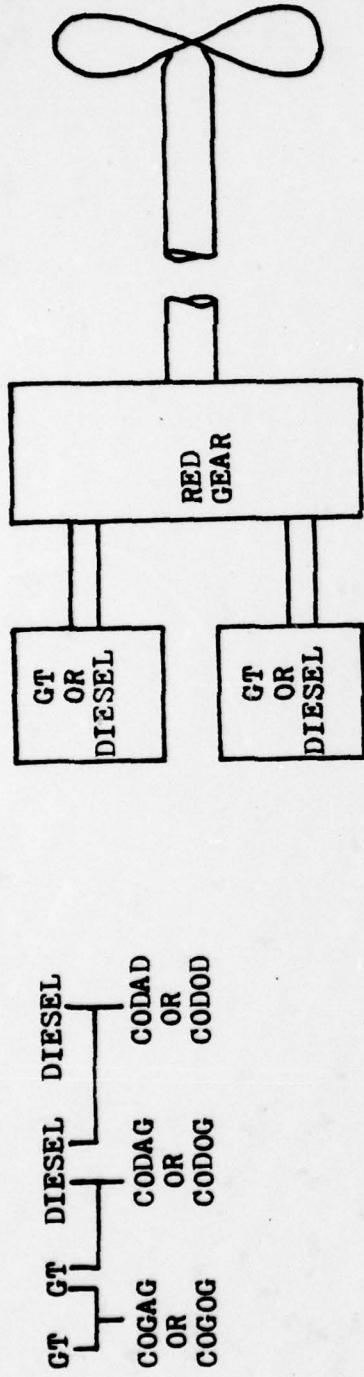
ADVANTAGES

1 Matches required power to power available
2 More efficient use of prime movers
3 Improves SFC at low power requirements
4 Can meet power requirements unattainable by single prime mover

DISADVANTAGES

1 Requires clutching
  a Expensive
  b Technically complicated
2 Automation more difficult
3 Two crew skills required
  a CODAG and CODOG
4 Many of the individual disadvantages are retained; although their impact may be reduced

FIGURE I.5 COMBINED GAS TURBINE AND/OR DIESEL PLANT

104
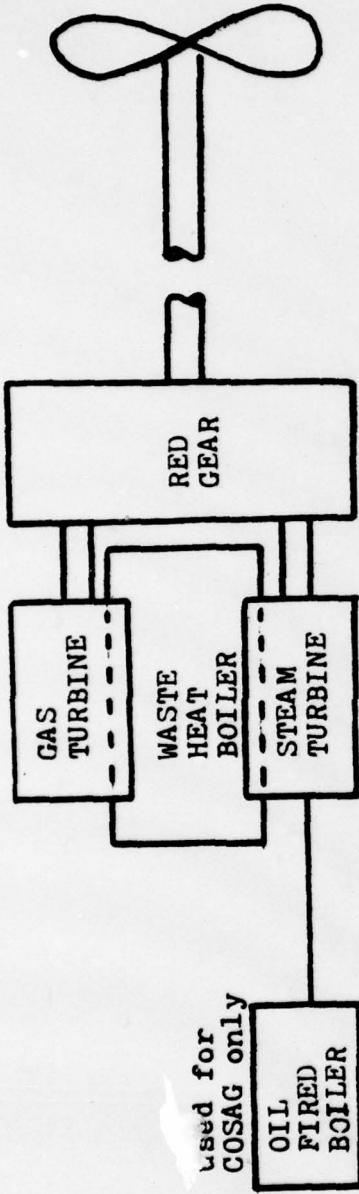
.COGAS - Gas turbine power base plus steam turbine power boost from waste heat recovery

.COSAG - Steam turbine power from oil fired boiler plus gas turbine boost

ADVANTAGE

1. Reduced fuel consumption through increased cycle efficiency

DISADVANTAGES

1. Two crew skills required
2. Complex controls
3. Difficult to arrange

FIGURE I.6 COMBINED GAS TURBINE AND STEAM PLANT

GAS TURBINE

WASTE HEAT BOILER

STEAM TURBINE

RED GEAR

Used for COSAG only

OIL FIRED BOILER

105

APPENDIX II - PROPELLER SELECTION

II.1   LIST OF SYMBOLS

EAR .... Expanded Area Ratio

$J = V_a/n \cdot D$ .... Advance Ratio

$K_t = T/\rho \cdot n^2 \cdot D^4$ .... Thrust Coeffecient

$K_q = Q/\rho \cdot n^2 \cdot D^5$ .... Torque Coeffecient

$\eta_o = (J/2\pi)(K_t/K_q)$ .... Open water propeller effeciency

V .... Ship's Speed

V_a .... Speed Of Advance

$w = (V-V_a)/V$ .... Wake Fraction

T .... Thrust provided by screw

R_t .... Thrust avaible to overcome ship's resistance

$t = 1 - (R_t/T)$ .... Thrust Deduction Factor

D .... Propeller Diameter

n .... Propeller rpm

$\eta_h = (1 - t)/(1 - w)$ .... Hull Effeciency

P .... Propeller Pitch

$\eta_r = \dfrac{\text{open water torque}}{\text{actual torque}}$ ...... Relative Rotative Effeciency

$PC = \eta_o \cdot \eta_h \cdot \eta_r$ .... Propulsive Coeffecient

$\rho = 1.99 \text{ lb-sec}^2/\text{ft}^4$ ..... Density of Salt Water

$\tau_c = T/(A_p\, q_t)$ .... Propeller Thrust Loading

$\sigma = \dfrac{p_0 - p_v}{q_t}$ .... Local Cavitation Number

A_p ...... Projected Area of All Blades, Outside Hub

q_t .... Dynamic Pressure

106

II.2 PROPELLER CALCULATION INPUTS

1. Estimated ship resistance (or EHP_{app}) at various speeds.
   a. These values are determined through model testing or Series Analysis.

2. Maximum allowed propeller diameter (or rpm).
   a. For Navy cruisers and destroyers, the following estimates are good (9).

   $$D = 2.60\ H^{0.629} \qquad \text{one shaft}$$

   $$D = 4.28\ H^{0.428} \qquad \text{two shafts}$$

3. Number of shafts

4. Estimated values for w, t and η_r (see Section 2.6.3)

5. Required speeds (V_{end} and V_{sus})

II.3 EXAMPLE PROPELLER CALCULATION The following example assumes there are to be two shafts and that the propeller diameter is fixed.

INPUTS

Resistance (R)............181,597 lbs (30kts)
                                          37,064 lbs (18kts)

Propeller diameter (D)........10.5 ft

V_{sus}.............................30 kts

V_{end}.............................18 kts

No. of shafts (N).................2

1-w..............................0.94

1-t..............................0.90

h(head of water at prop center)...10 ft

The propeller analysis method used in this Appendix is similar to the one used in Reference 2.

STEP 1 Determine the ratio K_t/J^2 for both V_{end}
and V_{sus} :

IIa $K_t/J^2 = (R)/(N \cdot D^2 \cdot V_{sus}^2 \cdot \rho \cdot (1-w)^2 \cdot (1-t))$

$K_t/J^2 = 0.203$

V-in ft/sec $\div (V_{kts} \cdot 1.69)$

ρ -1.99

If a 'Series' analysis is used to find
EHP for the design speeds, then R can
be estimated as follows:

$R = (EHP \cdot 326)/V_{kts}$

$K_t/J^2 = (R)/(2 \cdot D^2 \cdot V_{end}^2 \cdot \rho \cdot (1-w)^2 \cdot (1-t))$

$K_t/J^2 = 0.115$

$K_t/J^2 = 0.203 \ldots \ldots V_{sus}$
$K_t/J^2 = 0.115 \ldots \ldots V_{end}$

STEP 2   Make a table of possible K_t and J values
for the ratios found in step 1. See
Table II-1

108

	30 kts			18 kts	
J	K_t		J	K_t	
0.1	.002		0.1	.001	
0.2	.008		0.2	.005	
0.3	.018		0.3	.010	
0.4	.032		0.4	.018	
0.5	.051		0.5	.029	
0.6	.073		0.6	.041	
0.7	.099		0.7	.056	
0.8	.130		0.8	.074	
0.9	.164		0.9	.093	
1.0	.203		1.0	.115	
1.1	.246		1.1	.139	
1.2	.293		1.2	.166	

TABLE II-1

STEP 3 Using the values in Table II-1, plot the ratios found in step 1 on a propeller curve like the one in Figure II-1. Where this plot intersects constant P/D lines (points 1,2,3,4 and 5), find the appropriate effeciencies (see red arrows). Connecting these points produces an effeciency curve for that particular propeller operating under those specific inputs. For any point on this curve the thrust, rpm, and effeciency can be determined. As an example take the point of maximum effeciency (point D):

$$\eta_o = 0.7$$

$$J = 1.03$$

$$n = (V_a/J \cdot D) \cdot 60 = (30 \cdot 1.69)/(1.03 \cdot 10.5) \cdot 60$$

$$n = 264.4 \text{ rpm}$$

$$T = K_t \rho \cdot n^2 \cdot D^4 = (.22)(1.99)(4.41)^2(10.5)^4$$

$$T = 103,493 \text{ lbs}$$

To insure proper units V_a must be converted to ft/sec in the expression for n and n must be converted to revs/sec in the expression for T.

109
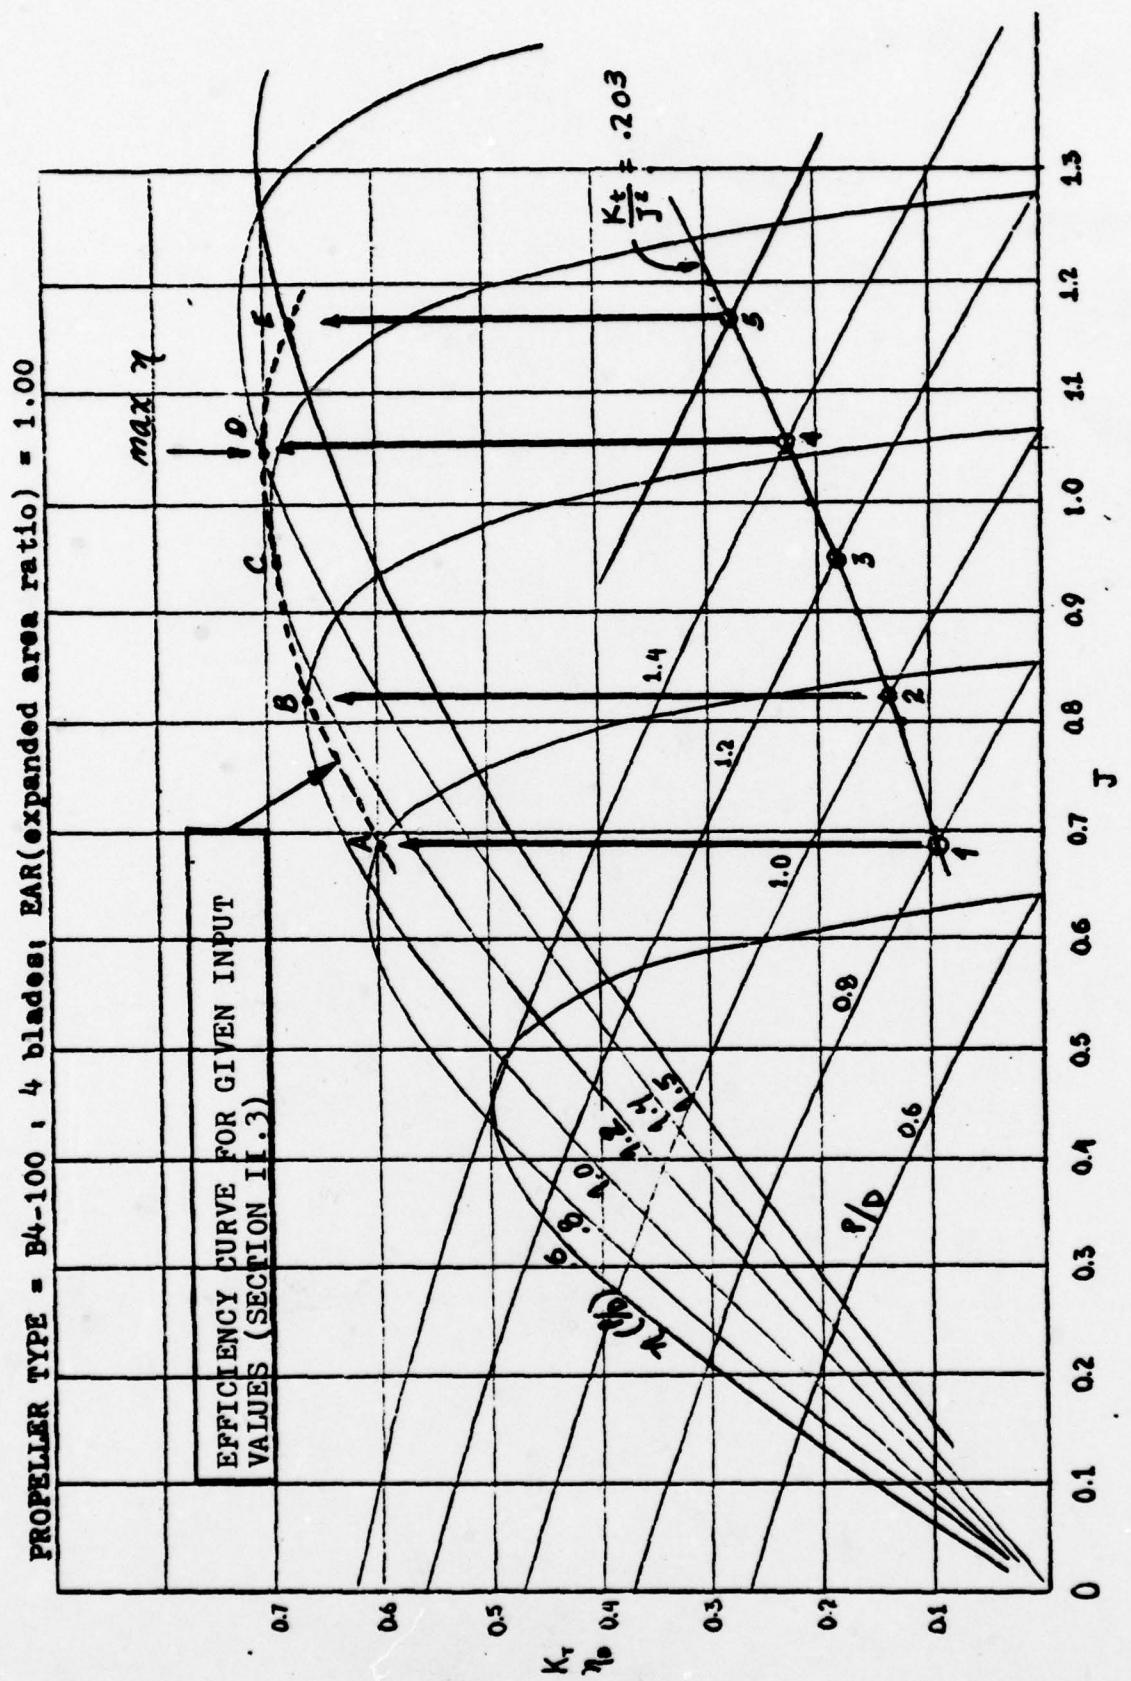
FIGURE II-1 TYPICAL 'TROOST SERIES' PROPELLER CURVE

110

STEP 4   Determine the cavitation for the propeller
          (at both speeds) by plotting the thrust
          loading (τ_c) and the local cavitation num-
          ber (σ) for a selected point on the prop-
          eller curve.* A cavitation diagram, such as
          the one in Figure II-2, is used in making
          the plot.

          As an example, take the propeller curve in
          Figure II-1 and calculate values of τ_c and
          σ using the equations in Figure II-2.

$$A_D = (EAR)\frac{\pi D^2}{4} = 86.546 \qquad \text{:propeller curve}$$

$$V = 30 \text{ kts} \qquad \text{:input}$$

$$V_a = (1-w)V = 28.2 \text{ kts} \qquad \text{:input}$$

$$n = 264.4 \qquad \text{:step 3}$$

$$P/D = 1.4 \qquad \text{:Figure II-1}$$

$$h = 10 \text{ ft} \qquad \text{:input}$$

$$D = 10.5 \text{ ft} \qquad \text{:input}$$

$$t = .10 \qquad \text{:input}$$

$$EHP = \frac{RV}{326} = 16,711 \text{ hp} \qquad \text{:input;}$$
$$\text{step 1}$$

$$q_t = \left(\frac{V_a}{7.12}\right)^2 + \left(\frac{nD}{329}\right)^2 = \left(\frac{28.2}{7.12}\right)^2 + \left(\frac{264.4 \; 10.5}{329}\right)^2$$

$$q_t = 86.89 \text{ psi}$$

$$p_o - p_v = 14.45 + 0.45h = 14.45 + 0.45(10)$$

$$p_o - p_v = 18.95 \text{ psi}$$

* Usually the maximum effeciency or a design
   rpm are the points of most interest.

111

$$A_p = A_D(1.067-0.229(P/D)) =$$

$$A_p = (86.546)(1.067-0.229(1.4))$$

$$A_p = 64.90$$

$$T/A_p = \frac{2.26EHP(1+x)}{(1-t)VA_p} = \frac{2.26(16,711)(1.0004)}{(.9)(30)(64.9)}$$

$$T/A_p = 21.56 \text{ psi}$$

$$\gamma_c = \frac{T}{A_p q_t} = (21.56)(\frac{1}{86.89})$$

$$\gamma_c = .25$$

$$\sigma = \frac{p_o - p_v}{q_t} = \frac{18.95}{86.89}$$

$$\sigma = .22$$

Plotting γ_c and σ on Figure II-2 shows that there will be about 40% back cavitation for this propeller at 30 kts.

step 5 Repeat steps 1 through 5 for different propellers and construct a propeller trade-off table similar to Table II-2. From this table a propeller selection can be made, using the guide lines presented in Section 2.5.2

112

The graph shows curves labeled: "30 % Back cavitation", "20 %", "10 %", "6 %", "2½ %". Y-axis labeled γ_c with values 0.5, 0.4, 0.3, 0.2, 0.1, 0.05. X-axis labeled σ with values 0.1, 0.2, 0.3, 0.4, 0.5, 1.0, 1.5, 2.0.
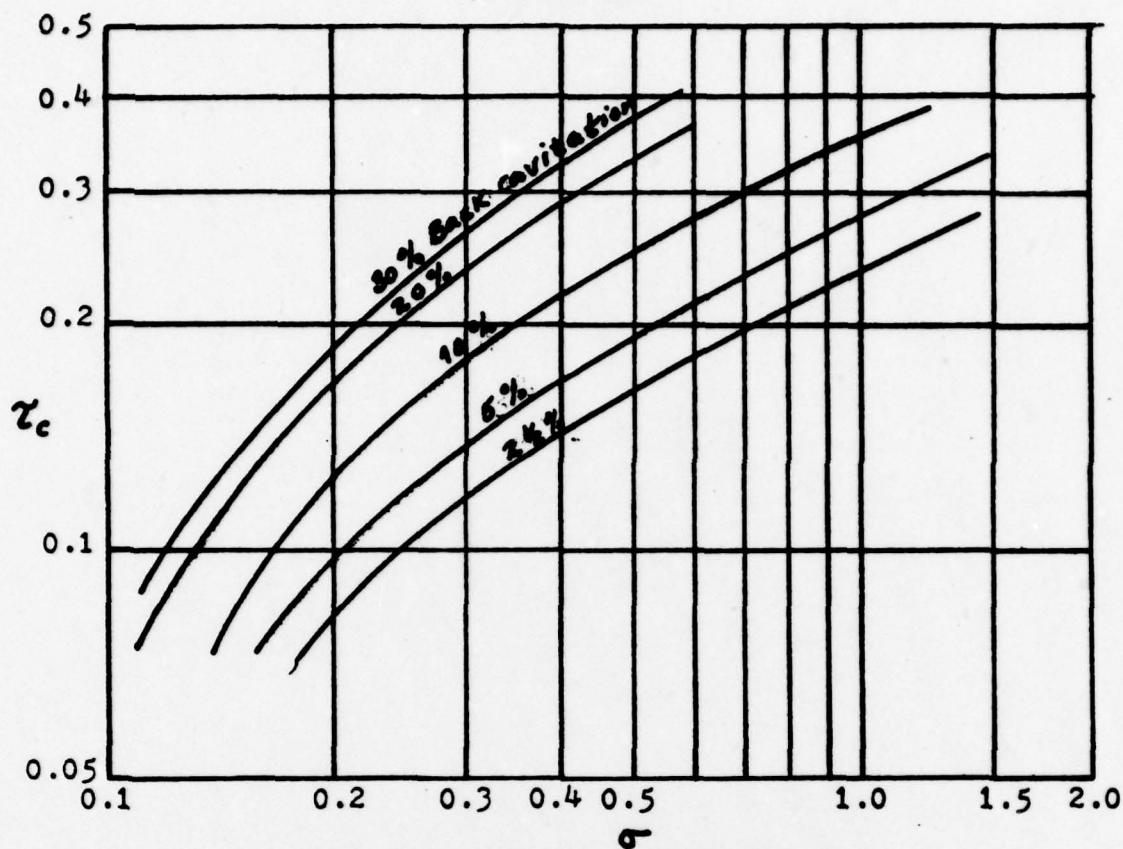
$$\gamma_c = T/(A_p \cdot q_t) \; ; \; \sigma = \frac{p_o - p_v}{q_t}$$

$$T/A_p = (2.26) \frac{EHP \, (1+x)}{(1-t) \cdot V \cdot A_p} \quad ; \quad psi$$

$$q_t = \left(\frac{V_a}{7.12}\right)^2 + \left(\frac{nD}{329}\right)^2 \quad ; \quad psi$$

$$p_o - p_v = 14.45 + 0.45h$$

$$A_p = A_D (1.067 - 0.229(P/D))$$

$1+x$ - model ship correlation factor (usually 1.0004)

$$A_D - \frac{(EAR) \, D^2 \pi}{4}$$

h - head of water at screw centerline
V and V_a are in kts
n is in rpm
D is in ft

FIGURE II-2 SIMPLE CAVITATION DIAGRAM (2)

113

Prop		$\frac{P}{d}$	J	n	q_t	A_p	$\frac{T}{A_p}$	$\frac{T}{A_p}q_t$	σ_{TR}	% cav	η_o
B3-35	30	1.00	.80	340.42	133.72	25.40	27.59	.210	.140	30	.730
B3-35	18	1.40	1.15	142.08	126.21	22.62	2.80	.110	.720	0	.770
B3-50	30	1.12	.85	320.39	120.24	35.15	19.94	.170	.160	30	.710
B3-50	18	1.40	1.14	143.33	26.57	32.32	1.96	.070	.710	0	.760
B3-65	30	1.10	.85	320.39	120.24	45.87	15.27	.130	.160	18	.690
B3-65	18	1.40	1.14	143.33	26.57	42.01	1.51	.060	.710	0	.740
B3-80	30	1.40	1.01	269.64	89.74	51.70	13.55	.150	.210	17	.680
B3-80	18	1.40	1.13	143.97	26.76	51.70	1.22	.050	.710	0	.730
B4-40	30	1.40	1.04	261.87	85.54	25.86	27.09	.320	.220	30	.720
B4-40	18	1.40	1.18	138.48	25.18	15.86	2.54	.100	.750	0	.755
B4-55	30	1.35	1.01	269.40	89.53	36.09	19.41	.217	.211	30	.715
B4-55	18	1.40	1.17	138.98	25.30	35.54	4.02	.158	.749	0	.760
B4-70	30	1.40	1.04	262.88	86.00	45.24	15.48	.180	.220	20	.705
B4-70	18	1.40	1.16	140.77	25.81	45.24	3.16	.122	.734	0	.750
B4-85	30	1.40	1.04	261.62	85.33	54.76	12.79	.150	.222	12	.700
B4-85	18	1.41	1.15	141.38	25.98	55.10	2.59	.099	.729	0	.735
B4-100	30	1.39	1.03	264.40	86.89	64.90	21.56	.250	.220	40	.700
B4-100	18	1.40	1.16	140.77	25.81	63.83	2.24	.086	.734	0	.710
B5-45	30	1.44	1.05	262.90	83.36	29.17	24.01	.028	.227	30	.720
B5-45	18	1.39	1.19	137.22	24.80	29.08	4.91	.197	.764	2	.740
B5-60	30	1.40	1.05	257.90	83.36	38.78	18.06	.216	.227	30	.720
B5-60	18	1.40	1.19	137.22	24.80	38.78	3.68	.148	.764	0	.750
B5-75	30	1.24	.96	283.43	97.42	50.85	13.77	1.41	1.94	17	.715
B5-75	18	1.46	1.22	138.85	25.26	47.58	3.00	1.18	.750	2	.750

TABLE II-2

APPENDIX III - GEAR SIZING

III.1 **'K' FACTOR** One of the most controlling design elements in reduction gear design is the amount of stress at the point of tooth contact: The 'K' factor is a measure of this tooth surface stress (8).

$$\text{IIIa} \quad K = (R+1/R)(W_t/F_e \cdot d) \quad : \quad \frac{\text{loading}}{\text{in face-in dia}}$$

d - pitch dia of pinion (in)
R - gear ratio
W_t - total tangential tooth load (lb)
F_e - effective face width (in)

For Navy ships 'K' factor values vary between 110 and 150. This range insures that stresses do not promote excessive wear and the gear is not over designed for the applied torque

III.2 **GEAR SIZING** The 'K' factor is related to the various design parameters in the following manner (8).

$$\text{IIIb} \quad K = 126,050 \cdot SHP \cdot (R+1)/N_p \cdot d^2 \cdot F_e \cdot R$$

N_p - pinion revolutions per minute

Good design practices, aimed at avoiding excessive deflections, limits the face-width to diameter ratio to the range 2.0-2.25 : Pinion gear (8)

IIIc $2.0 \leqslant F_e/d \leqslant 2.25$

Combining expressions IIIb and IIIc gives an expression useful in determining gear diameter:

IIId $d^3 = 126,050 \cdot SHP \cdot (R+1)/N_p \cdot 2.25 \cdot R \cdot K$

III.3 <u>GEAR WEIGHT</u> Probably more important than gear size is gear weight (assuming reduction gear designers stay within emperical sizing lanes). For preliminary design purposes, an emperical relationship by Dudley gives excellent results (13).

IIIe $W = A(Q/K)^n$

Q - $SHP(R+1)^3/N_p \cdot R^*$: SHP of an input pinion
A - emperical constant
     4.25-planetary gears
     12.95-conventional gears
n - emperical constant: $.8 \leqslant n \leqslant 1.0$

$*$ - For double reduction gears:
     $R_1 = (2R_1)$ and $R_2 = R_2$

116

III.4 <u>EXAMPLE GEAR CALCULATION</u> The gear diameter and weight
are the two most critical design characteristics (with respect
to reduction gears), and can be calculated quite easily using
equations IIId and IIIe. Assume, for instance, we are sizing a
single input, double reduction, locked-train reduction gear .
This gear will be used to couple a gas turbine to a CRP prop-
eller, designed for 150 rpm at maximum speed.

                            INPUTS

            Prime Mover   LM2500
            Horsepower   22,000
            RPM (Prime Mover)   3,600
            'K' factor (high speed pinion)   140
            'K' factor (low speed pinion)   110
            Propeller RPM   150

        STEP 1   Determine R_1 and R_2 (first and second
                 reduction ratios). A useful approxim-
                 ation for R_2 is:

            $$R_2 = \sqrt{N_{in}/N_{Prop}} - 1$$; conventional gear
                                                        without locked train

            $$R_2 = \sqrt{N_{in}/N_{Prop}} + 3$$; locked train

        For this example then:

            $$R_2 = \sqrt{3600/150} + 3 = 7.9$$

                            117

$$R_1 = 3600/150 \cdot 7.9 = 3.04$$

STEP 2 Calculate the diameter of the first reduction
pinion using equation IIId.

$$d_1^3 = 126,050 \cdot 11,000 \overset{*}{\cdot} 4.04/3600 \cdot 2.25 \cdot 3.04 \cdot 140$$

$$d_1 = 11.7 \text{ in}$$

* For a locked train, the input SHP gets split
between the two first reduction pinions

STEP 3 Compute the diameter of the first reduction
gear.

$$D_1 = R_1 \cdot d_1$$

$$D_1 = 35.56 \text{ in}$$

Step 4 Calculate the diameter of the second reduction
pinion.

$$d_2^3 = 126,050 \cdot 11,000 \cdot 8.9/(150 \cdot 7.9) \, 2.25 \cdot 7.9 \cdot 110$$

$$d_2 = 10.78 \text{ in}$$

118

STEP 5 Calculate the diameter of the second reduction
         gear (bull gear).

$$D_2 = R_2 \cdot d_2$$

$$D_2 = 85.19 \text{ in } (7.10 \text{ ft})$$

STEP 6 Calculate the gear weights.; IIIe

$$W_1 = 12.95(22,000)(4.04)^3/3600(2 \times 3.04)(140)$$

$W_1 = 6.13$ tons   x 2 (1st reduction gears) = 12.26

$$W_2 = 12.95\frac{(22,000)}{2}(8.9)^3/(150 \cdot 7.9)(7.9)(110)$$

$W_2 = 97.5$ tons

$W_{total} = 109.76$ tons

With these gear diameters and weights the reduction gear
can be sized easily.These values represent the most restricting
weights and dimensions of the reduction gear assembly. Gear
width, casing weight and other aspects of reduction gear sizing
can also be estimated using information found in Reference (8).

APPENDIX IV - PROPULSION PLANT SIZING CURVES

IV.1 <u>SIZING CURVES</u> The figures in this appendix allow various Group 2 weights and volumes to be determined, provided the installed shaft horsepower is known . For KW_I an estimate of displacement is necessary. References 1, 3, 5, 7, 9 and 10 were used in deriving the figures.

IV.2 <u>LIST OF FIGURES</u>

FIGURE IV-1 Weight Group 200 (energy converters) vs Horsepower

121

FIGURE IV-2 Gas Turbines: Specific Weight vs Horsepower
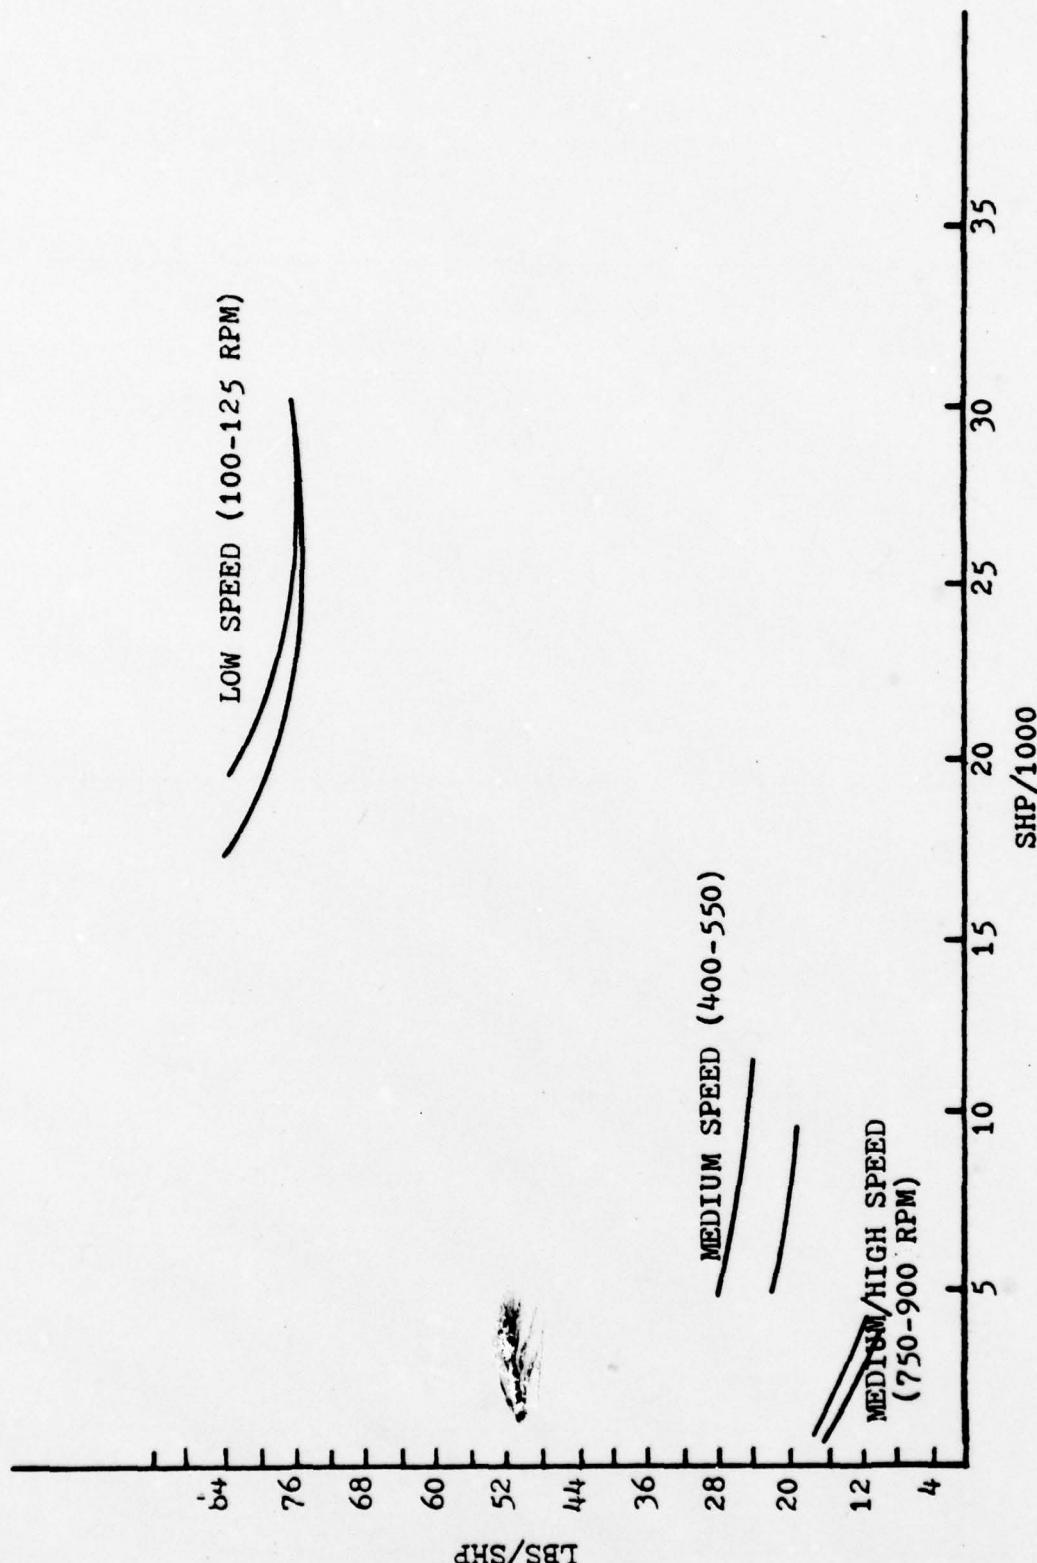
FIGURE IV-3 Diesel Engines: Specific Weight vs Horsepower

LOW SPEED (100-125 RPM)

MEDIUM SPEED (400-550)

MEDIUM/HIGH SPEED
(750-900 RPM)

SHP/1000

LBS/SHP

123
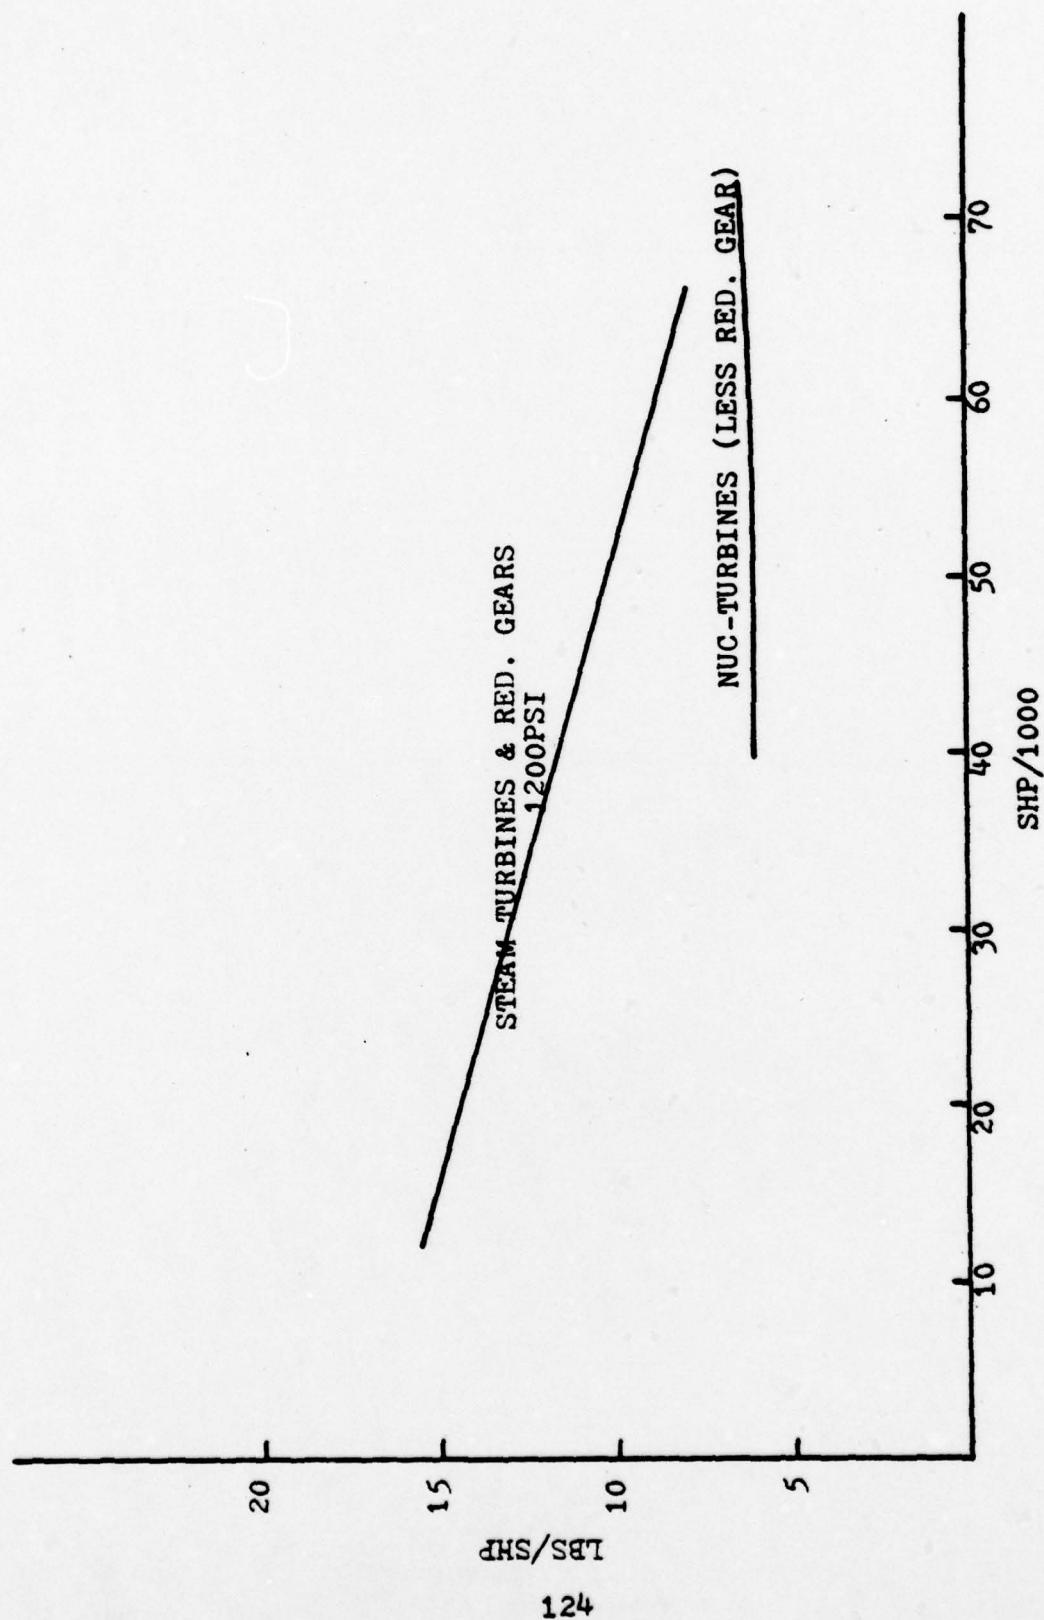
FIGURE IV-4 Steam Turbines: Specific Weight vs Horsepower

124
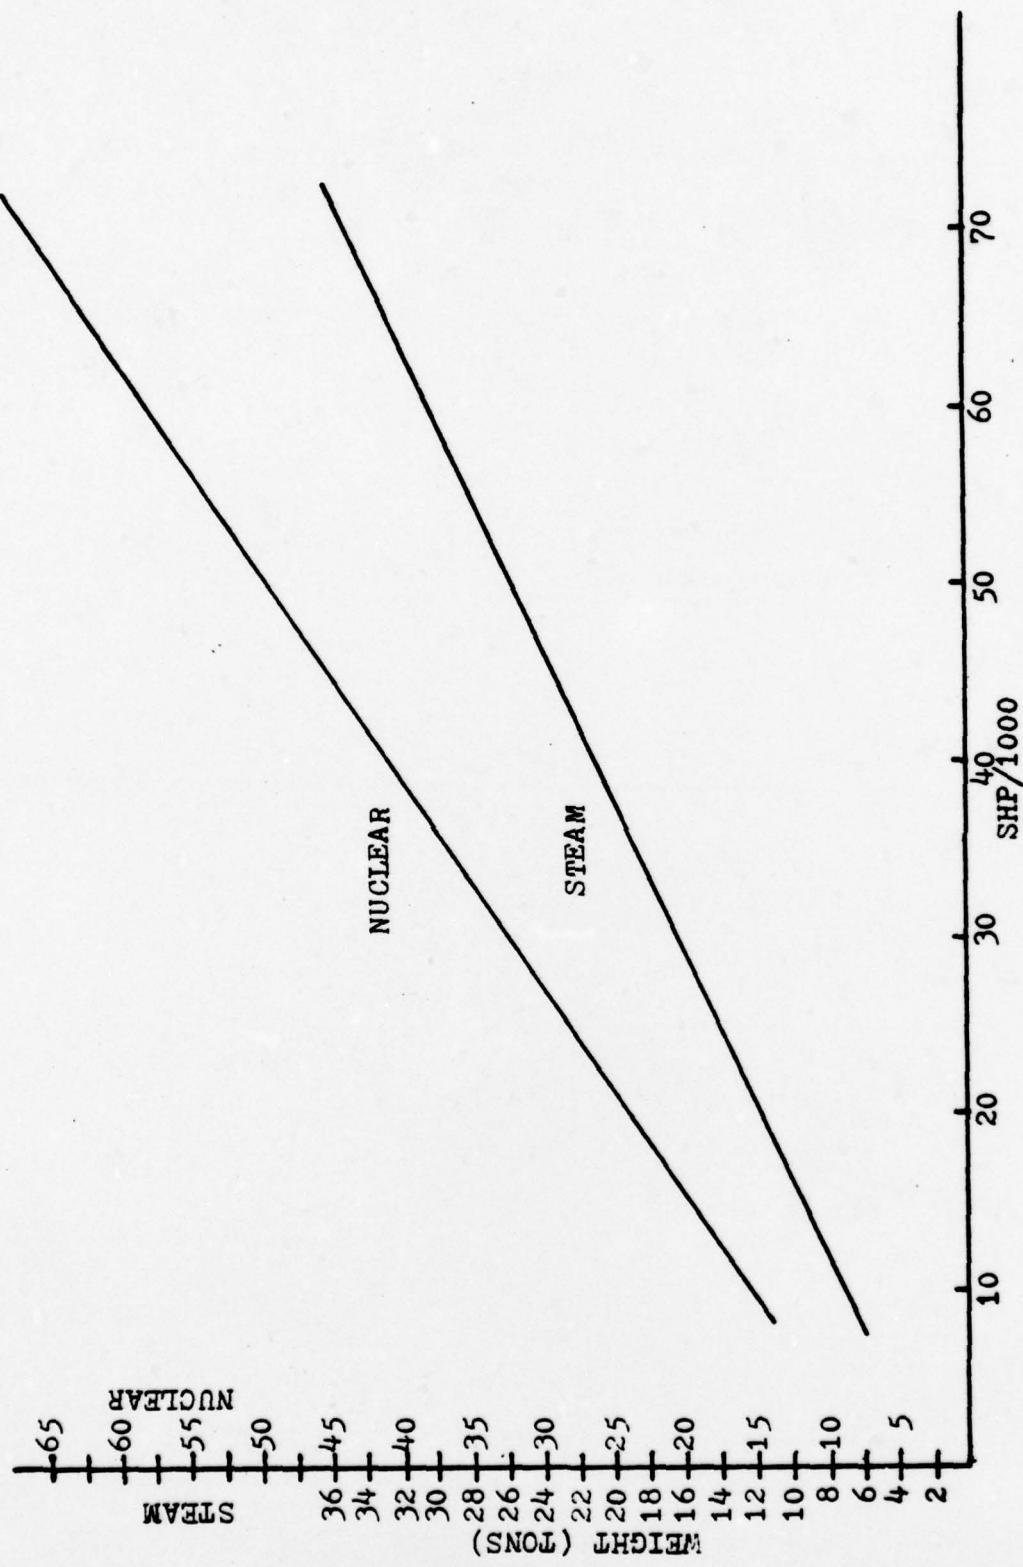
FIGURE IV-5 Main Condenser&Air Ejectors Weight vs Horsepower

125

SHAFT WEIGHT CALCULATIONS FOR SPEEDS OF 30 KTS AND DIAMETERS OF 8-15 FEET

STEAM & NUCLEAR PLANTS

1. HOLLOW SHAFT, FIXED PITCH, 1 SHAFT
   $W_{sh} = M \times LBP$

2. HOLLOW SHAFT, FIXED PITCH, 2 SHAFTS
   $W_{sh} = M \times LBP \times 0.66$

3. HOLLOW SHAFT, CRP, 1 SHAFT
   $W_{sh} = M \times LBP \times 1.50$

4. HOLLOW SHAFT, CRP, 2 SHAFTS
   $W_{sh} = M \times LBP \times 1.33$

FOR GT, DIESEL, AND COGAS PLANTS :
   $W_{sh} = W_{sh}$(SAME AS ABOVE) $\times 0.56$

M (MULTIPLIER FOR W_{sh} CALCULATIONS)

SHP'/1000
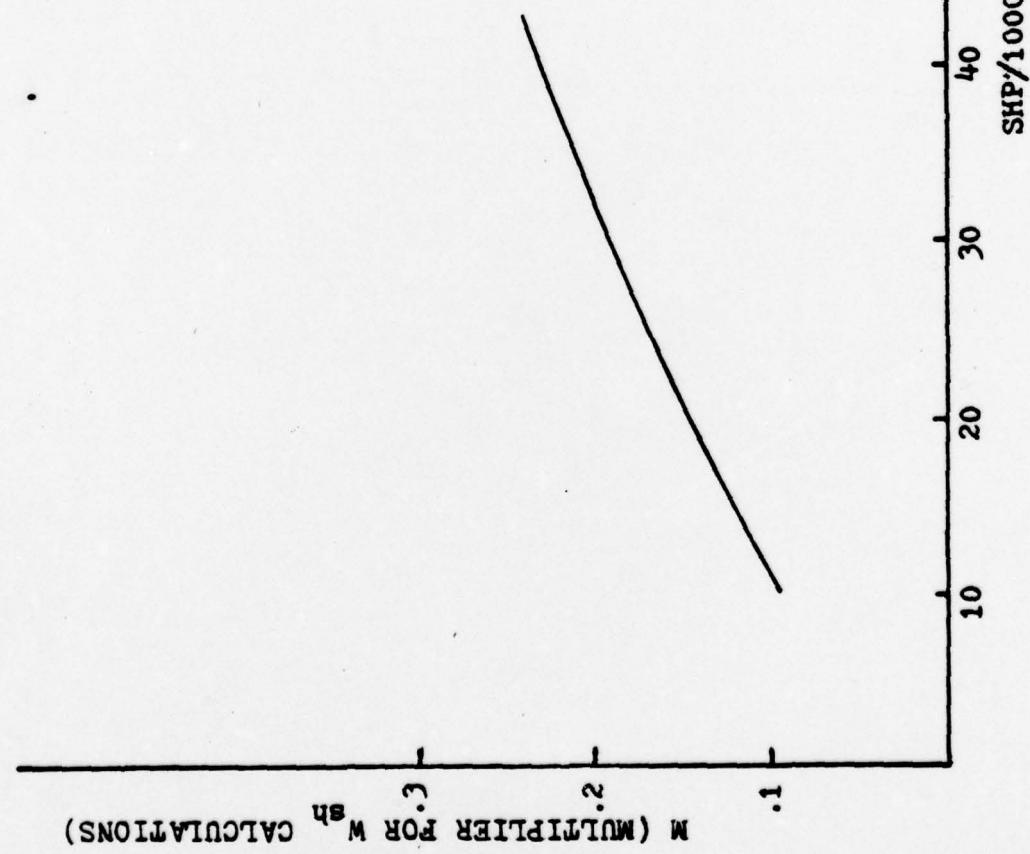
FIGURE IV-6 Shaft Weight vs Horsepower

126

CONTROLABLE PITCH

FIXED PITCH

W_{BRG} (bearing weight) = $.15(W_{sh}+W_{prop})$

DIAMETER OF PROPELLER (FT)

PROPELLER WEIGHT (TONS)
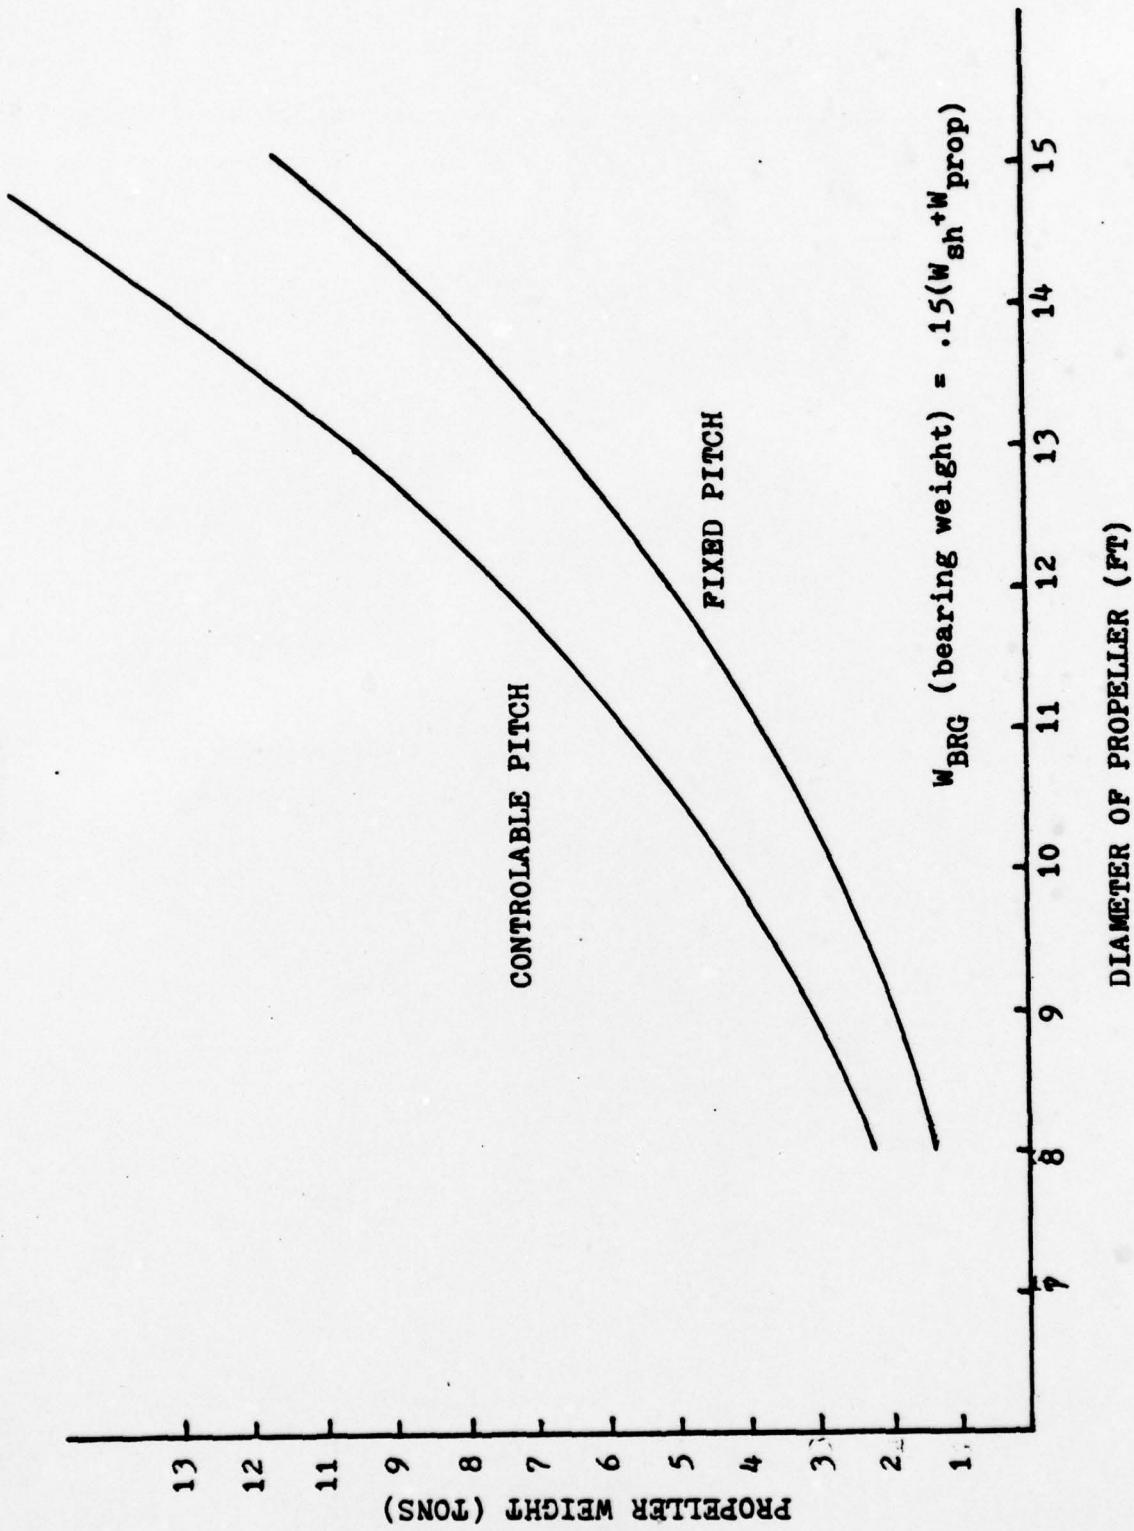
FIGURE IV-7 Propeller Weight vs Propeller Diameter, and Weight of Shaft Bearings
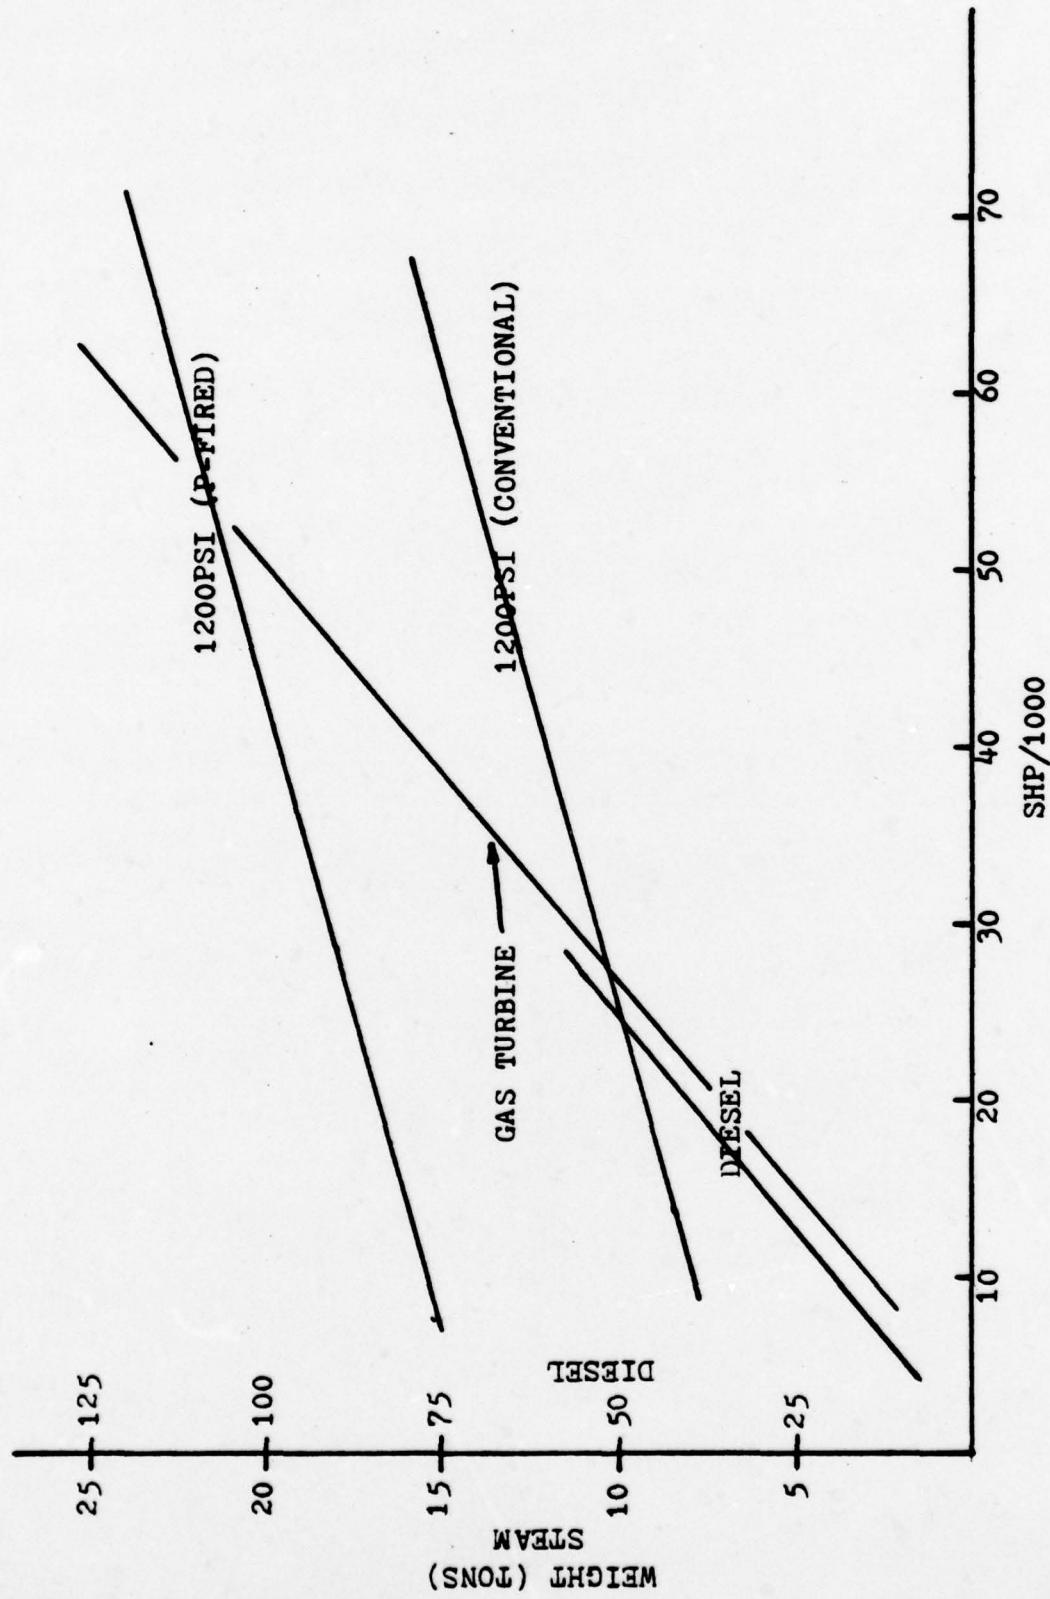
FIGURE IV-8 Weight of Uptakes vs Horsepower

128
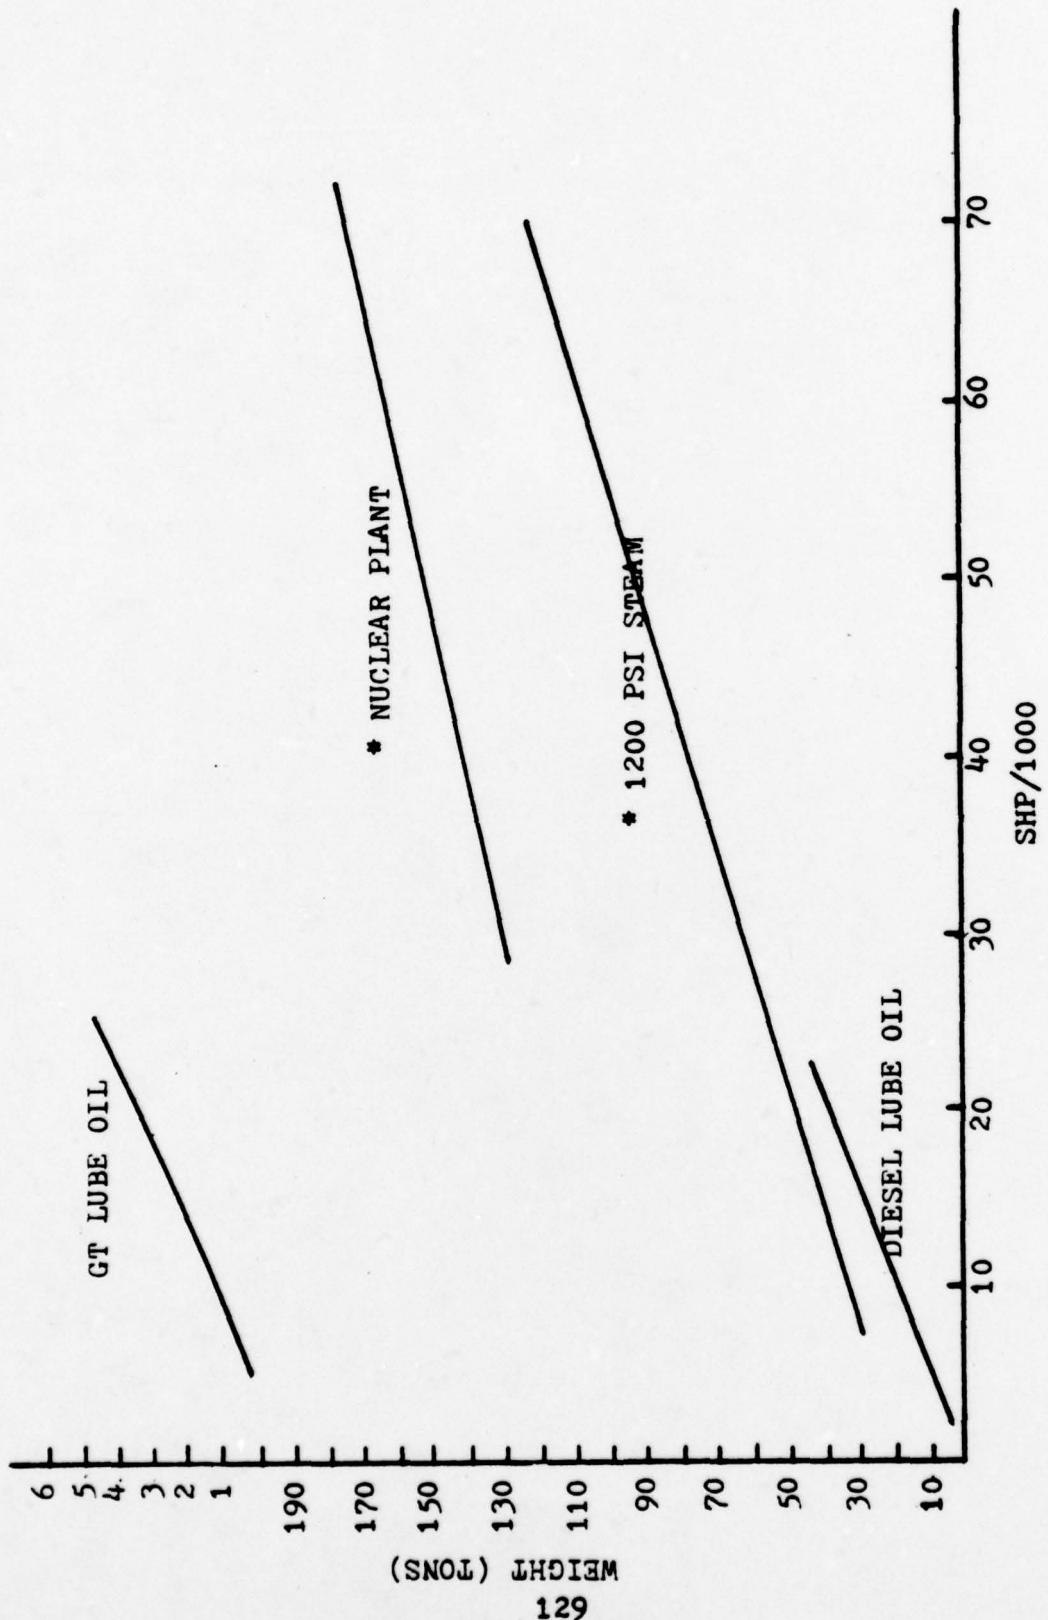
FIGURE IV-9 *Steam, Feed&Condensate, Circ Water and Lube Oil vs Horsepower

129
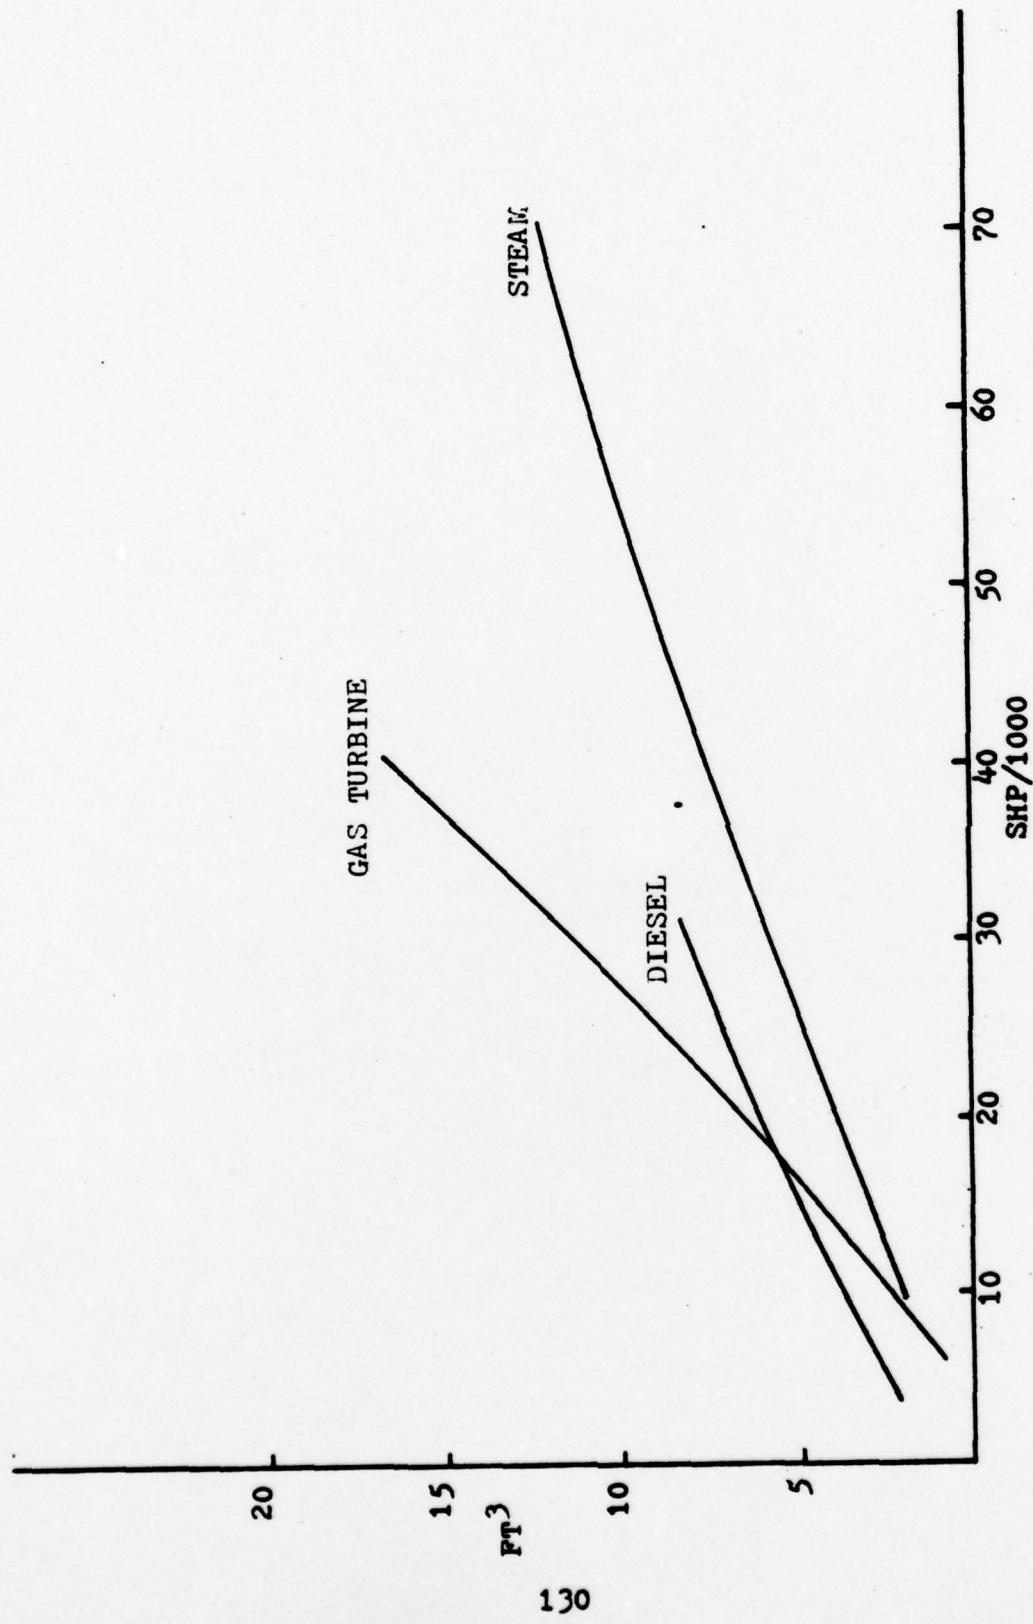
FIGURE IV-10 Uptakes Volume vs Horsepower

130
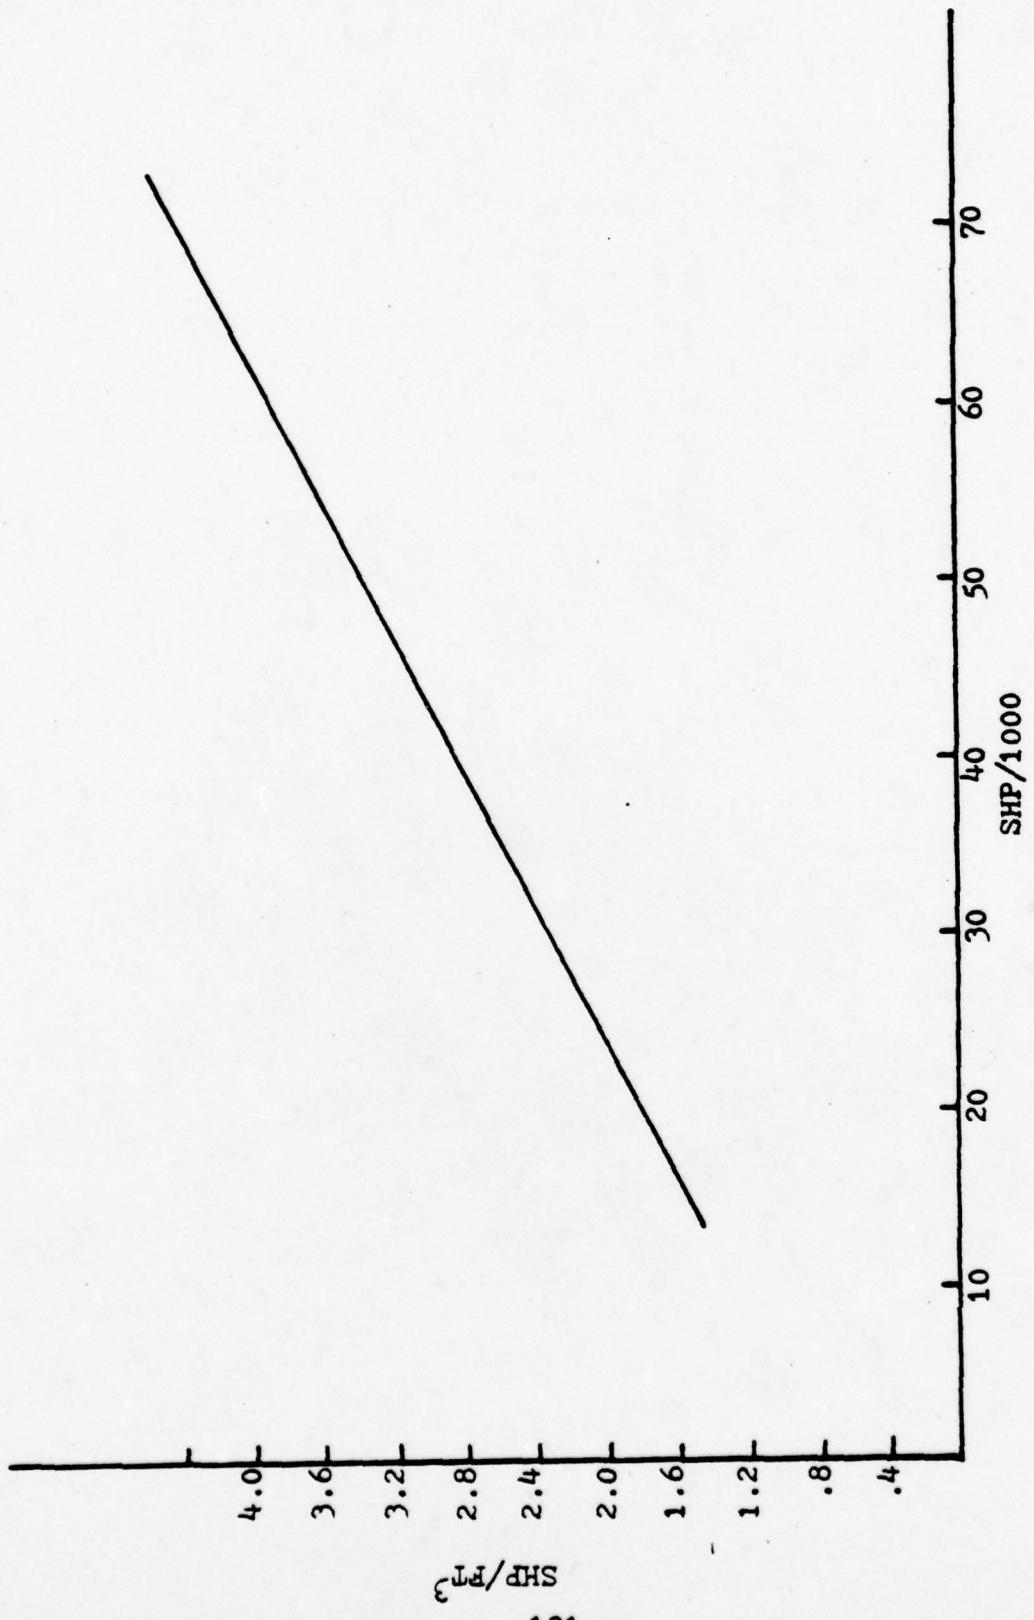
FIGURE IV-11 Steam Turbines (including reduction gears):
Power Density vs Horsepower

131
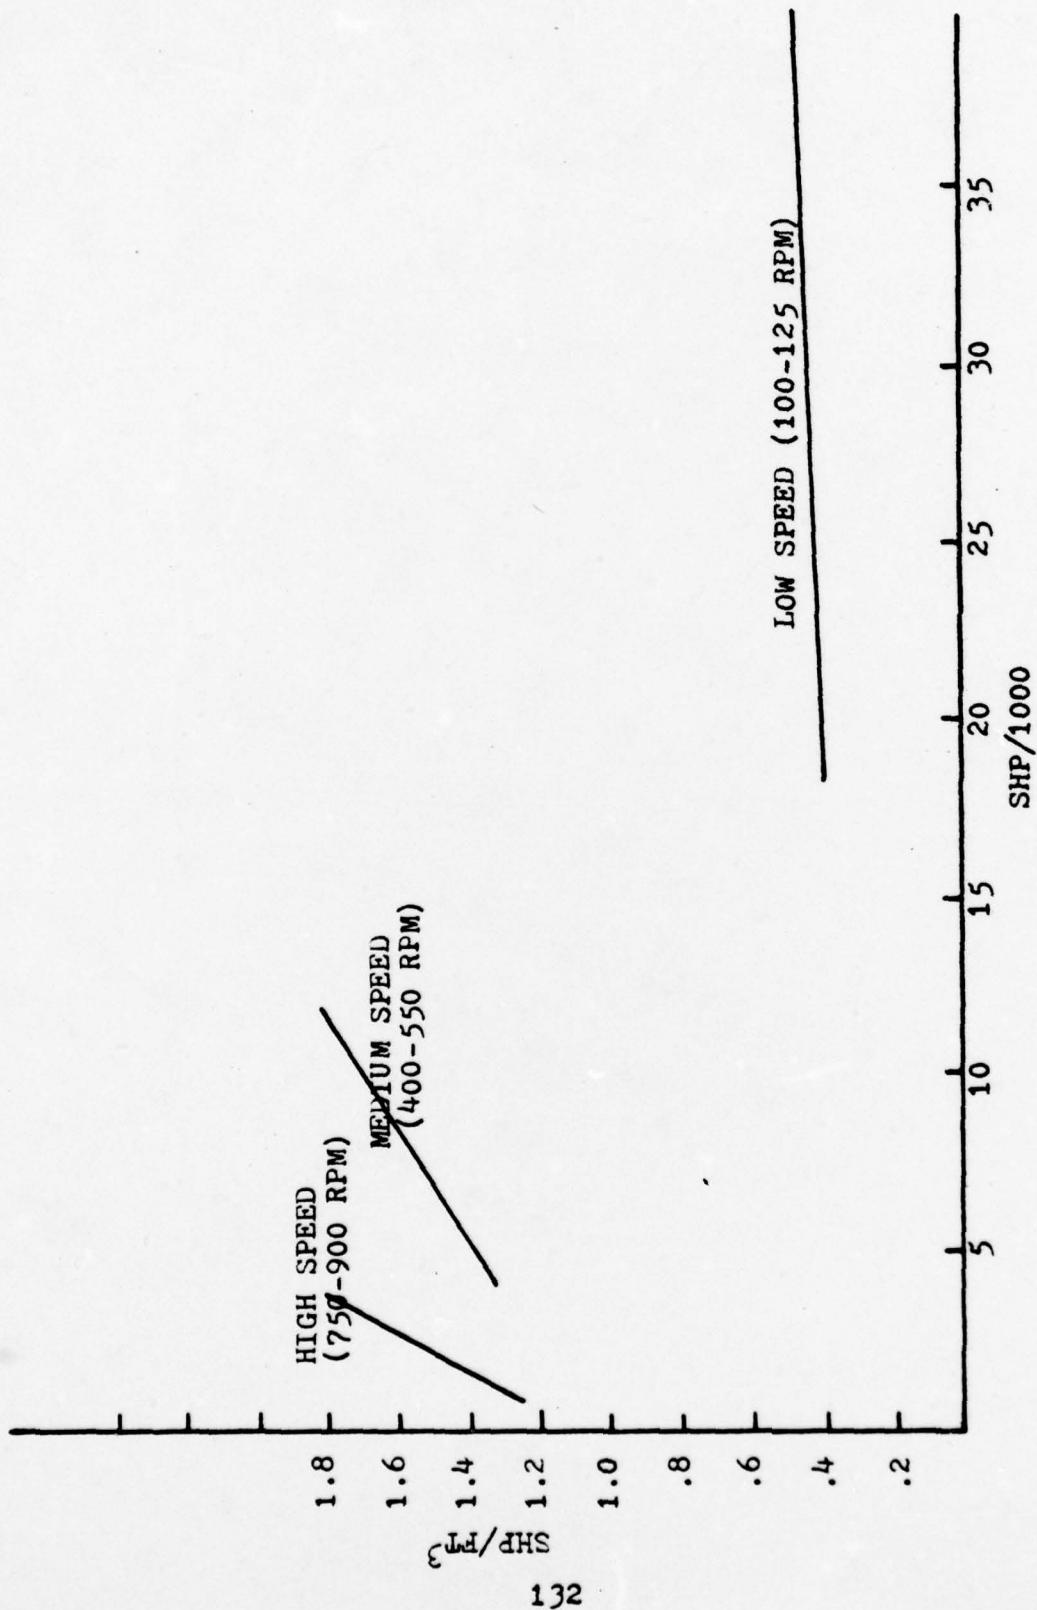
FIGURE IV-12 Diesel Engine: Power Density vs Horsepower
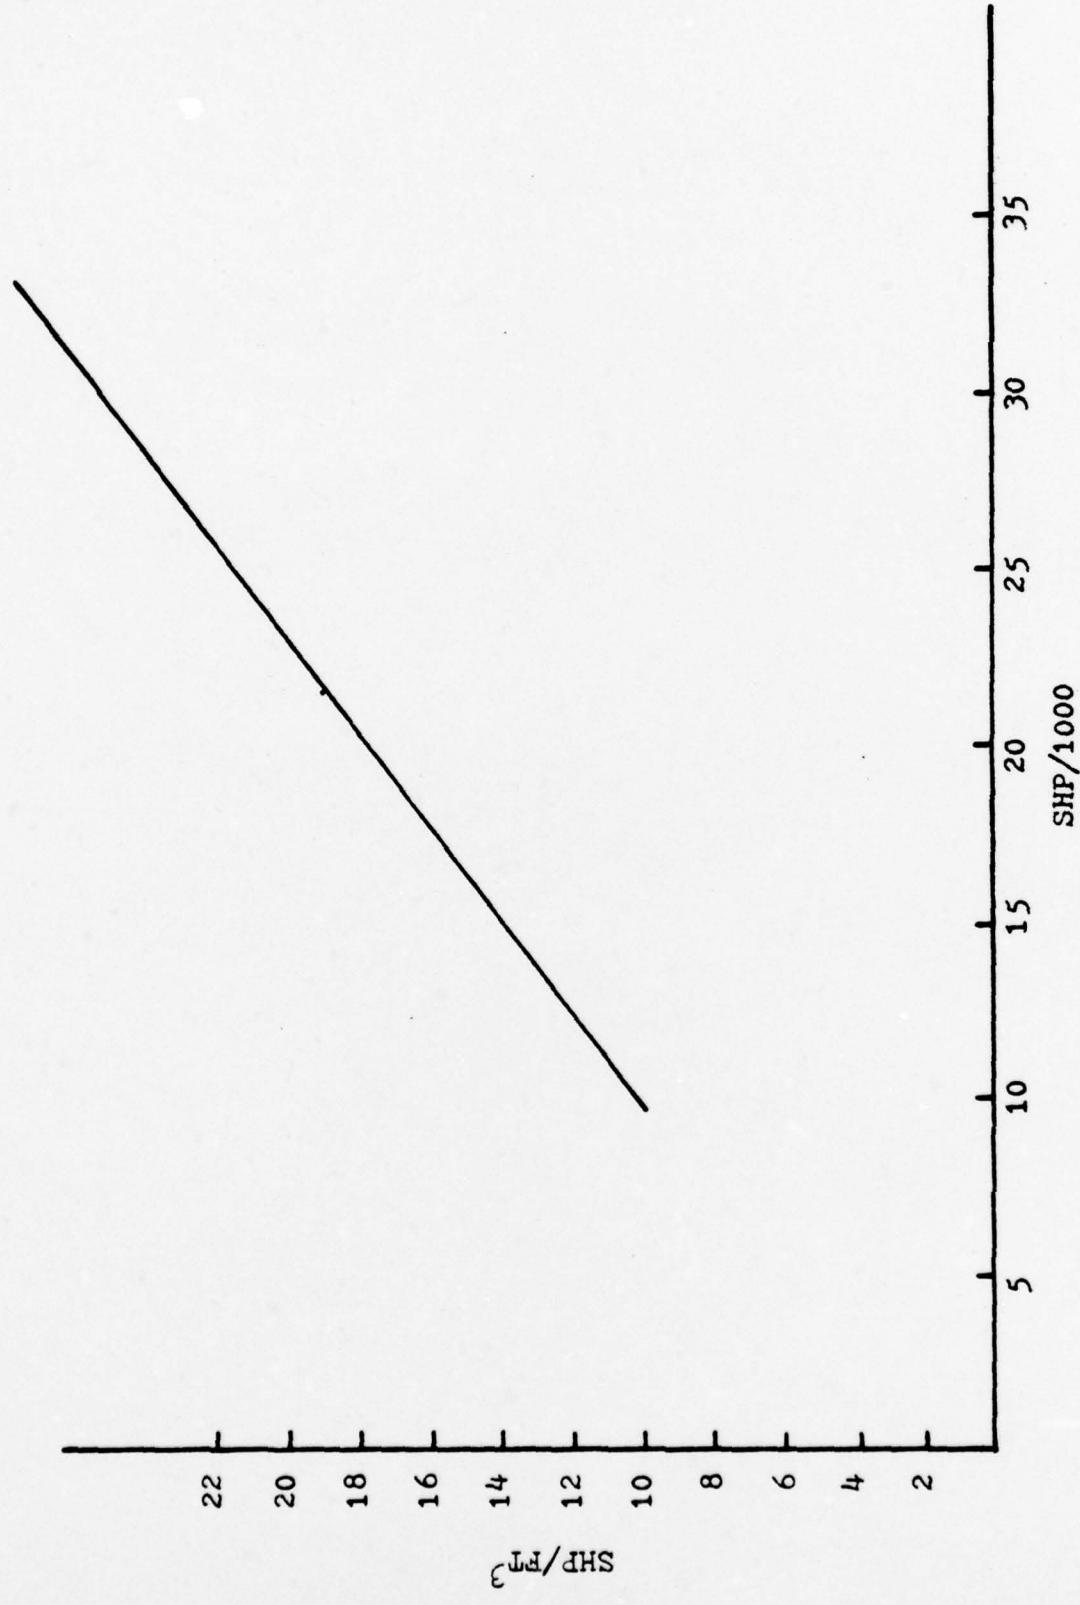
FIGURE IV-13 Gas Turbines: Power Density vs Horsepower

133

MACHINERY BOX VOLUME (V)

$V = 30,851 + 1.472 SHP + 7.735 KW_I$ 600&1200PSI STEAM

$V = .2685 (SHP_I + KW_I/.6)^{1.225}$ NUCLEAR

$V = .8346 (SHP_I + KW_I/.6)^{1.084}$ GT&DIESEL

NUCLEAR

NON-NUCLEAR

DISPLACEMENT

$KW_{I_{MX}}$
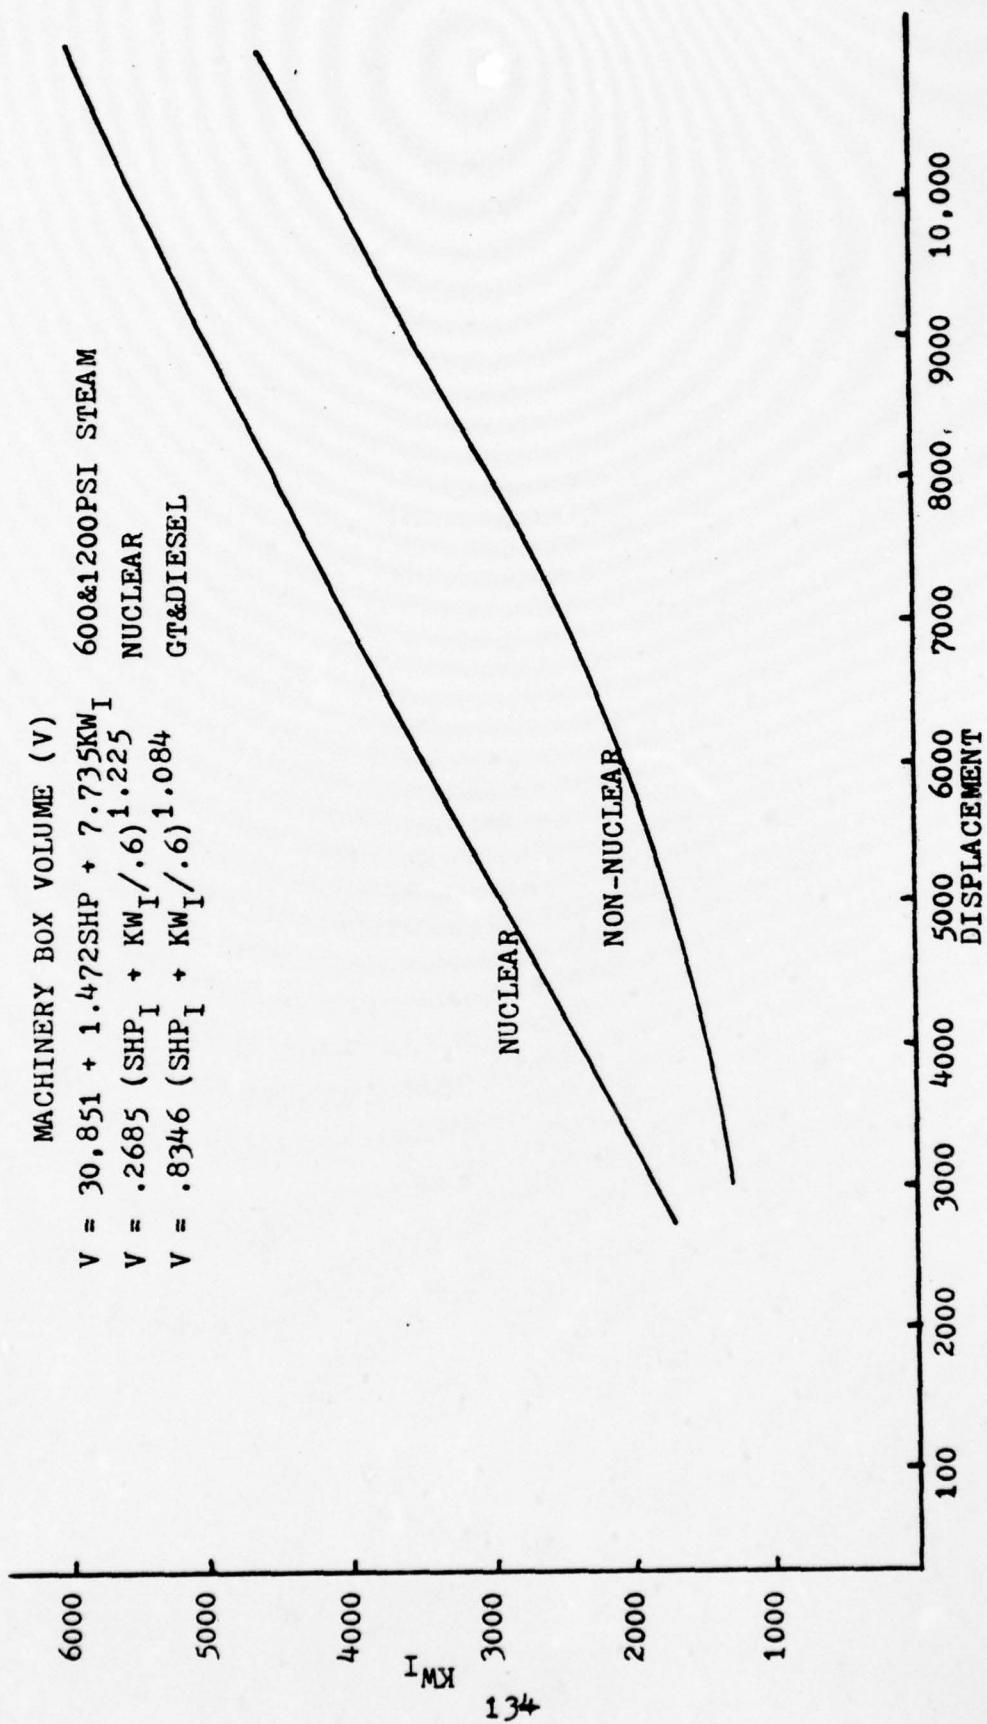
FIGURE IV-14   Installed KW vs Displacement

134

APPENDIX V - PROPULSION PLANT MACHINERY DATA

V.1 <u>INTRODUCTION</u> This appendix presents useful performance
data on basic propulsion components. The curves on boiler and
diesel SFC's are taken from Reference 1.

V.2 <u>LIST OF FIGURES AND TABLES</u>

The Troost curves were reproduced from MIT library copies.

| MODEL | POWER RATING | | | | RPM | WEIGHT |
| | NORMAL | | MAXIMUM | | | |
	(hp)	(sfc)	(hp)	(sfc)		
GE LM2500	20,000	0.41	27,000	0.39	3,600	11,600
GE LM1500	12,500	0.58	14,000	0.57	5,500	7,500
GE LM100	1,000	0.65	NA	NA	19,500	350
TGP/GTPF 990	5,000	0.46	6,200	0.44	3,600	3,201
TP&MS FT4A-2	24,200	0.50	30,000	0.48	3,600	14,200
TP&MS FT4A-12	26,950	0.51	31,500	0.51	3,600	14,200
TP&MS FT4A-14	31,150	0.52	34,700	0.52	3,600	14,300
TP&MS FT4C-2	35,500	0.47	44,100	0.46	3,600	NA
TP&MS FT12A-3	2,500	0.82	3,770	0.72	9,000	1,150
TP&MS FT12A-6	3,150	0.74	4,180	0.71	9,000	1,150
Allison 501K	3,780	0.54	NA	NA	13,820	2,500
Solar T3001	3,000	0.56	3,120	0.55	14,300	5,500
Lycoming TF12A	1,000	0.72	1,100	0.62	18,500	920
Lycoming TF14B	1,250	0.60	1,375	0.59	18,500	920
Lycoming TF25A	2,000	0.63	2,200	0.62	14,000	1,020
Lycoming TF35	2,500	0.57	2,750	0.56	14,000	1,090

TABLE V-1 GAS TURBINE MARINE ENGINES (11)

	BHP	RPM	SFC	L.O. CONSUMP. bhp-hr gal
GM				
8-645E5	1,450	900	0.38	3,410
12-645E5	2,150	900	0.37	3,410
16-645E5	2,875	900	0.378	3,410
20-645E5	3,600	900	0.375	3,410
FAIRBANKS				
6 CYL	1,800	900	0.375	4,000
9 CYL	2,700	900	0.375	4,000
12-CYL	3,600	900	0.375	4,000
ENTERPRISE				
R-46	3,656	450	0.369	15,000
R-48	4,875	450	0.369	15,000
RV-12-4	7,313	450	0.369	15,000
RV-16-4	9,751	450	0.369	15,000
RV-20-4	12,187	450	0.369	15,000

TABLE V-2   DIESEL ENGINES (1)

137
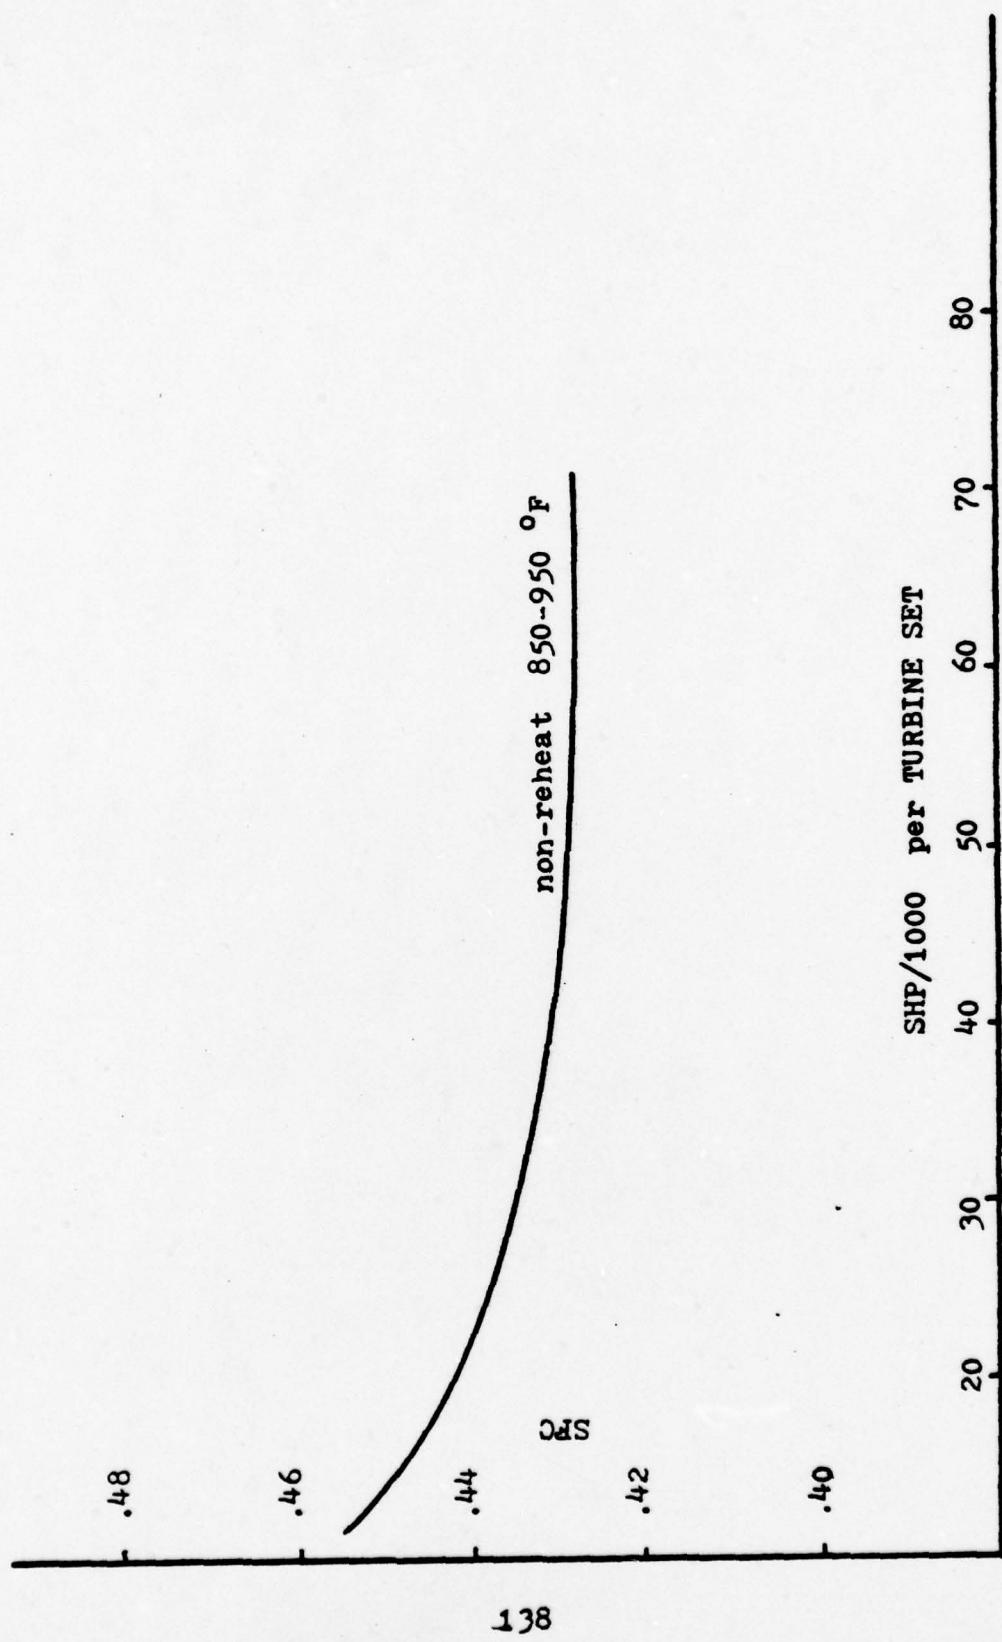
FIGURE V-1 1200 PSI Steam Plant Fuel Rate vs Horsepower

138
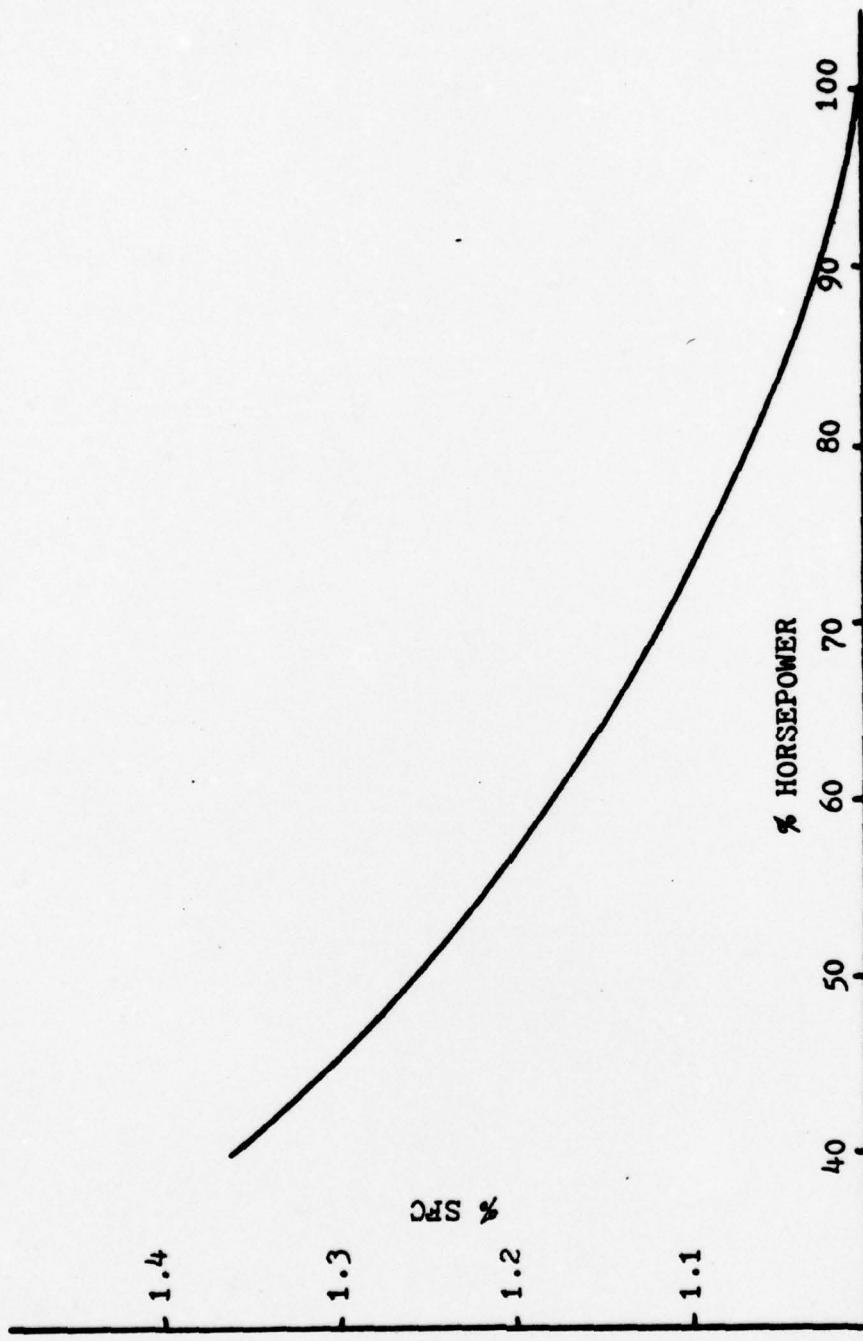
FIGURE V-2 Simple Cycle Gas Turbine Part Load Characteristics (8)

139

SFC

.42
.40
.38
.36
.34

140

40   60   80   100
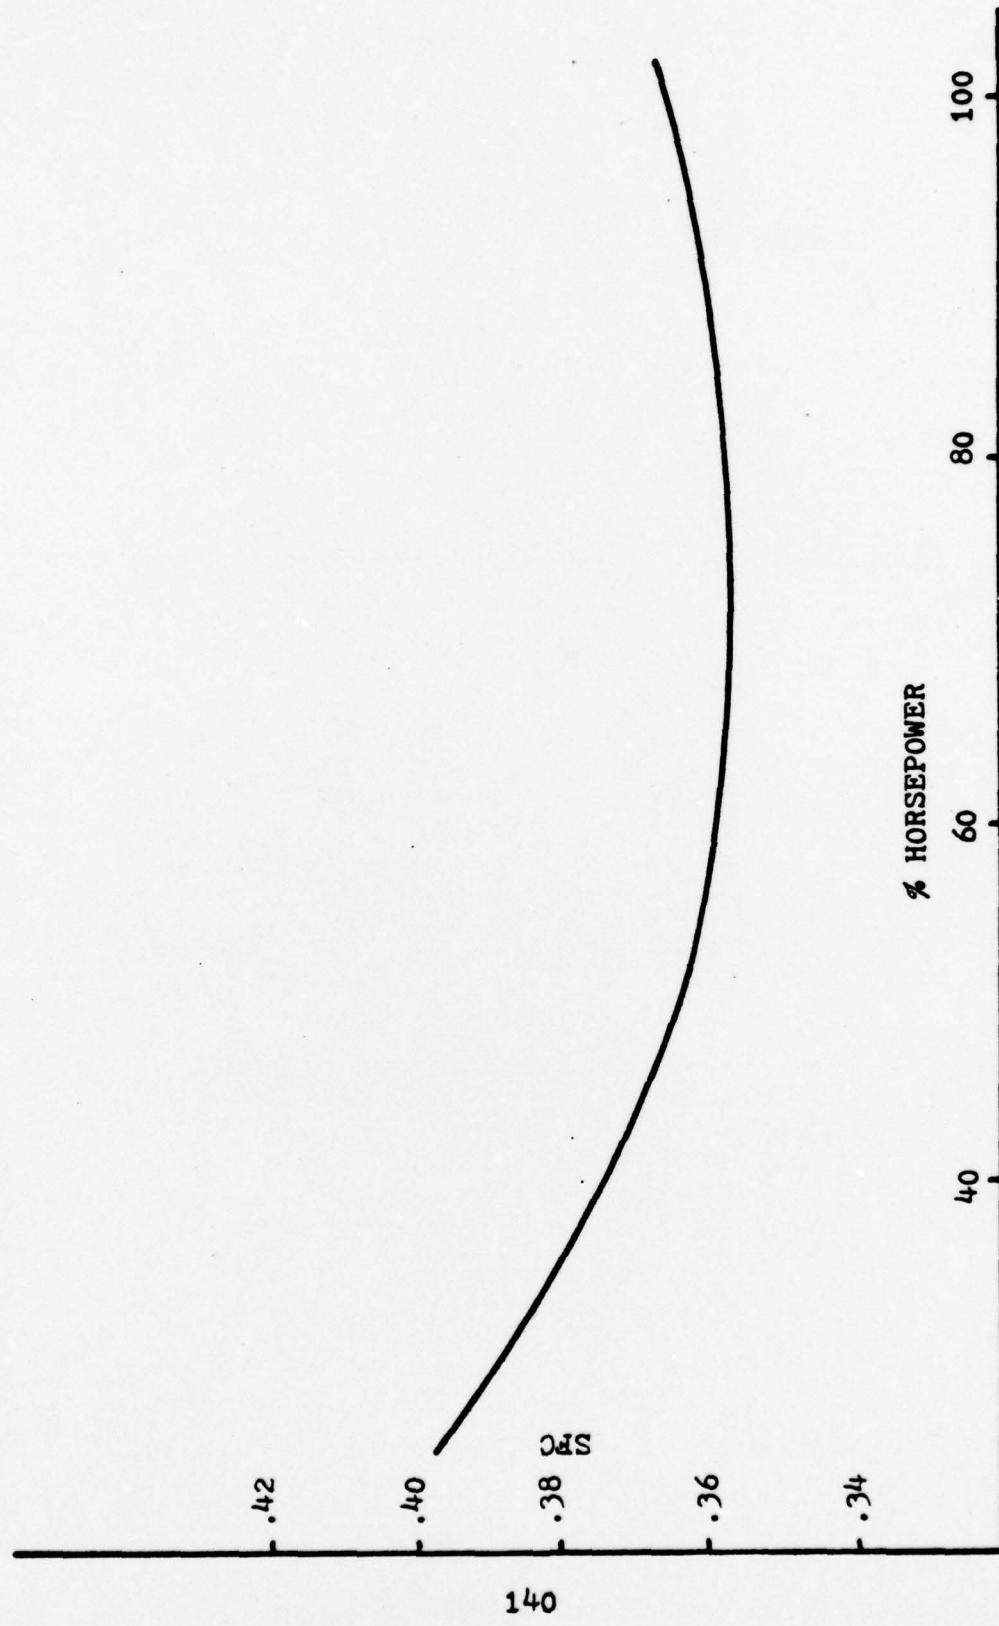
% HORSEPOWER

FIGURE V-3 Enterprise Diesels: Fuel Rate vs Per-Cent Horsepower
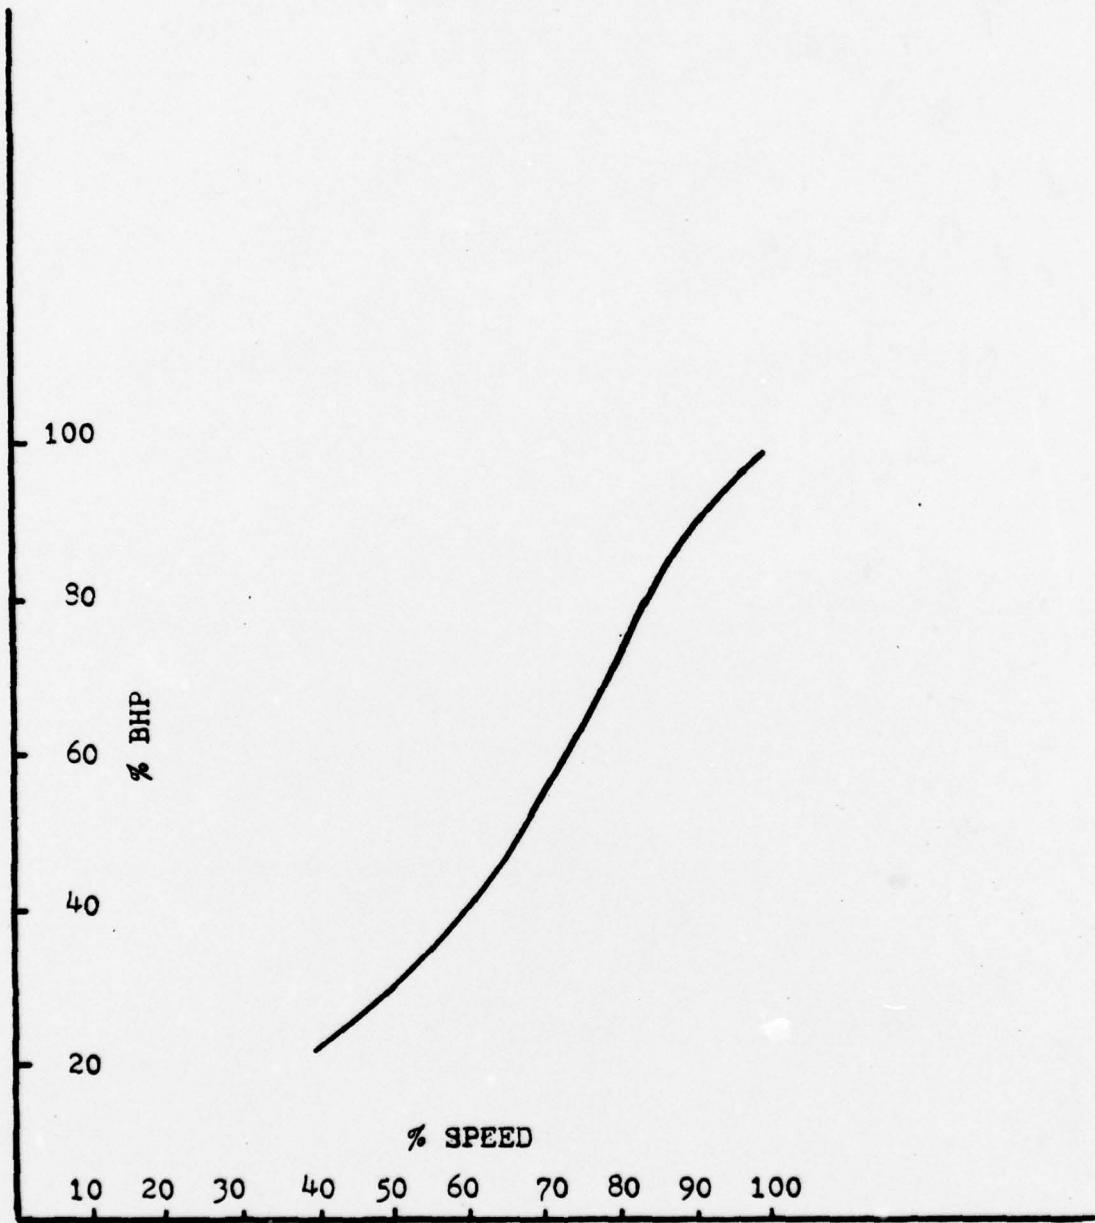
FIGURE V-4   Enterprise Diesels: Horsepower vs RPM

141
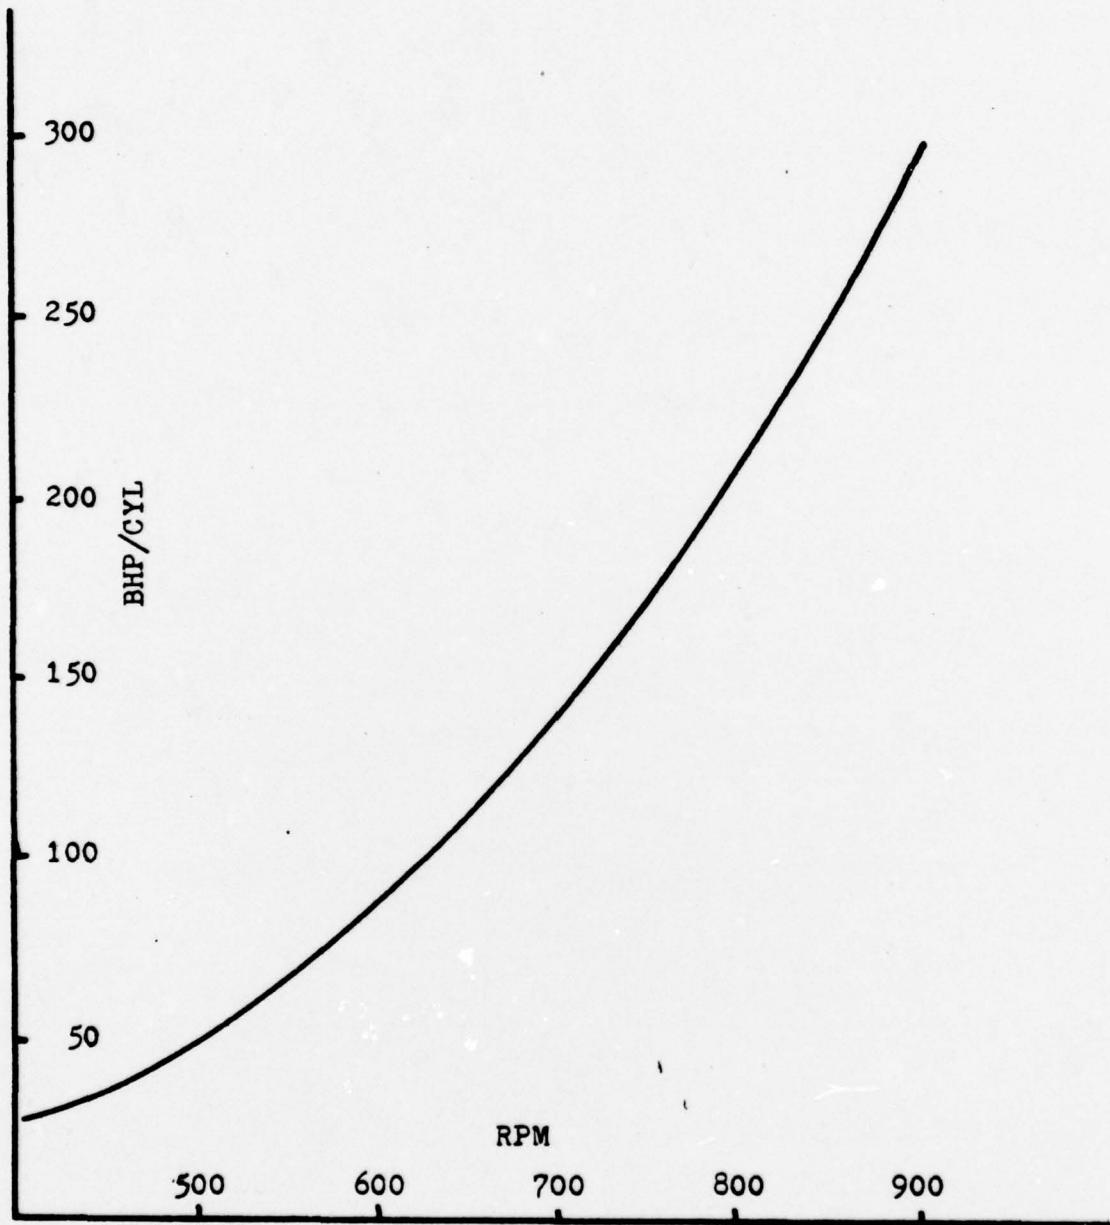
FIGURE V-5   Fairbanks Morse Diesel: Horsepower vs RPM

142
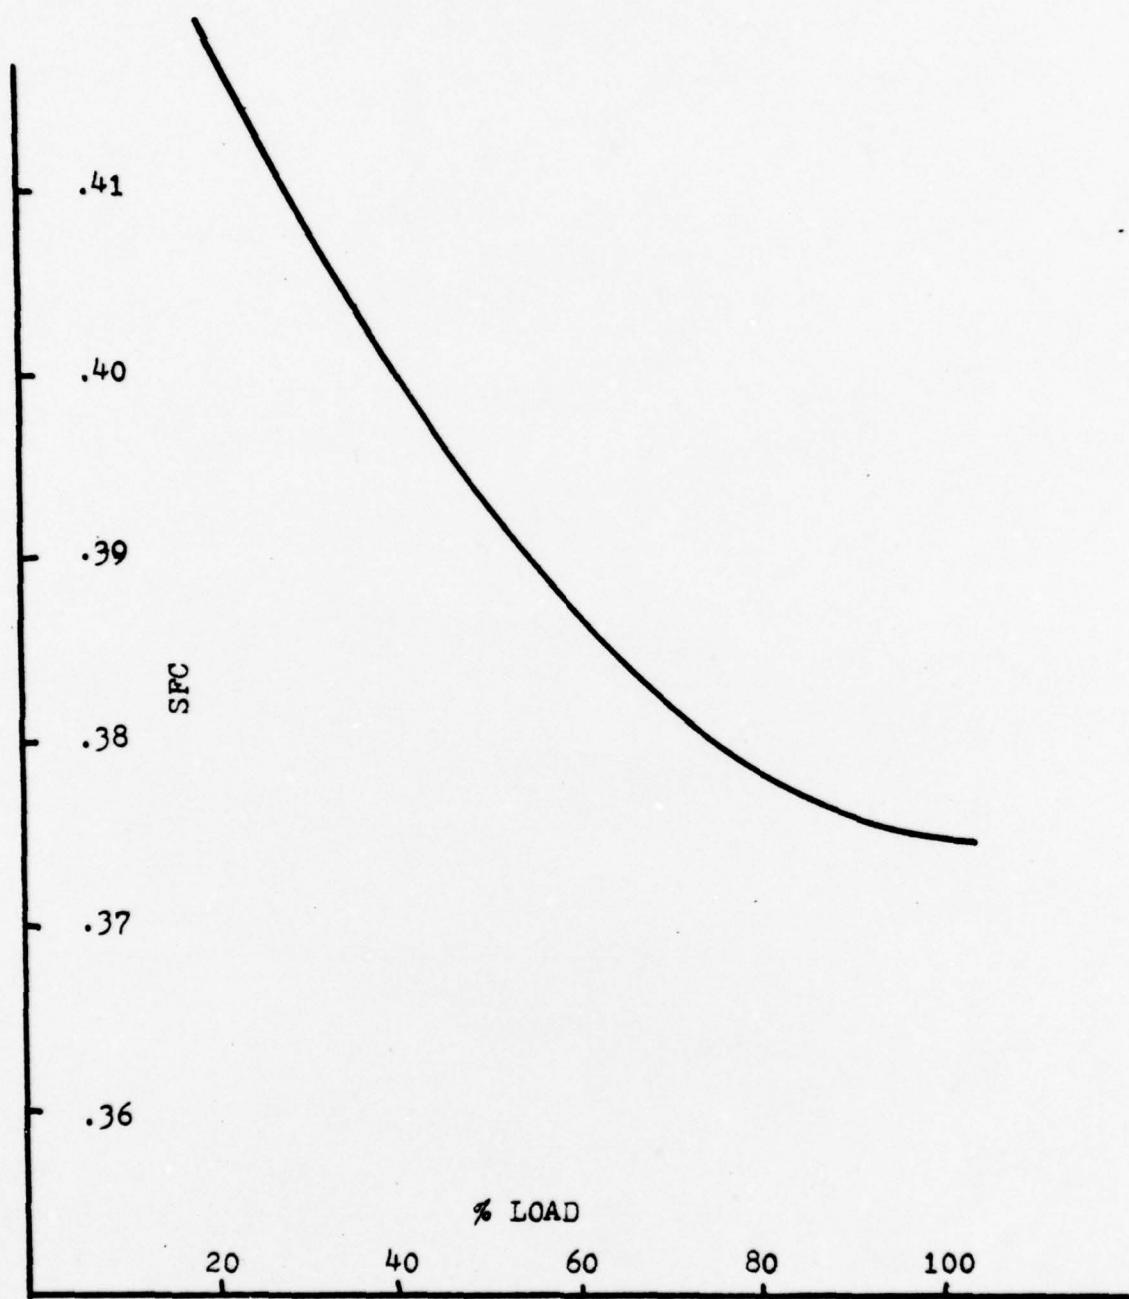
FIGURE V-6   Fairbanks Morse Diesel: Fuel Consumption

143
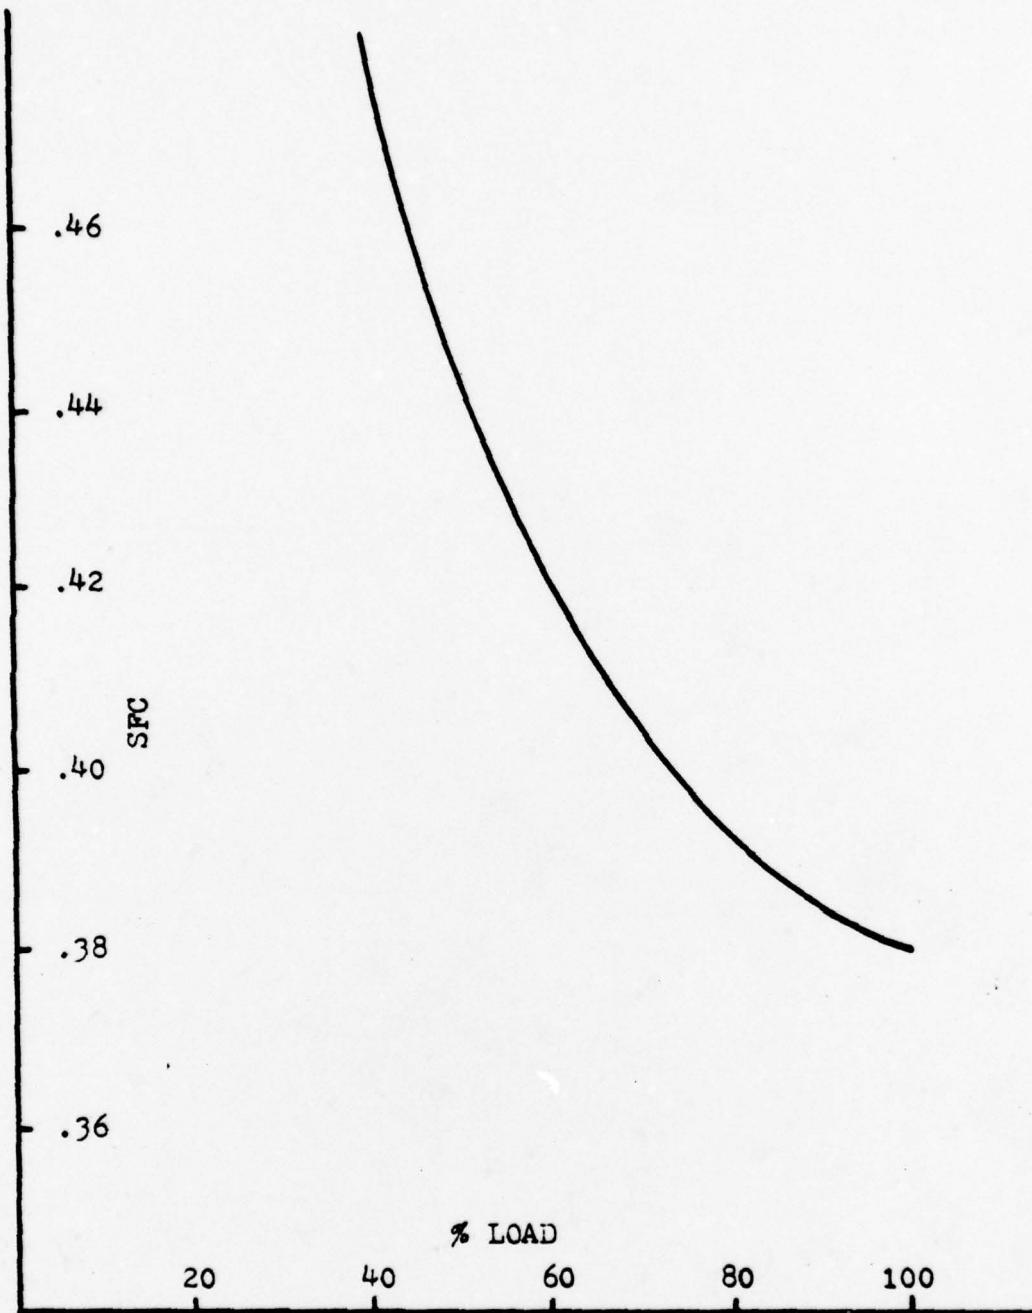
FIGURE V-7   GM-645E5 Diesel: Fuel Consumption

144
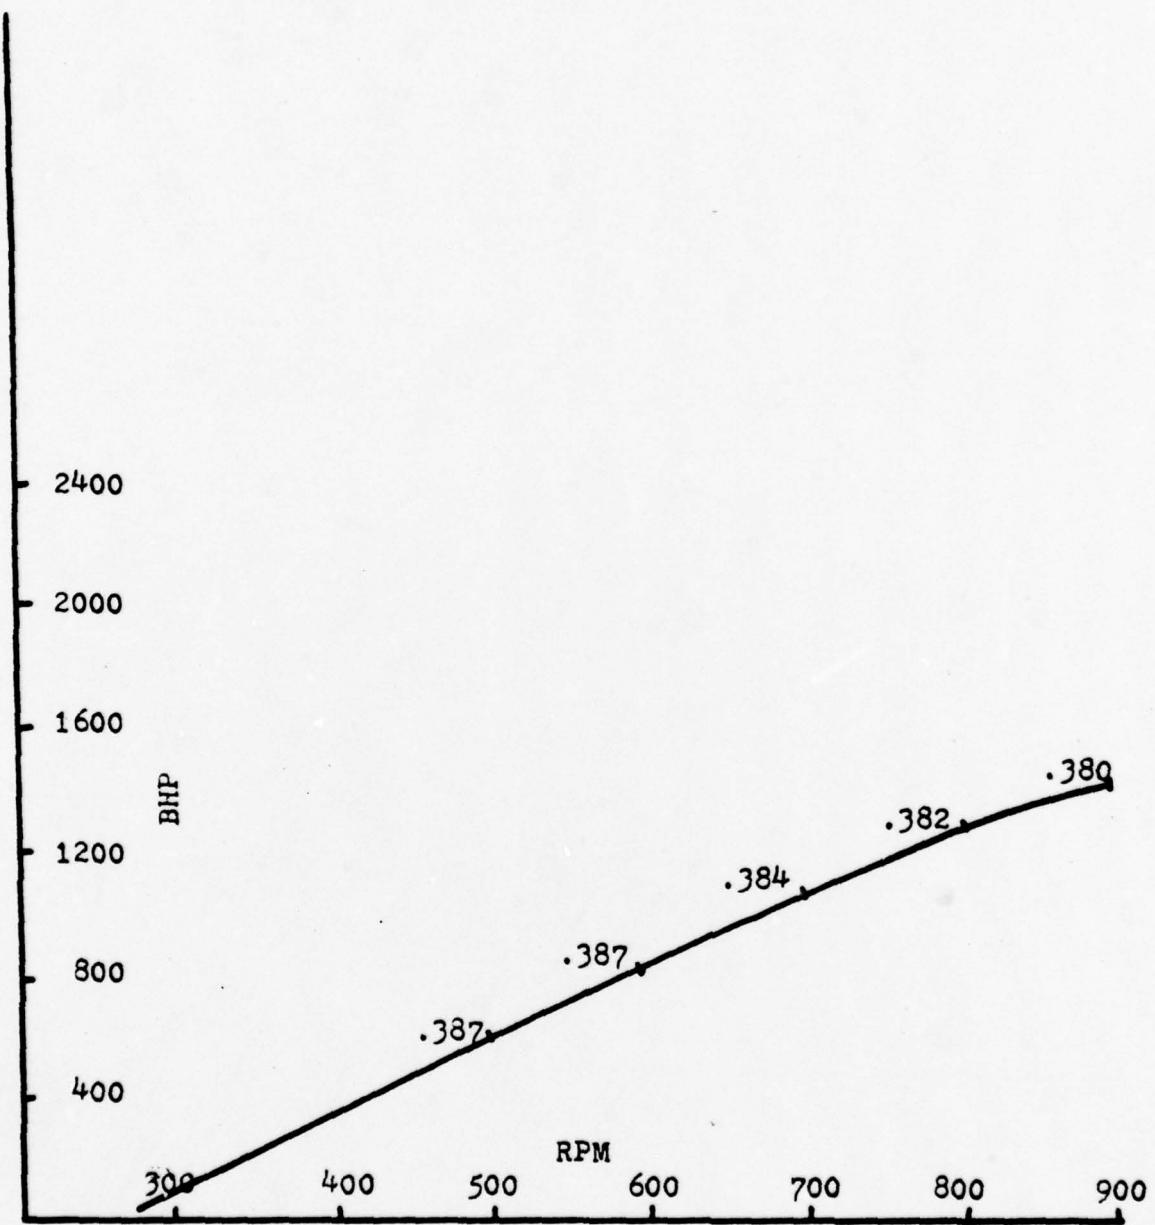
FIGURE V-8 GM-8645E5 Diesel: Horsepower vs RPM
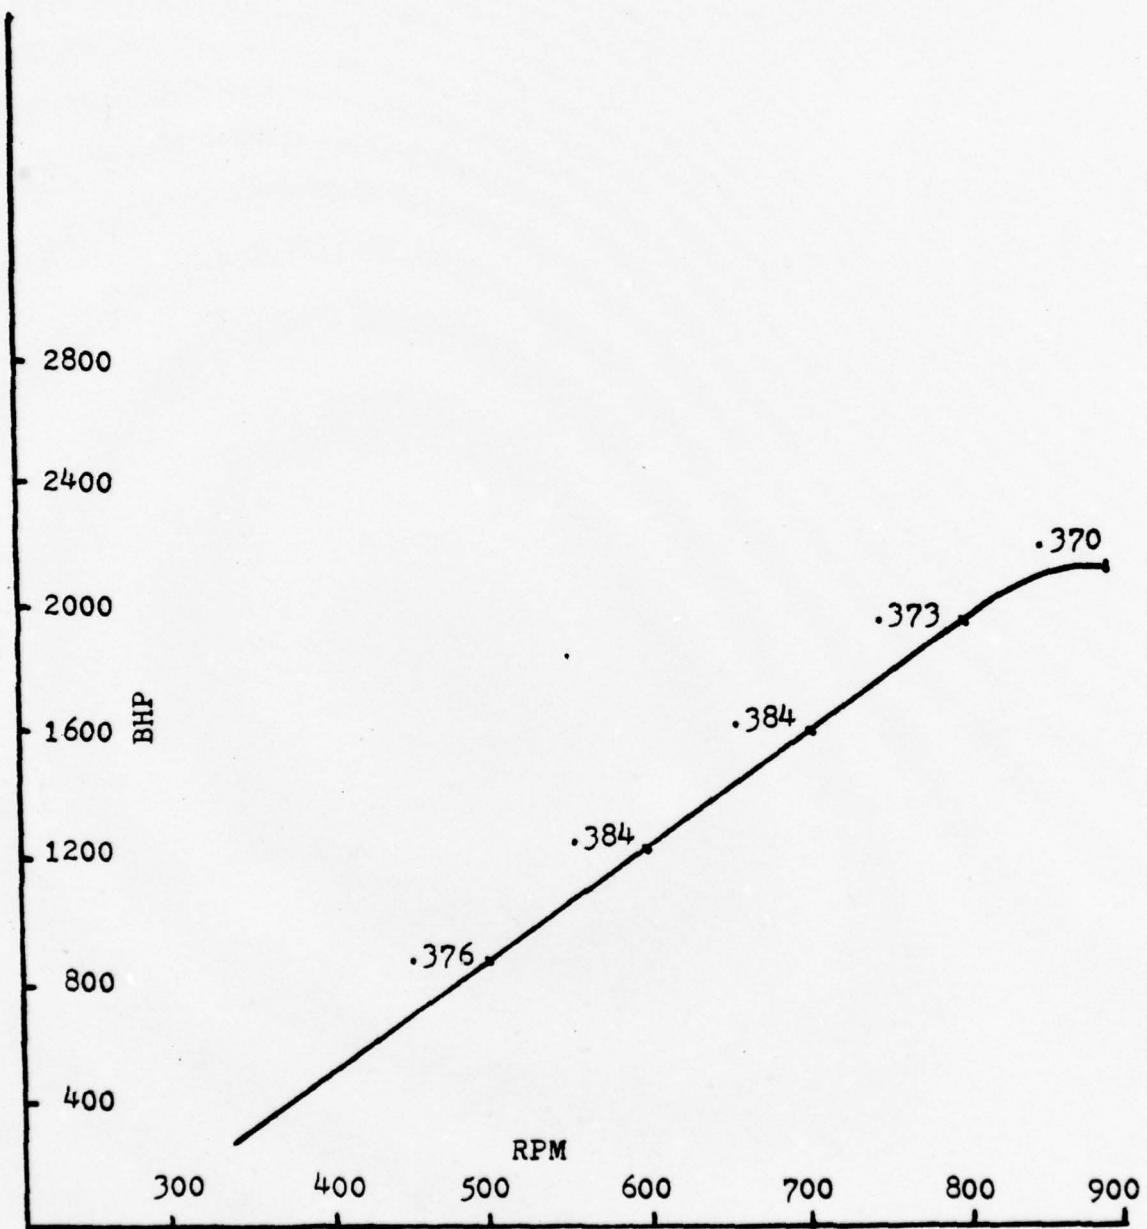
FIGURE V-9 GM 12645E5 Diesel: Horsepower vs RPM

146
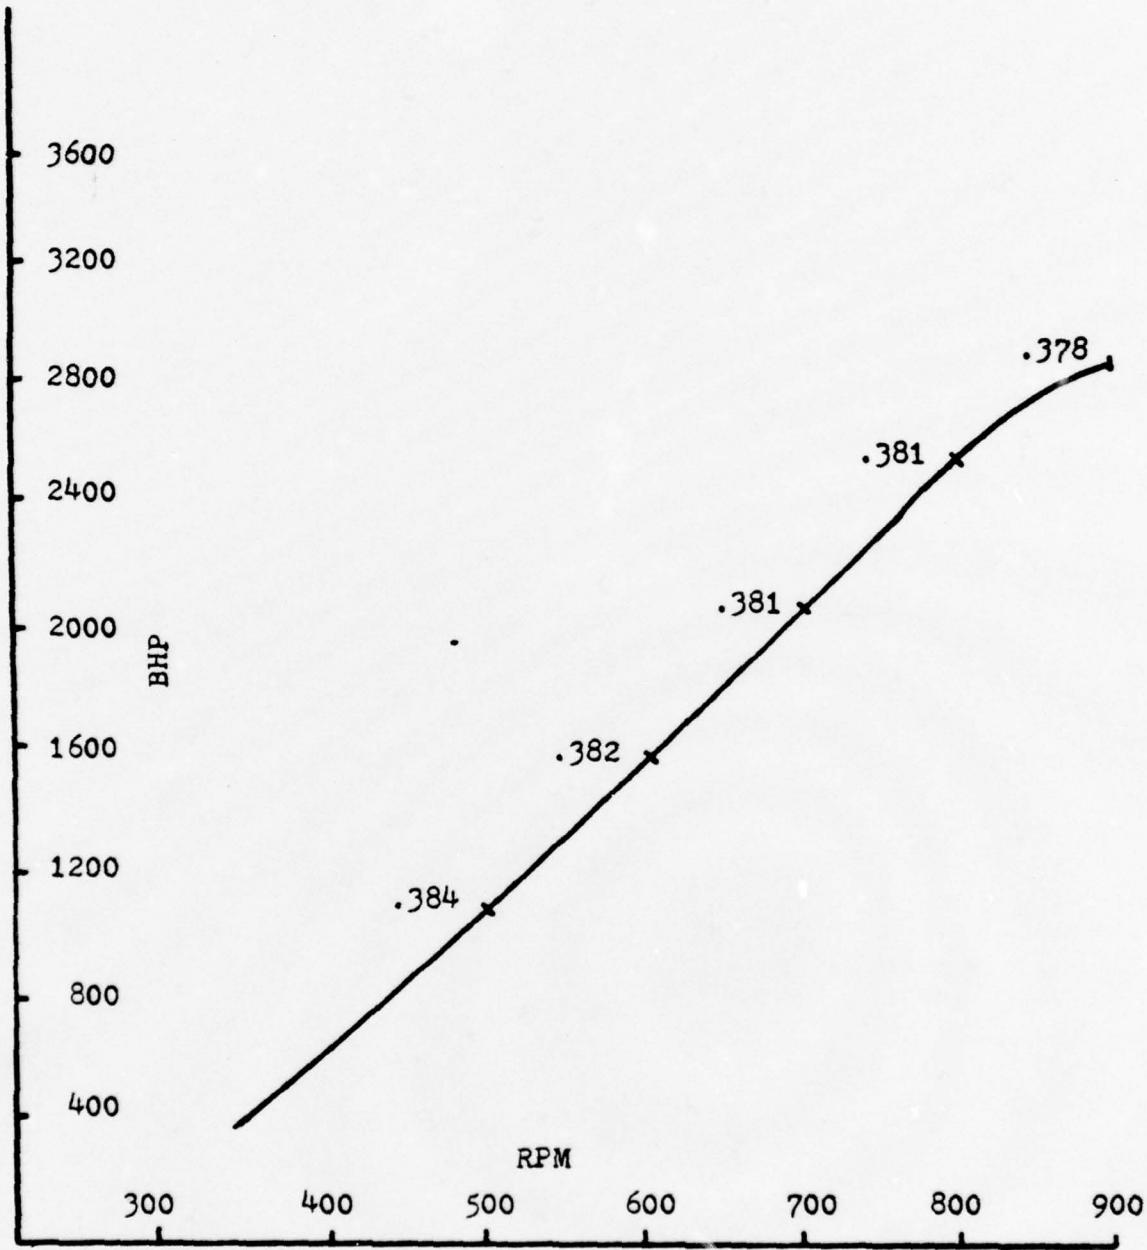
FIGURE V-10 GM-1645E5 Diesel: Horsepower vs RPM

147
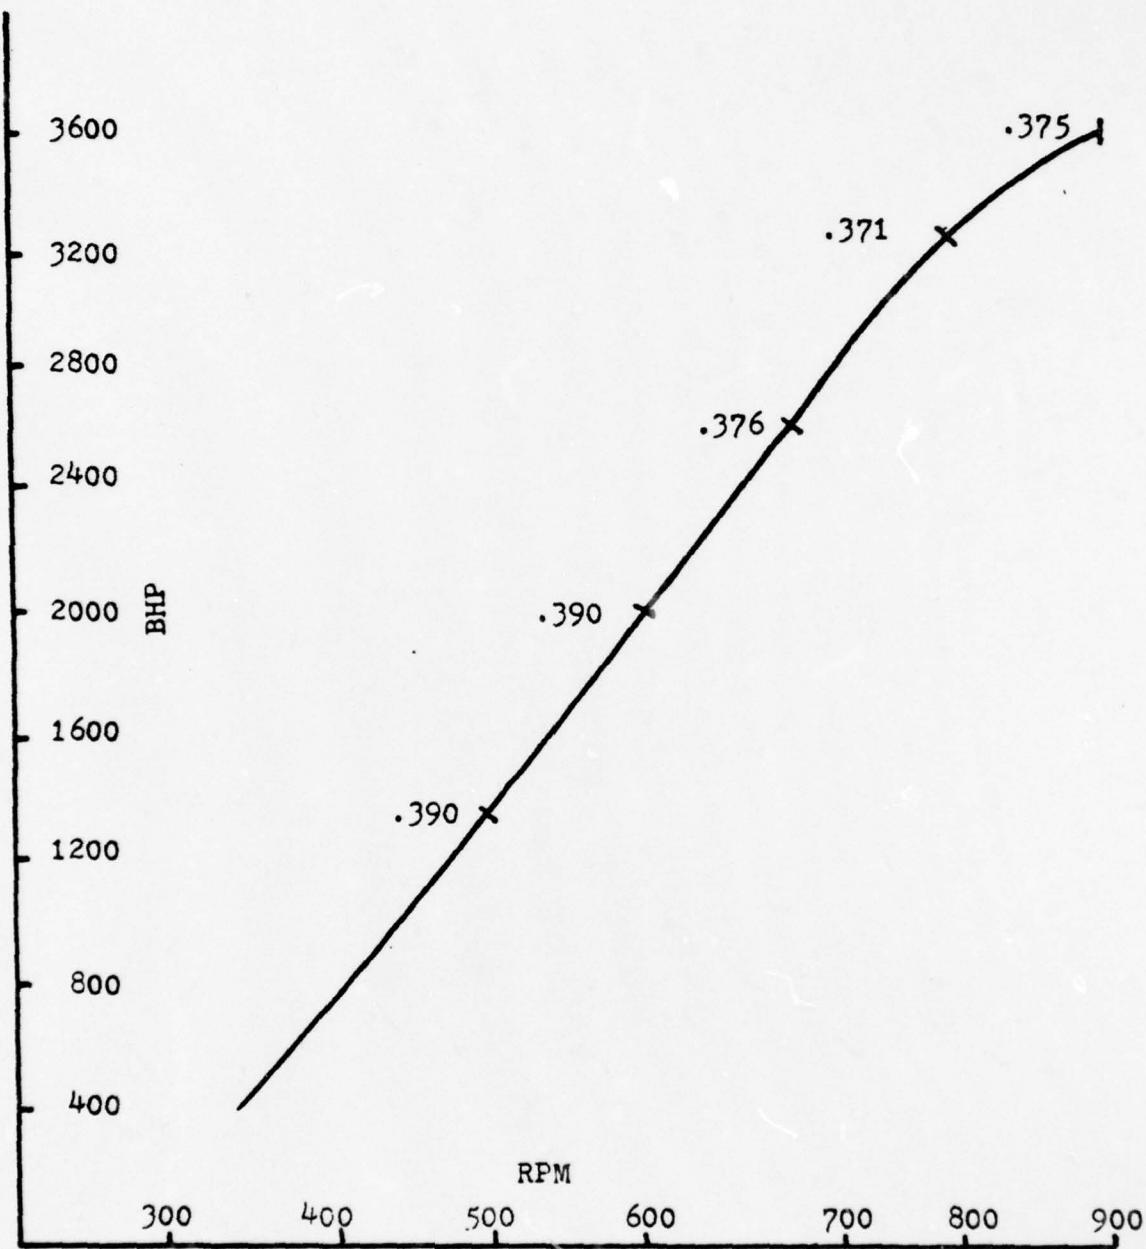
FIGURE V-11   GM-20645E5 Diesel: Horsepower vs RPM
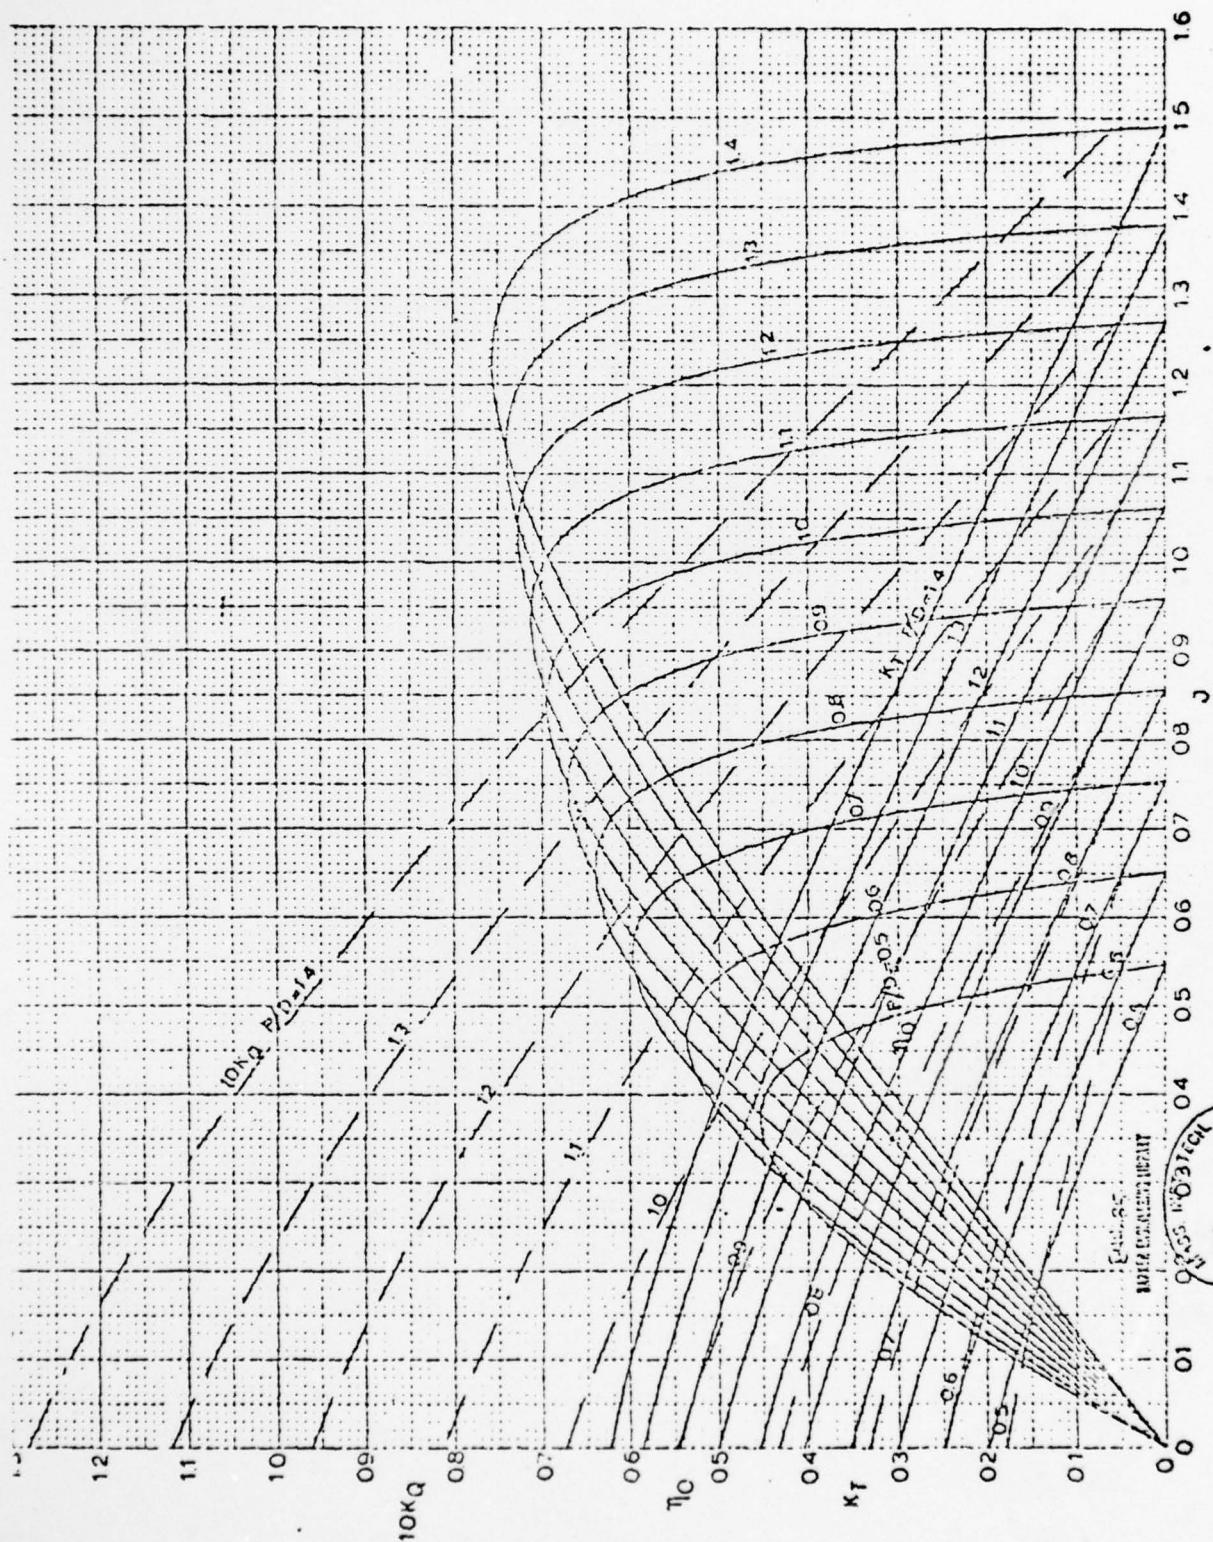
FIGURE V-12 Troost Curve: B4-70

149

FIGURE V-13 Troost Curve, B4-85

150

FIGURE V-14 Troost Curve: B4-100

151
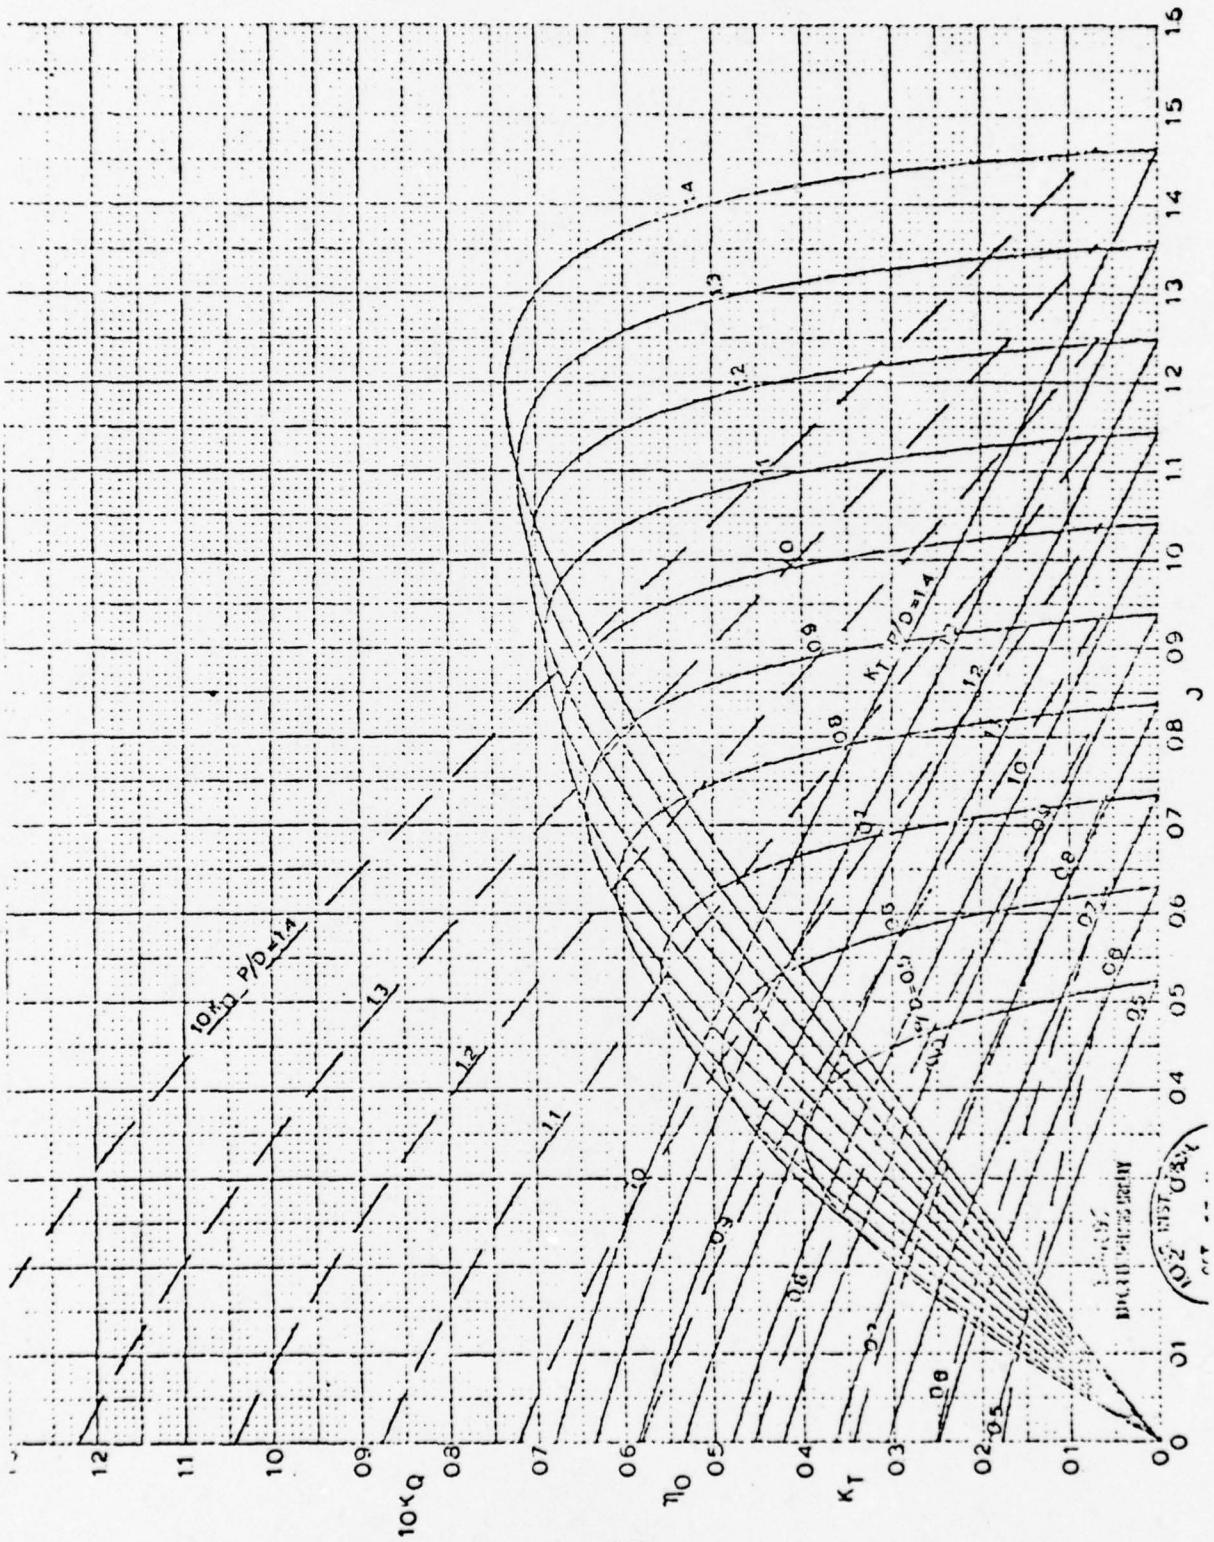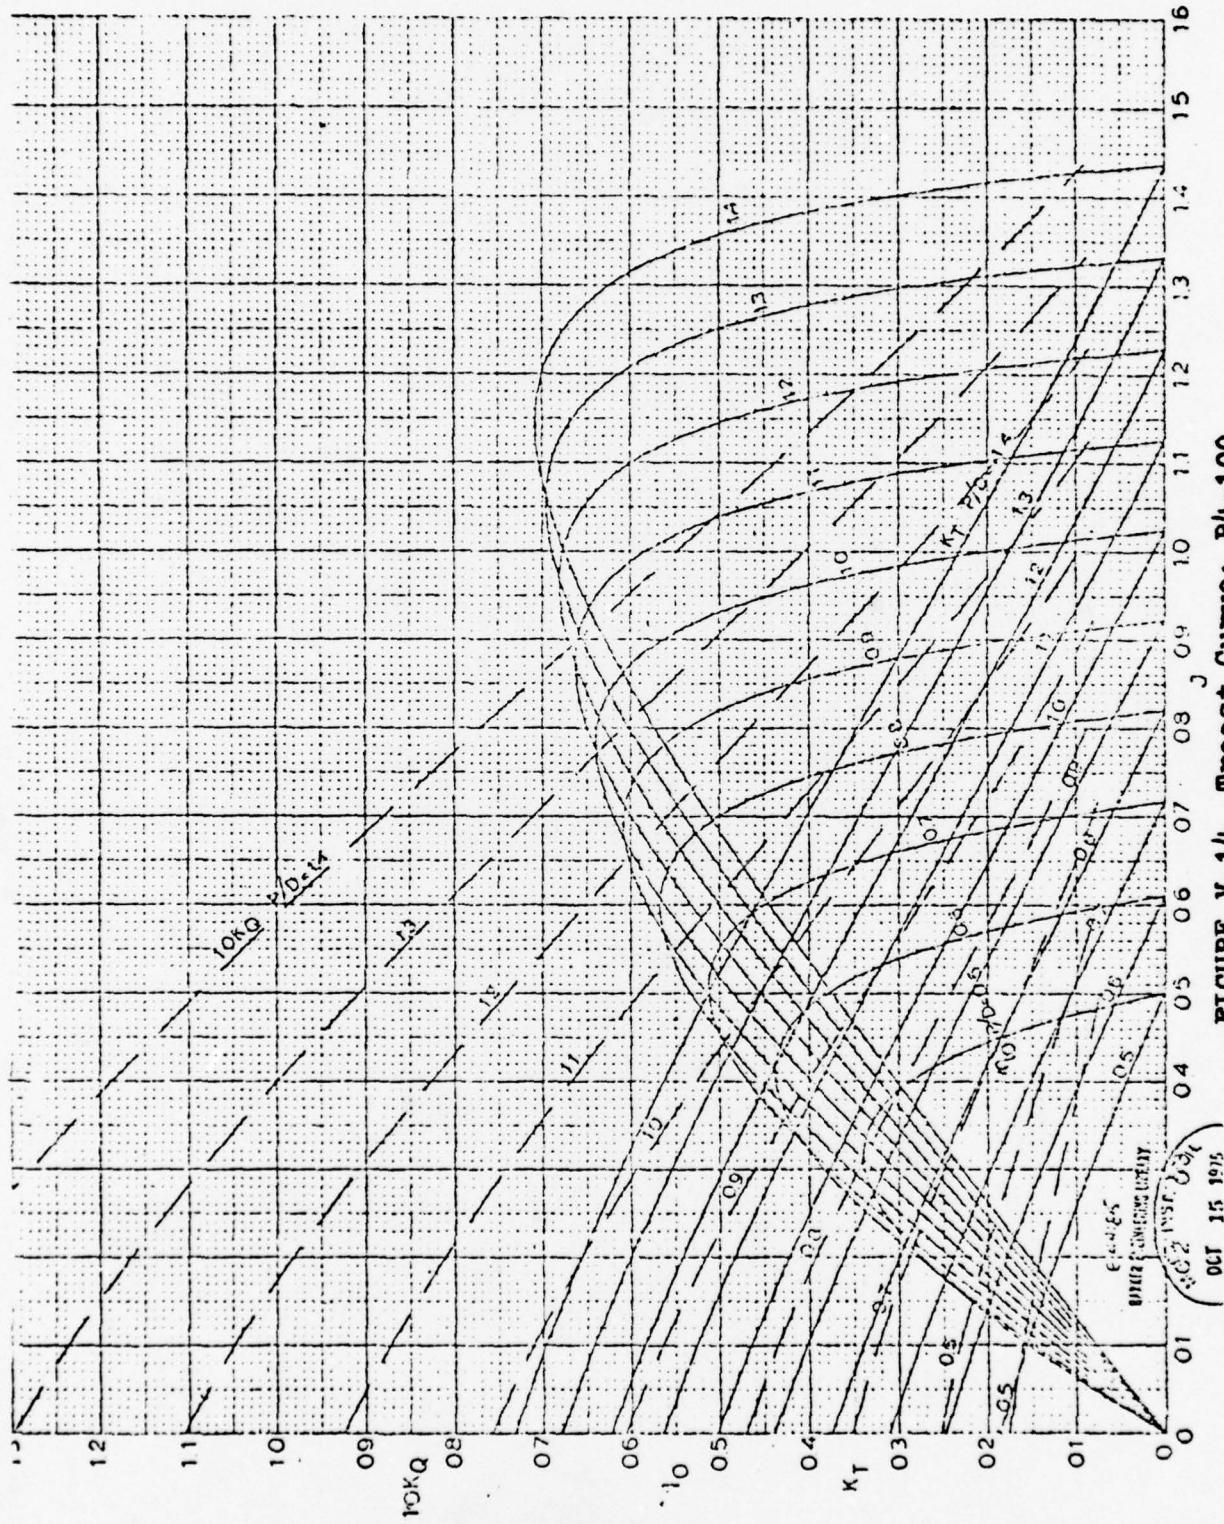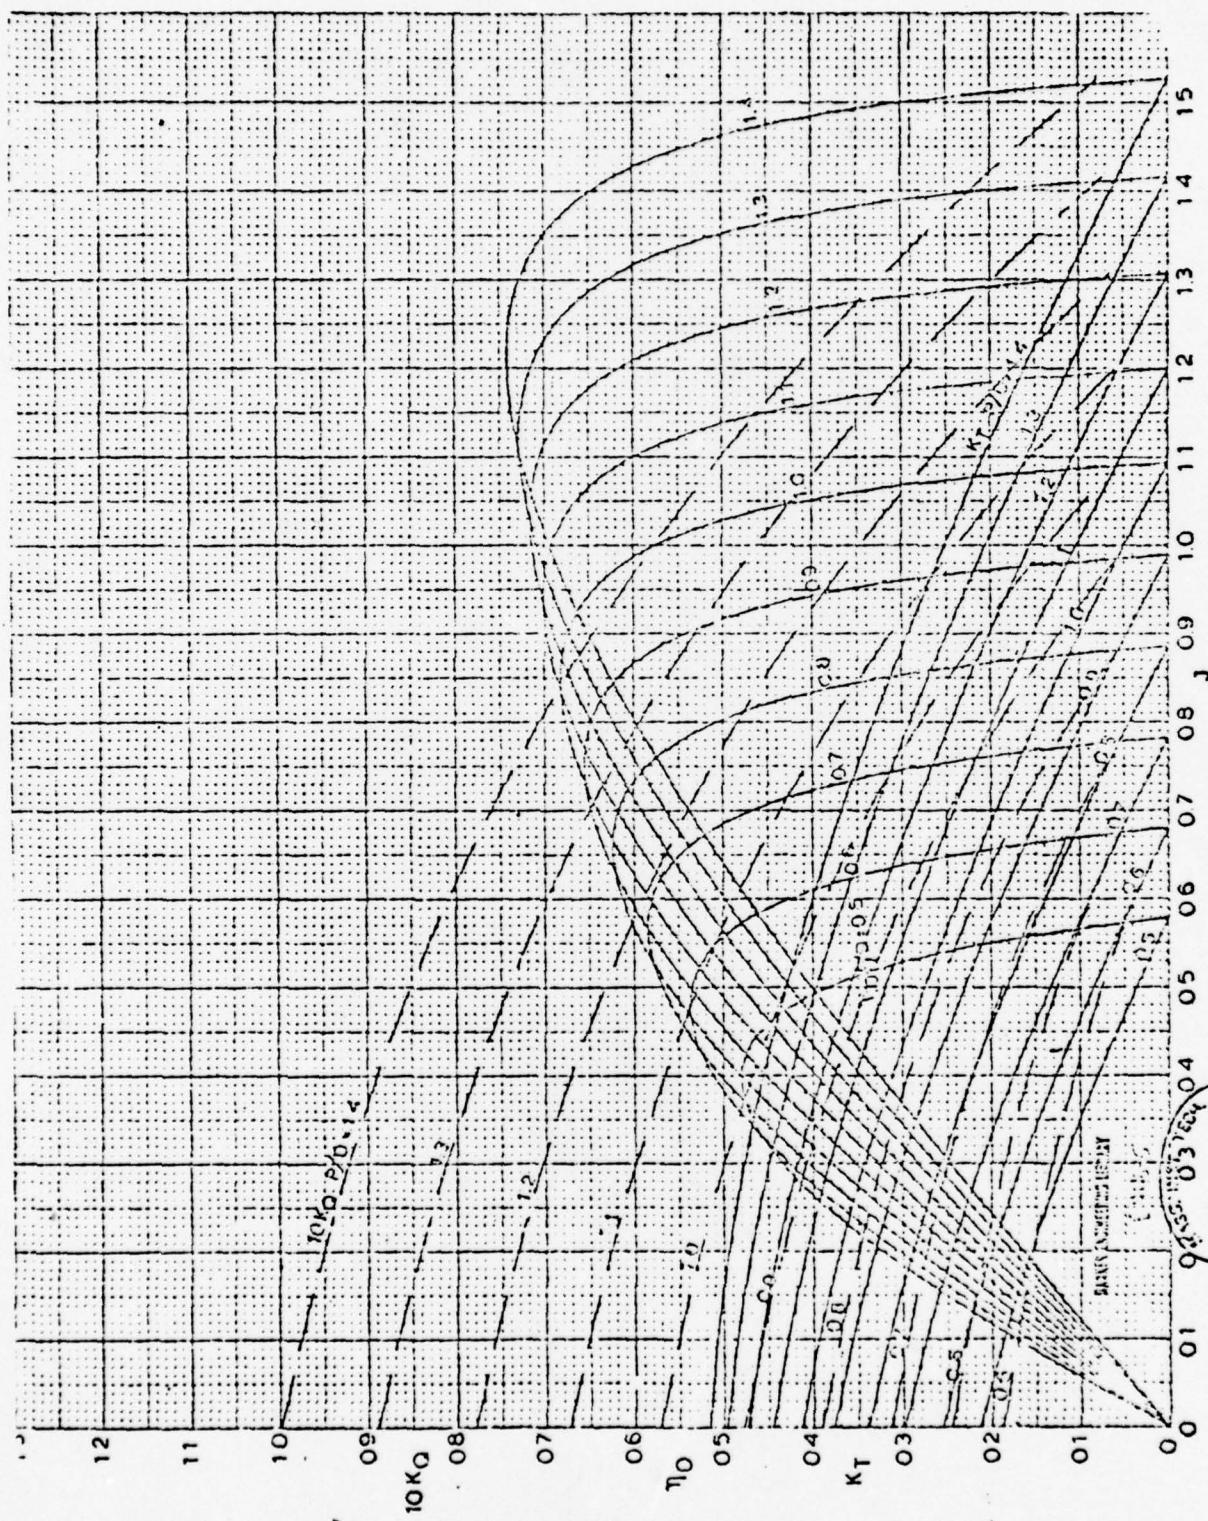
FIGURE V-15 Troost Curves B5-45

152
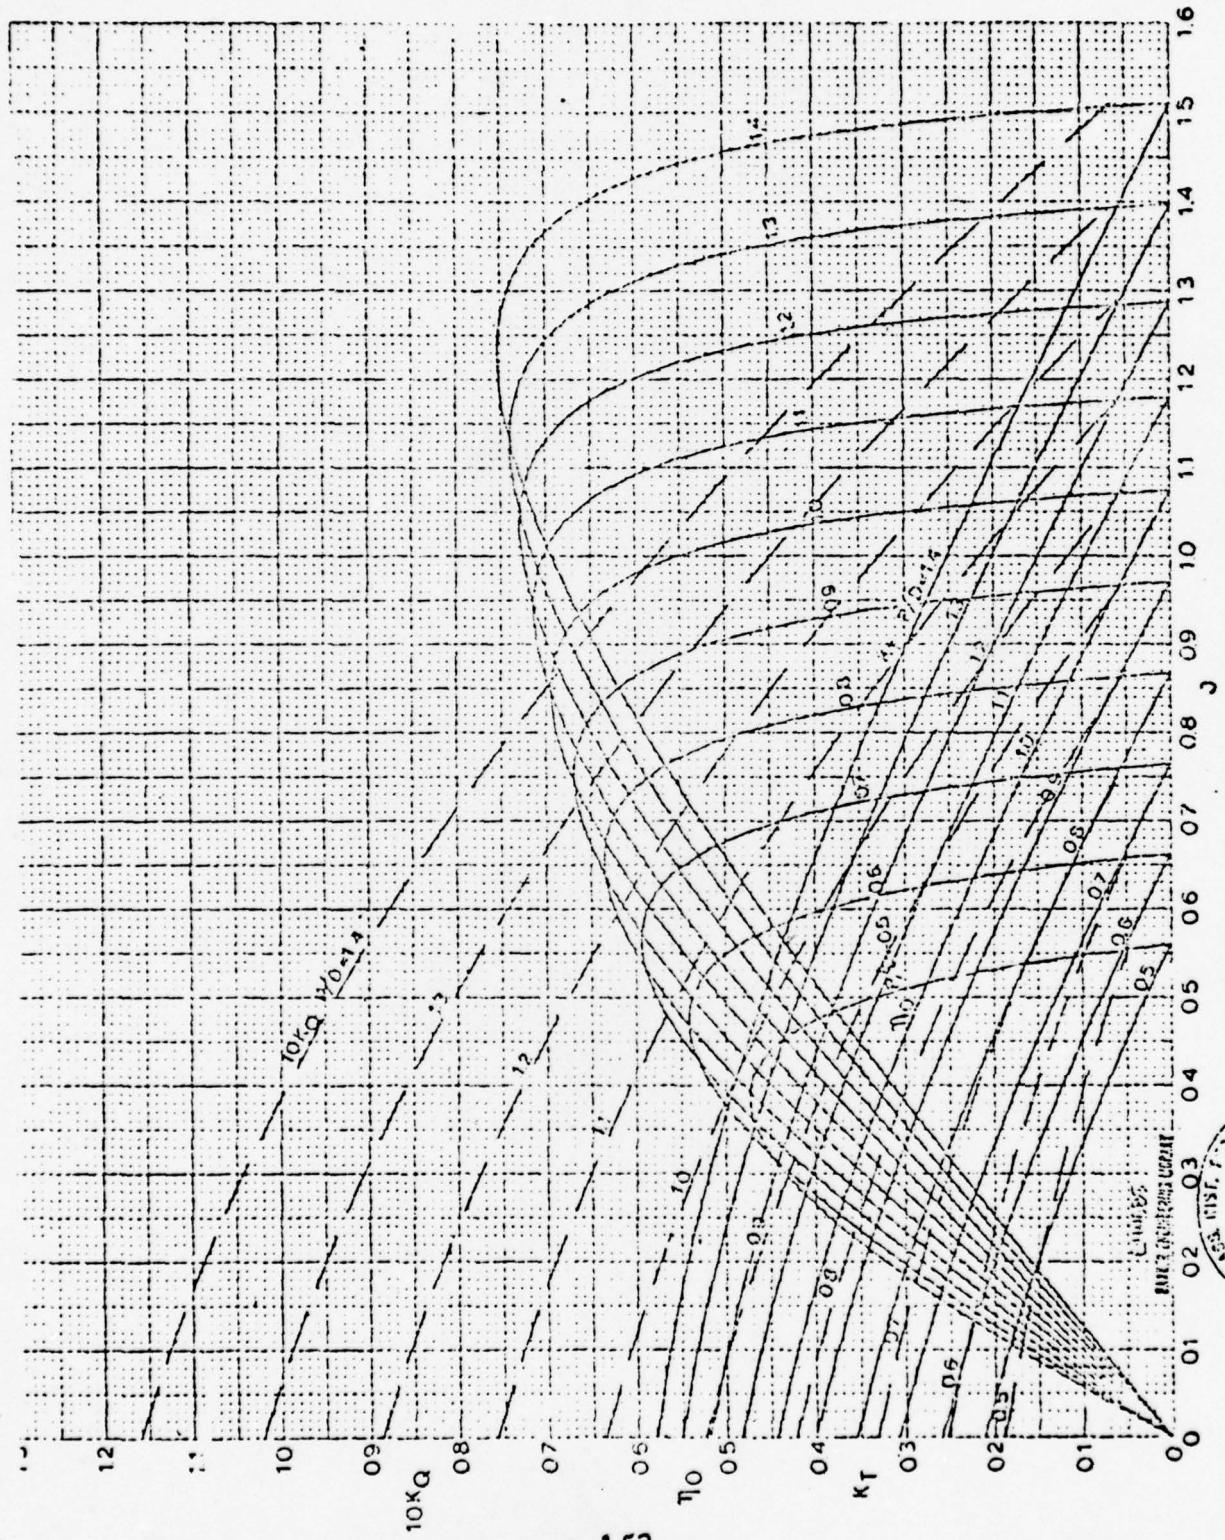
FIGURE V-16 Troost Curve: B5-60

153
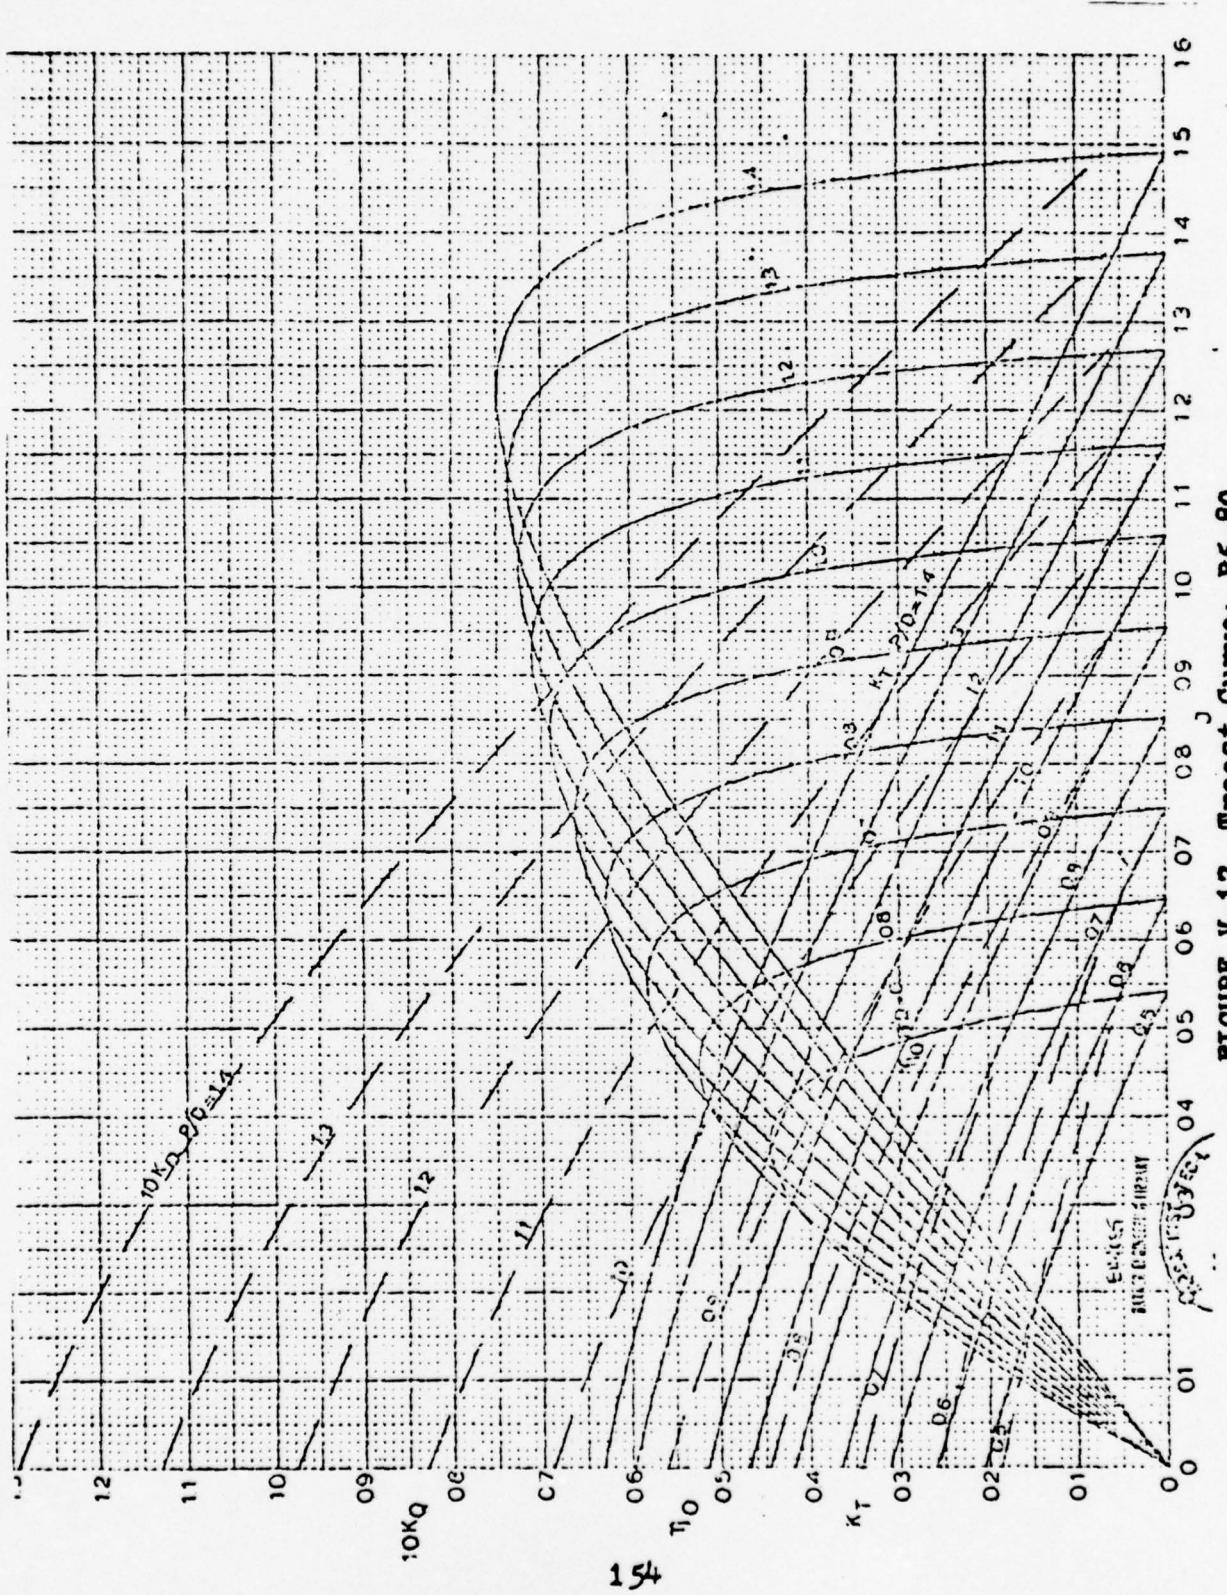
FIGURE V-17 Troost Curve, B5-80

154
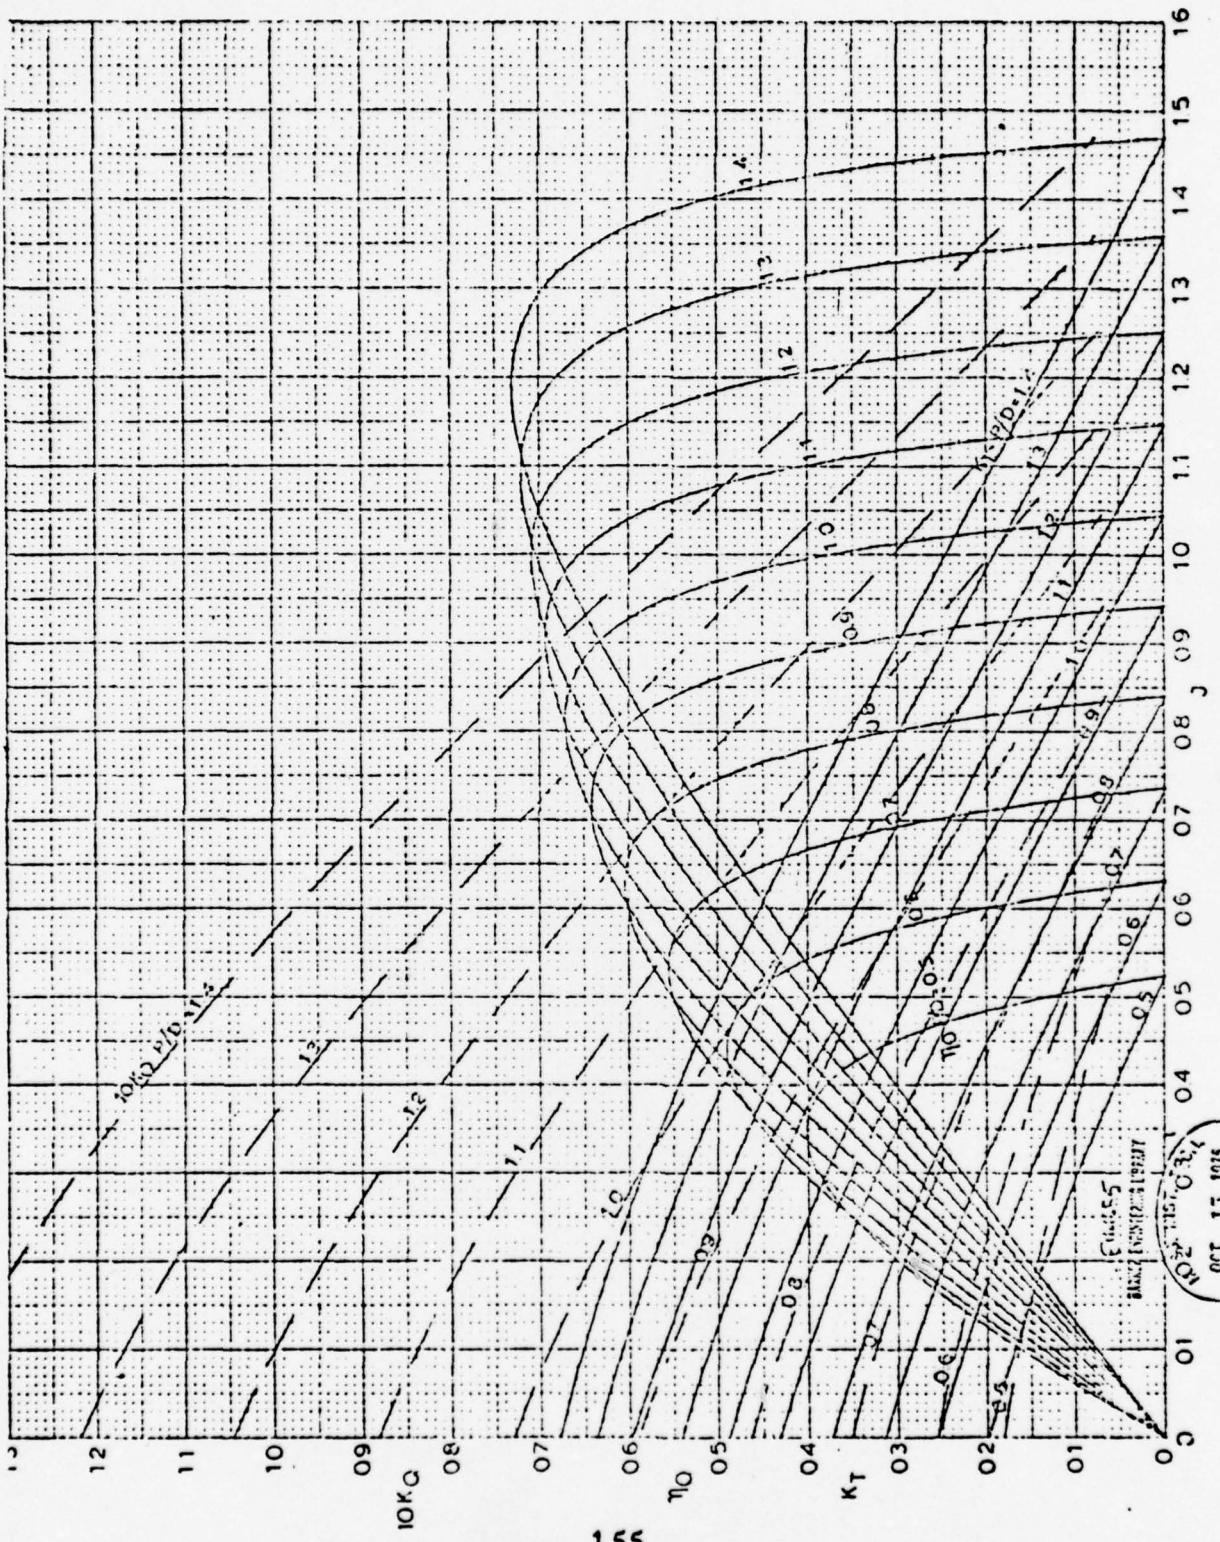
FIGURE V-18 Troost Curve: B5-90
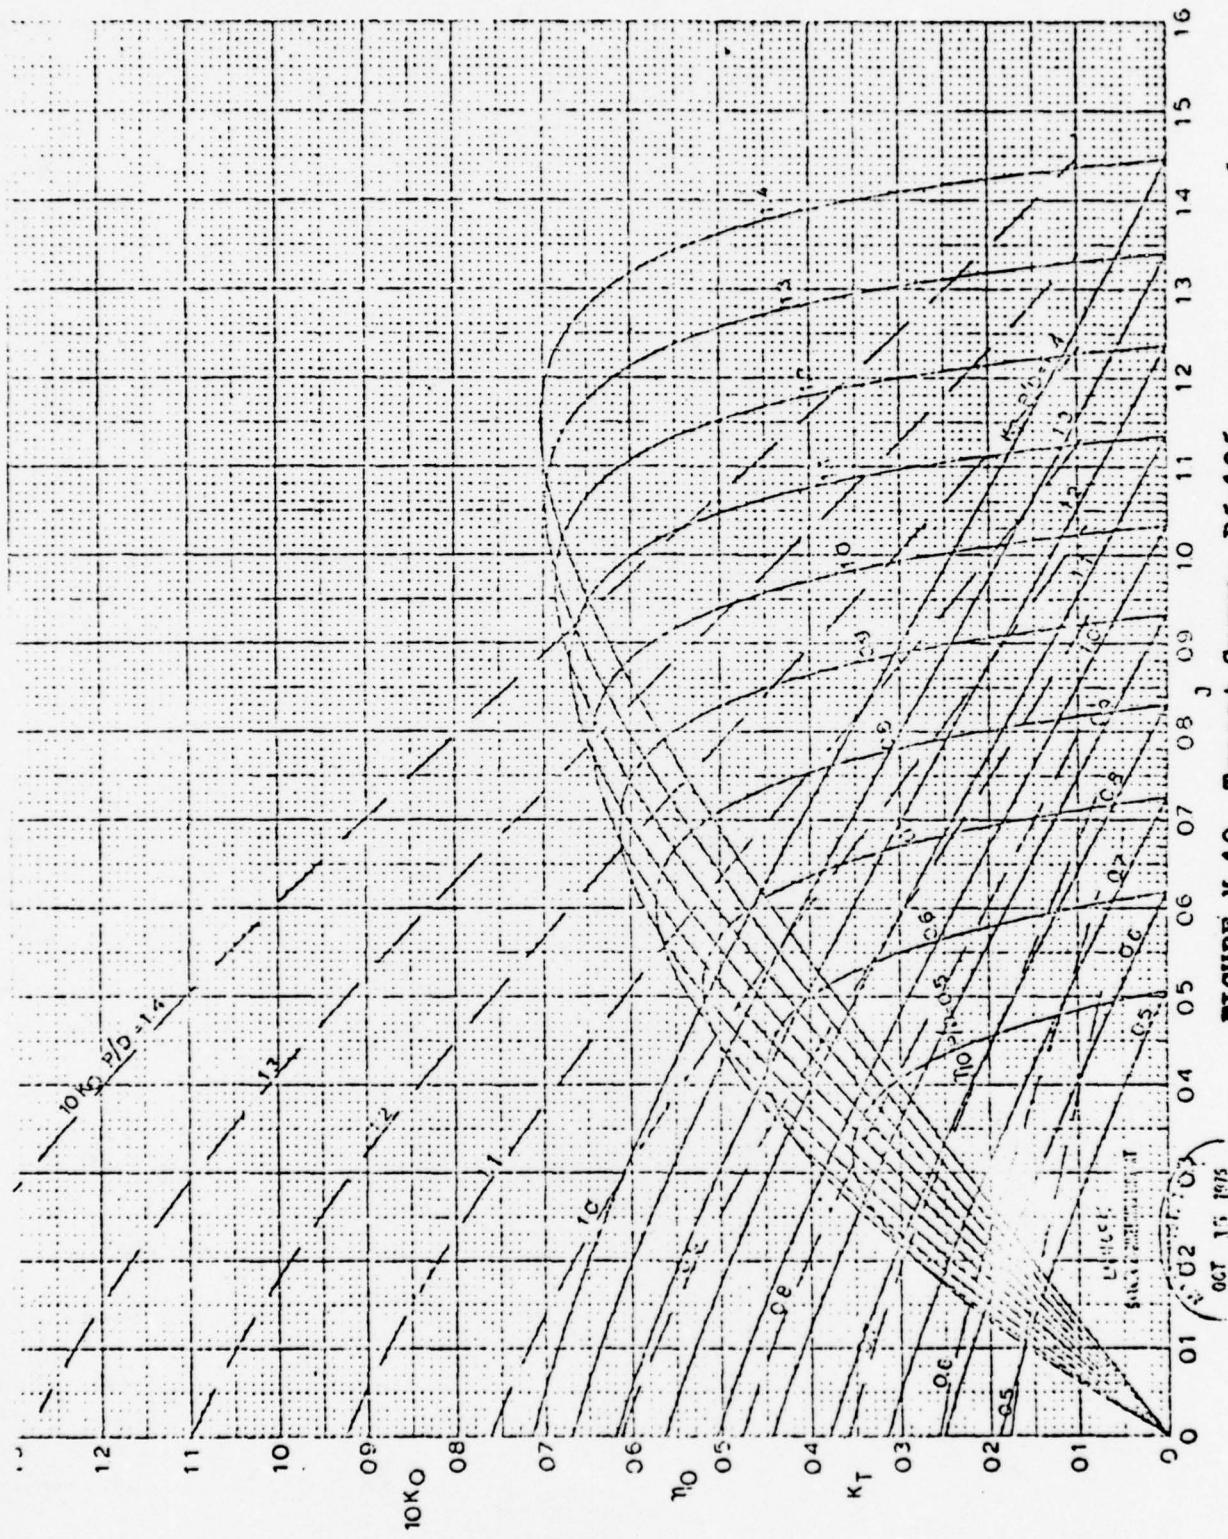
FIGURE V-19 Troost Curve, B5-105

156

APPENDIX VI - FOM SELECTION ANALYSIS

VI.1 <u>KEY AREAS</u> All propulsion plant designs have preferred characteristics. These key areas are usually singled out by the design requirements, design constraints and design philosophy. For a modern light weight frigate these areas might be as follows:

Cost	Manning
Weight	RMA
Volume	Irradiated Noise
Technical Risk	

VI.2 <u>FOM ASSIGNMENT</u> Assigning an FOM to each of the above areas is not nearly as subjective as presented in the following steps.

STEP 1   Prioritize the key areas

1. Cost   5. RMA
2. Weight   6. Technical Risk
3. Volume   7. Irradiated Noise
4. Manning

STEP 2   Determine the relative weighting of each area by assigning a value of '1' to the most important one, and a lesser value to each of the others. The relative weighting should reflect the importance of each area. This is the part of the analysis that is most easily compromised.

157

VALUE	REMARKS
Cost......... 1.00	Most important design factor
Weight....... 0.90	Critical factor, but not most important
Volume....... 0.87	Almost as important as weight
Manning...... 0.75	An important but not critical area
RMA.......... 0.68	About as important in its relationship to manning as weight is to cost
Technical.... 0.55 Risk	About half as important as cost in candidate selection
Irradiated... 0.50 Noise	Least important of key areas

Assume that prior to this FOM analysis three different propulsion plants were studied and the following results were generated.

	COGOG	CODOG	STEAM
Cost	34.2M	32.6M	31.8M
Weight	24LT	52.8LT	214LT
Volume	2,105FT^3	3,066FT^3	16,000FT^3
Manning (watchstanders)	11	15	34

158

STEP 3 The propulsion plant design output values (in each of the key areas) are compared and normalized: To determine their relative ratings. The 'best' plant in each area is assigned a value of '10', and the others are rated accordingly.

1. Costs:

Steam			10
CODOG	10	$\frac{31.8}{32.6}$ =	9.7
COGOG	10	$\frac{31.8}{34.2}$ =	9.2

2. Weight:

COGOG			10
CODOG	10	$\frac{24}{52}$ =	4.6
Steam	10	$\frac{24}{214}$ =	1.1

3. Volume:

COGOG			10
CODOG	10	$\frac{2105}{3066}$ =	6.9
Steam	10	$\frac{2105}{16000}$ =	1.3

4. Manning:

COGOG			10
CODOG	10	$\frac{11}{15}$ =	7.3
Steam	10	$\frac{11}{34}$ =	3.2

In areas that are not easily quantified, relative ratings assigned are based on qualatative studies. For this example the following values are used.

5. RMA:

Steam	10
COGOG	7
CODOG	6.5

159

6. Technical Risk:

Steam	10
COGOG	5
CODOG	5.5

7. Irradiated Noise:

Steam	10
COGOG	7
CODOG	5

STEP 4   Set up a table of the FOM's and the plant ratings. The product of these values represent individual plant FOM's. These plant FOM's are then summed to determine the plant with the highest overall rating.

KEY AREA	FOM	STEAM		COGOG		CODOG	
		RATING	FOM	RATING	FOM	RATING	FOM
Cost	1.0	10	10	9.2	9.2	9.7	9.7
Weight	.90	1.1	.99	10	9.0	4.6	4.14
Volume	.87	1.3	1.13	10	8.7	6.9	6.0
Manning	.75	3.2	2.4	10	7.5	7.3	5.48
RMA	.68	10	6.8	7	4.76	6.5	4.42
Tech Risk	.55	10	5.5	5	2.75	5.5	3.03
Irr Noise	.50	10	5	7	3.5	5	2.5
Σ FOM			31.82		45.41		35.27

TABLE VI-1

Table VI-1 shows that for the FOM's assigned and the plant ratings, the COGOG plant has a definite advantage over the other two.

161

VII.1 <u>FUNCTIONAL SCHEMATIC</u> System and subsystem reliability
models consist of a functional schematic. An example of a
reliability model for the combustion side of a boiler is
shown in Figure VII-1.

(a) Requirement for 50% power

(b) Requirement for 100% power
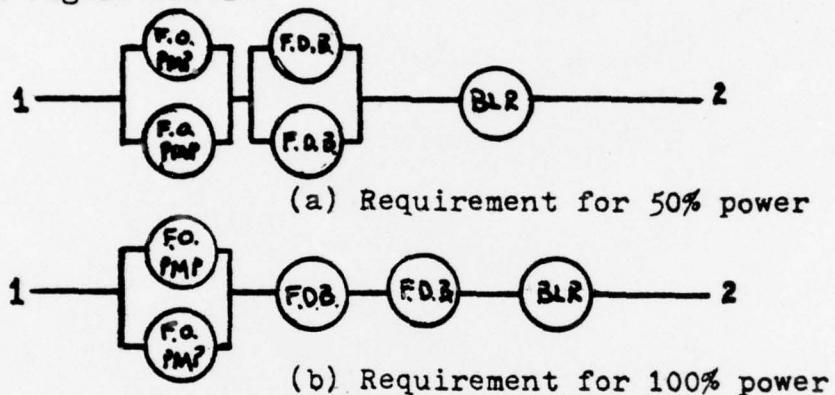
FIGURE VII-1

For the model in the figure to be operational, a com-
plete 'operational path' must exist between points 1 and 2.
Note that in both a and b only one fuel oil service pump is
required, yet for 100% power both forced draft blowers must
be operational.

An analysis of Figure VII-1 would determine its reliability
and availability at both power levels. The designer could
then evaluate the effects of variations in the system.

VII.2 RELIABILITY For non-repairable systems and components the following equation defines reliability: $R(t)$ is the system/component reliability.

$$R(t) = \exp(t/MTBF) = \text{probability of success} \approx 1-\lambda t \quad (12)$$

$$\lambda = \frac{1}{MTBF}$$

Series components: all components must function properly to obtain the desired results.

$$R_{sys} = R_1 \cdot R_2 \cdot R_3 \cdots R_n$$

Parallel components: either component functioning will provide the desired result.
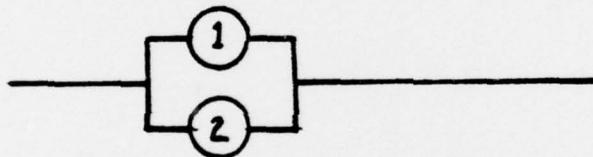
$$R_{sys} = R_1 + R_2 - R_1 R_2$$

Series parallel system
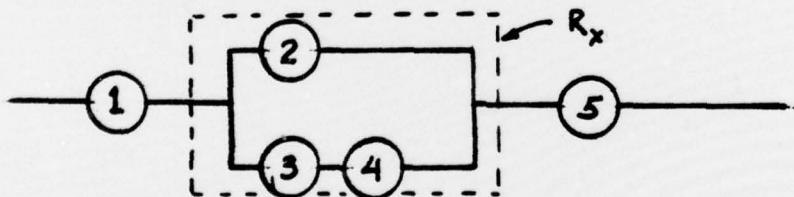
$$R_{sys} = R_1 \cdot R_x \cdot R_5$$
$$R_x = R_2 + R_{3,4} - R_2 \cdot R_{3,4}$$
$$R_{3,4} = R_3 \cdot R_4$$
$$R_{sys} = R_1 \cdot (R_2 + R_3 \cdot R_4 - R_2 \cdot R_3 \cdot R_4) \cdot R_5$$

163

VII.3 __AVAILABILITY__ Series, parallel and series-parallel
availability calculations are the same as they are for rel-
iability, but the defination is different.

$$A(\text{inherent}) = \frac{MTBF}{MTBF + MTTR}$$

VII.4 __EXAMPLE__ Before an example problem is shown, the
reliability of a repairable component should be defined:

$$R(t) = \frac{\mu + \lambda e^{-(\lambda + \mu)t}}{\mu + \lambda} \quad ; \mu = \frac{1}{MTTR} \quad , \lambda = \frac{1}{MTBF} \quad ; \quad (12)$$

Table VII-1 is a list of reliabilities for various
components of a gas turbine plant, and are the basis for
the reliability calculations. The reliability model will
be for a typical gas turbine plant , including the GT
fuel oil system and the reduction gear lube oil system.
Figure VII-2 shows the individual subsystems as well as
the complete system.

Reliability of fuel oil system
$$R_{m,p} = (R_{mtr} \cdot R_{pmp}) + (R_{mtr} \cdot R_{pmp}) - R_{mtr}^2 \cdot R_{pmp}^2$$
$$R_{m,p} \cong 1.0$$

$$R = \begin{cases} \dfrac{\mu + \lambda e^{-(\lambda + \mu)t}}{\mu + \lambda} & : \text{Repairable} \\ 1 - \lambda t & : NR \text{ (Non-Repairable)} \end{cases}$$

COMPONENT	MTBF	MTTR	R
LM 2500	4,000	24	.994
CLUTCH	50,000	NR	.986
REDUCTION GEAR	200,000	NR	.996
SHAFT & BEARINGS	200,000	NR	.996
CRP PROPELLER	25,000	15	.999
FUEL OIL MOTOR	7,500	18	.998
FUEL OIL PUMP	5,500	4.5	.999
FUEL OIL HEATER	15,000	3.8	1.00
FUEL OIL FILTER	60,000	3.0	1.00
FUEL SEPERATOR	10,000	4.0	1.00
LUBE OIL MOTOR	7,500	7.8	.999
LUBE OIL PUMP	4,000	5.0	.999
LUBE OIL STRAINER	60,000	3.0	1.00
LUBE OIL COOLER	90,576	3.0	1.00
SALT WATER COOLING MOTOR	27,000	9.2	1.00
SALT WATER COOLING PUMP	12,500	7.6	.999
BOILER	15,000	12	.999
FORCED DRAFT BLOWER: MTR	4,200	7	.998
FORCED DRAFT BLOWER: TRB	2,800	6	.997
MAIN FEED PUMP	2,500	14	.994
MAIN FEED BOOSTER PUMP	5,500	14	.997
STEAM PROPULSION TURBINE	100,000	10	1.00
FIXED PITCH PROPELLER	200,000	NR	.996
MAIN CONDENSER	50,000	5	1.00
MAIN CONDENSATE PUMP	5,400	10	1.00
MAIN LUBE OIL PUMP	4,000	5	.999
TURBINE GENERATOR	3,500	8	.998
DIESEL GENERATOR	1,900	8	.996
LUBE OIL PURIFIER	10,000	4	1.00

The above reliabilities are based on a 30 day (720 hrs) operational time.

TABLE VII-1   RELIABILITIES OF VARIOUS PROPULSION
              PLANT COMPONENTS (12)

MODEL OF GAS TURBINE PLANT

GAS TURBINE

TRANSMISSION

FUEL OIL SYSTEM
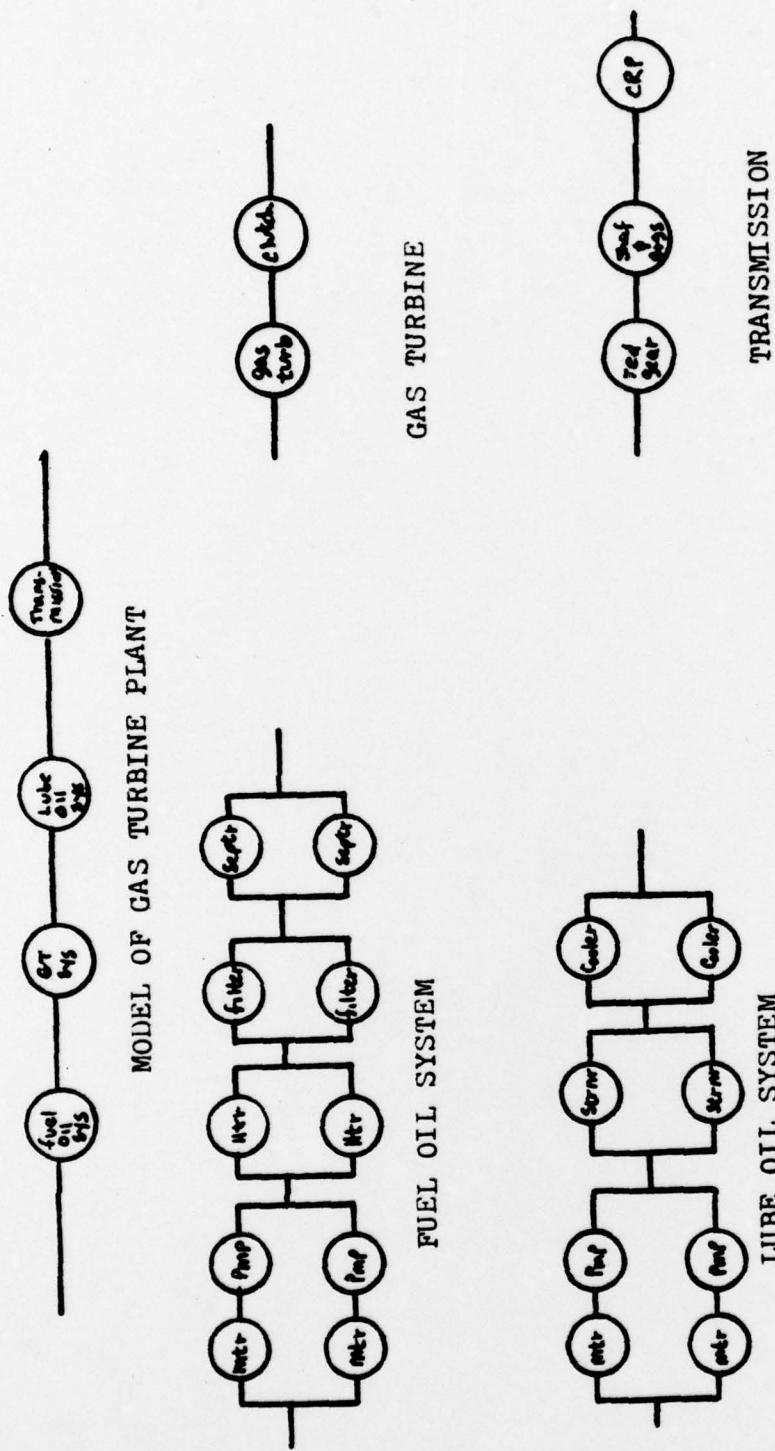
LUBE OIL SYSTEM

FIGURE VII-2 SYSTEM AND SUBSYSTEM FUNCTIONAL SCHEMATICS

166

$$R_{htr} = 2 \cdot R_{htr} - R_{htr}^2$$

$$R_{htr} \cong 1.0$$

$$R_f = 2 \cdot R_f - R_f^2$$

$$R_f \cong 1.0$$

$$R_s = 2 \cdot R_s - R_s^2$$

$$R_s \cong 1.0$$

$$R_{f.o. sys} = R_{m,p} \dot{R}_{htr} \dot{R}_f \cdot R_s$$

$$R_{f.o. sys} \cong 1.0$$

Reliability of lube oil system

$$R_{m,p} = (R_{mtr} \dot{R}_{pmp}) + (R_{mtr} \dot{R}_{pmp}) - R_{mtr}^2 \cdot R_{pmp}^2$$

$$R_{m,p} \cong 1.0$$

$$R_{strnr} = 2 \cdot R_{strnr} - R_{strnr}^2$$

$$R_{strnr} \cong 1.0$$

$$R_{clr} = 2 \cdot R_{clr} - R_{clr}^2$$

$$R_{clr} \cong 1.0$$

$$R_{l.o. sys} = R_{m,p} R_{strnr} R_{clr}$$

$$R_{l.o. sys} \cong 1.0$$

Reliability of gas turbine system

$$R_{gt} = .994$$
$$R_{cl} = .986$$

$$R_{gt\ sys} = R_{gt} \cdot R_{cl}$$
$$R_{gt\ sys} = .98$$

Reliability of reduction gear, shafting & bearings and crp propeller

$$R_{rg} = .996$$
$$R_{sh\&brg} = .996$$
$$R_{crp} = .999$$

$$R_{trans} = R_{rg} \cdot R_{sh\&brg} \cdot R_{crp}$$
$$R_{trans} = .991$$

Reliability of entire gas turbine system

$$R_{gt\ sys} = R_{f.o.\ sys} \cdot R_{l.o.\ sys} \cdot R_{gt\ sys} \cdot R_{trans}$$
$$R_{gt\ sys} = .971$$

168

REFERENCES

1. D'Arcy, Ronald J ,"Propulsion Systems", MIT Professional Summer Course on Naval Surface Ship Design, June 1977.

2. Comstock, John P , ed. <u>Principles of Naval Architecture</u>, New York: The Society of Naval Architects and Marine Engineers, 1967.

3. Graham, C and Hamly, R , "Simplified Math Model for The Design of Naval Frigates", Massachusettes Institute of Technology, Department of Ocean Engineering, Course 13.411 Handout.

4. Reliability and Maintainability Engineering in The Marine Industry, The Society of Naval Architects and Marine Engineers, Technical and Research Bulletin 3-22.

5. "Conceptual Design of Ship's Model (codeship)(u)", Center for Naval Analyses, Research Contribution 159, Volumes I Through IV, December 1971.

6. Menz, M. G. , "Ship Design Analysis--Machinery Box Estimating Procedures", Naval Ship Engineering Center Memo 6152: MGM:dcd, Ser 131, 29 April 1969.

7. Graham, Clark Lcdr, USN, "Comparative Naval Ship Design", MIT Professional Summer Course Notes, September 1977.

8. Harrington, Roy L, ed. , <u>Marine Engineering</u> , Published by The Society of Naval Architects and Marine Engineers

9. Reed, Michael Robert, "Ship Synthesis Model for Naval Surface Ships", Massachusettes Institute of Technology, Department of Ocean Engineering, Thesis, May 1975.

10. Goodwin, Michael J, "Ship Synthesis Model for Coast Guard Cutters", Massachusettes Institute of Technology, Department of Ocean Engineering, Thesis, May 1975.

11. Surface Effects Ships Propulsion Technology Design Manual, Volume I Prime Movers; Department of the Navy, Naval Sea Systems Command Surface Effects Ships Project, PMS 304; May 1974.

169

12. Ship Power and Propulsion, Course 13.21, notes;
    Massachusetts Institute of Technology, Department of
    Ocean Engineering.

13. Dudley, D.W., *Practical Gear Design*, McGraw Hill.

14. "Mathmatical Model and Dynamic Analysis Guide for Main
    Propulsion Shafting", Supervisor of Shipbuilding, USN,
    Third Naval District report SUPSHIPS 280-1, July 1968.

15. Surface Effects Ships Propulsion Technology Design Manual,
    Volume II Transmissions; Department of the Navy,
    Naval Sea Systems Command Surface Effects Ships Project,
    PMS 304; May 1974.

INDEX